

Pin busbar, 16 mm<sup>2</sup> connection: 6x 1-phase touch-safe



Figure similar

Model		
product brand name	SENTRON	
product designation	Pin busbar	
design of the product	16 mm <sup>2</sup> , 6x1PH	
General technical data		
phase number	1	
cross-section	16 mm <sup>2</sup>	
Main circuit		
operational current / rated value	80 A	
Product details		
product feature / insulated	Yes	
Connections		
type of electrical connection	Pin	
Mechanical Design		
width	3.8 mm	
length	105 mm	
net weight	22.72 g	
General Product Approval	Declaration of Conformity	other

[Miscellaneous](#)



[Miscellaneous](#)

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3631>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3631>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3631](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3631)

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

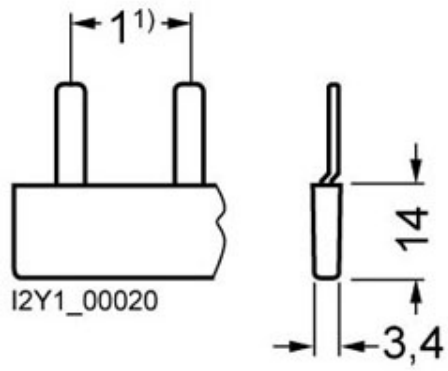

1) Pin spacings in MW (Modular widths, 1 MW = 18 mm).

