



CIRCUIT-BREAKER SZ S00,
FOR MOTOR PROTECTION, CLASS 10,
A-RELEASE 0.11...0.16A,
N-RELEASE2.1A SCREW CONNECTION,
STANDARD SW. CAPACITY

General technical data:		
product brand name		SIRIUS
Product designation		3RV2 circuit breaker
Size of the circuit-breaker		S00
Size of contactor / can be combined / company-specific		S00
Number of poles / for main current circuit		3
Product function		
• Short circuit protection		Yes
• overload protection		Yes
• Phase failure detection		Yes
• System protection		Yes
• motor protection		Yes
• motor protection with overload relay function		No
• starter protection		No
• Transformer protection		No
• Disconnecter functionality		Yes
• Main switches with supply disconnect function and EM-STOP switches		No
Design of the operating mechanism		selector switch
Product component		
• Auxiliary switch		No

• undervoltage release		No
• Trip indicator		No
Product expansion		
• Auxiliary switch		Yes
• optional / motor drive		No
Insulation voltage / with degree of pollution 3 / Rated value	V	690
Surge voltage resistance / Rated value	kV	6
Protection class IP		
• of the terminal		IP20
• on the front		IP20
Protection against electrical shock		finger-safe
Installation altitude / at height above sea level / maximum	m	2,000
Relative humidity		
• during operation	%	10 ... 95
Ambient temperature		
• during transport	°C	-50 ... +80
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
Shock resistance / acc. to IEC 60068-2-27		25g / 11 ms
Usage category		
• acc. to IEC 60947-4-1		AC-3
Active power loss / total / typical	W	5

Main circuit:		
Operating current / Rated value	A	0.16
Operating voltage / Rated value	V	690
Type of voltage / for main current circuit		AC/DC
Operating frequency		
• Rated value	Hz	50 ... 60
Operating current / at AC-3 / at 400 V / Rated value	A	0.16

Protective and monitoring functions:		
Type of protection		Increased safety
Certificate of suitability / ATEX		Yes
Design of the overload circuit breaker		thermal
Adjustable response value current / of the current-dependent overload release	A	0.11 ... 0.16
Trip class		CLASS 10
Design of the short-circuit trip		magnetic

Response value current / of the instantaneous short-circuit release	A	2.1
Operational short-circuit current breaking capacity (Ics) / with AC		
• at 240 V / Rated value	kA	100
• at 400 V / Rated value	kA	100
• at 500 V / Rated value	kA	100
• at 690 V / Rated value	kA	100
Maximum short-circuit current breaking capacity (Icu)		
• with AC / at 240 V / Rated value	kA	100
• with AC / at 400 V / Rated value	kA	100
• with AC / at 500 V / Rated value	kA	100
• with AC / at 690 V / Rated value	kA	100
Breaking capacity short-circuit current (Icn)		
• with 1 current path / for DC / at 150 V / Rated value	kA	10
• with 2 current paths in series / for DC / at 300 V / Rated value	kA	10
• with 3 current paths in series / for DC / at 450 V / Rated value	kA	10

Installation/ mounting/ dimensions:

Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
mounting position		any
Depth	mm	96
Height	mm	97
Width	mm	45

Connections/ terminals:

Arrangement of electrical connectors / for main current circuit		Top and bottom
Design of the electrical connection / for main current circuit		screw-type terminals
Type of connectable conductor cross-section		
• for main contacts		
• single or multi-stranded		2x (0,75 ... 2,5 mm²), 2x 4 mm²
• finely stranded		
• with core end processing		2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
• for AWG conductors / for main contacts		2x (18 ... 14), 2x 12

UL/CSA ratings:

Operating voltage / acc. to UL 60947 / Rated value	V	600
Full-load current (FLA) / for three-phase AC motor		
• at 480 V / Rated value	A	0.16
• at 600 V / Rated value	A	0.16

Certificates/ approvals:

General Product Approval			Declaration of Conformity	Test Certificates	
				Special Test Certificate	Type Test Certificates/Test Report
CCC		UL	EG-Konf.		

Shipping Approval

					
ABS	BUREAU VERITAS	DNV	GL	LRS	PRS

Shipping Approval

other

		Confirmation		other	Environmental Confirmations
RINA	RMRS		VDE		

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RV2011-0AA10/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV2011-0AA10

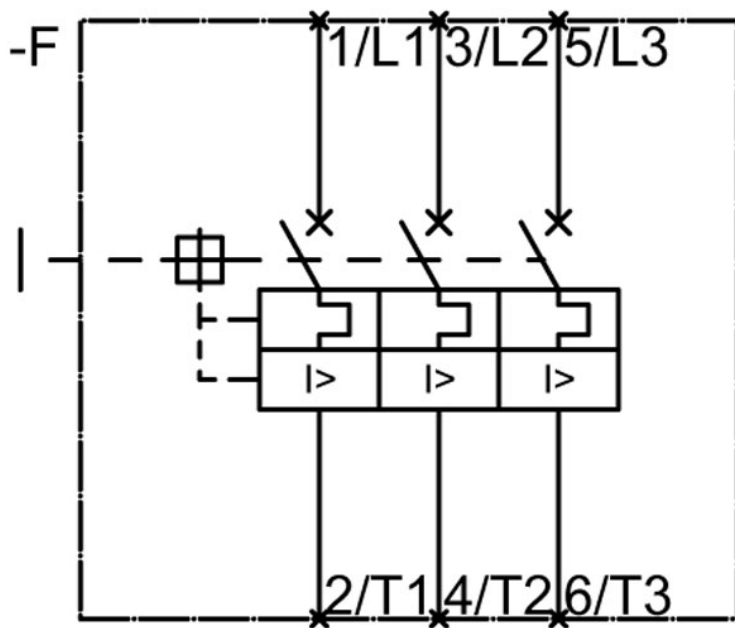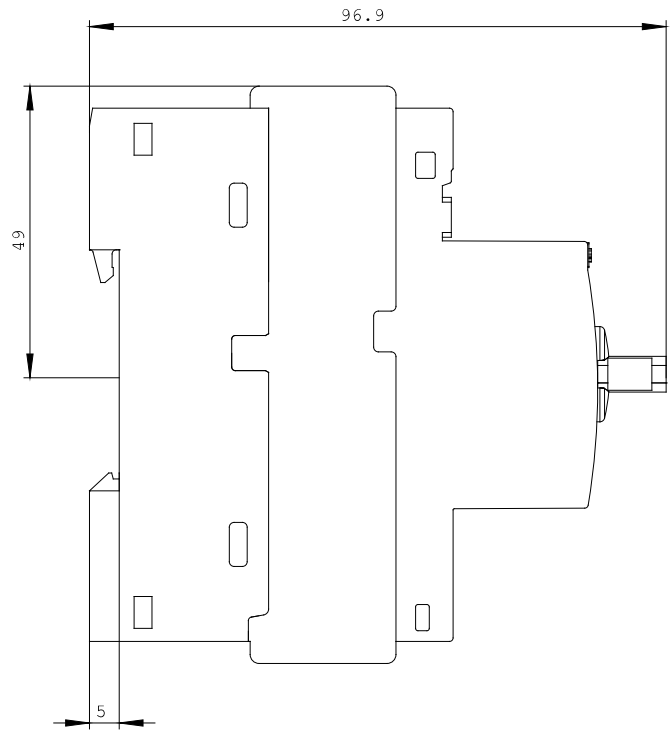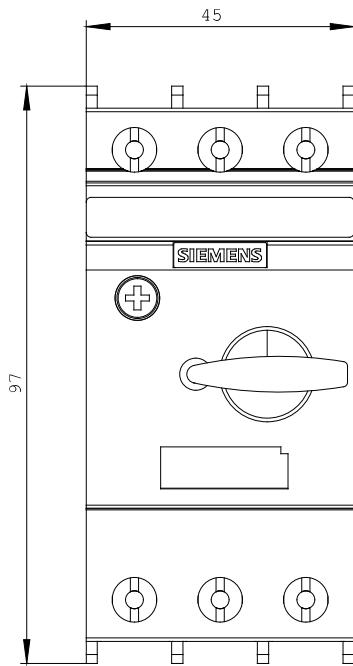

last change:

Dec 18, 2014