


STAHL

R. STAHL, INC.

9012

HAZARDOUS LOCATION ELECTRICAL PRODUCTS

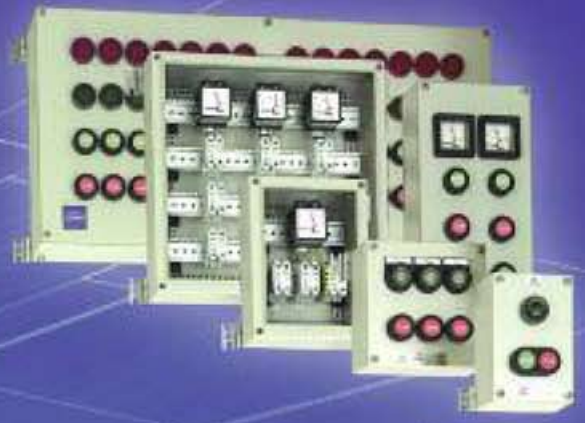

# electrical catalog 9012

Hazardous Location Electrical Products



Innovative Global Explosion Protection by R. STAHL



SIL

Safety Integrity Level

IEC 61508 IEC 61511

Dust-Ex



<b>Capabilities</b> .....	<b>i-ix</b>
<b>Explosion Protection</b> .....	<b>A-A17</b>
Hazardous Location Overview .....	A1-A14
Useful Tables .....	A15-A17
<b>Luminaires</b> .....	<b>B-B28</b>
EXLUX 6000 Series Fluorescent Luminaires (for Zone 1 & 2, Div. 2) .....	B1
EXLUX 6008 Series Fluorescent Emergency Luminaires (for Zone 1 & 2, Div. 2) .....	B2
EXLUX 6400 Series Fluorescent Luminaires (for Zone 2, Div. 2) .....	B3
EXLUX 6408 Series Fluorescent Emergency Luminaires (for Zone 2, Div. 2) .....	B4
ECOLUX 6600 Series Fluorescent Luminaires (for Zone 2, Div. 2) .....	B9
ECOLUX 6608 Series Fluorescent Emergency Luminaires (for Zone 2, Div. 2) .....	B10
6480 Series H.I.D. Luminaires 50-400 W (for Zone 2, Div. 2) .....	B14-B27
8040 Light Switch .....	B28
<b>Terminal Boxes</b> .....	<b>C-C40</b>
8150 Terminal Boxes, Stainless .....	C1-C14
8125 Series Terminal Boxes, Metallic .....	C15-C26
8146 Series Terminal Boxes, FRP .....	C27-C40
<b>Plugs &amp; Receptacles</b> .....	<b>D-D7</b>
SolConeX 8570/2 Series, 20A .....	D1-D2
SolConeX 8571/2 Series, 30A .....	D1-D2
CES 8579/4 Series, 63A .....	D3
CES 8581/2 Series, 125A .....	D3
CRP 8125/5 Series, Clean Room Receptacle Panels .....	D6-D7
<b>Control Devices</b> .....	<b>E-E10</b>
PanSiC 8003 Series Panel Mounted Control Devices .....	E1-E4
PanSiC 8013 Series Panel Mounted LED Pilot Lights .....	E5
PanSiC 8018 Series Panel Mounted Illuminated Push Buttons .....	E6
8415 Series Panel Mounted LED Pilot Light Assembly .....	E9
8703 Series Panel Mounted Push Button Assembly .....	E10
<b>Control Stations</b> .....	<b>F-F39</b>
ConSig 8040 Series, FRP .....	F1-F15
8150/5 Series Control Stations, Stainless .....	F16-F21
8125/5 Series Control Stations, Metallic .....	F22-F28
8146/5 Series Control Stations, FRP .....	F30-F36
8560 Series, Small Fuses .....	F37
8403/8404 Series, Ammeters & Voltmeters .....	F38
8082/1-1-01 Lockout Terminal .....	F39
<b>Alarm Equipment</b> .....	<b>G-G3</b>
8146 Series Fire Alarm Stations .....	G1
Yodalex Sounder/Horn/Strobe .....	G2-G3
<b>Distribution</b> .....	<b>H-H13</b>
8146/5-6 Series Disconnect Switches .....	H1-H3
Broz Series Breaker Panel .....	H4-H5
8146/5 Series Breaker Panels .....	H6-H13
<b>Explosion Proof &amp; Dust Ignition Proof Enclosures</b> .....	<b>I-I12</b>
GUBox 8265 Explosion Proof & Dust Ignition Proof Enclosures with Threaded Cover .....	I1-I15
CUBex 8264 Explosion Proof & Dust Ignition Proof Enclosures .....	I6-I12
<b>Accessories</b> .....	<b>J-J9</b>
8166/11 Hazardous Location Conduit Hubs .....	J1
8162/9 Breather Drain .....	J2
Cable Glands and C2KX, T3C0S, TMCX, TMC, PX2KX, PXSS2KREX .....	J3-J8
Accessories .....	J9

*Our products are updated to the newest standard developments and technologies which makes it necessary to reserve the right to product changes without notice.*



## R. STAHL in North America

R. STAHL, INC. has been in North America for almost 30 years. Located in Houston, Texas and Alberta, Canada, we have expanded to include over 40 representatives throughout the Americas. Our service is unmatched, with qualified technical experts that can be reached in real time, not seven hours away in Europe.

### Expertise where safety knows no compromise

One hundred thirty years after our founding, with facilities strategically located on five continents, R. STAHL is acknowledged as the world's foremost innovator in explosion-protected components and systems for Automation, Control and distribution, Operations and monitoring, Lighting and Signals & Alarms.


Our commitment to the Americas commenced in 1979 when R. STAHL introduced intrinsic safety technology to the North American market. It rose to greater prominence in the mid-1990s, when R. STAHL played a leading advocacy role in the harmonization of the U.S. National Electrical Code (NEC) and the International Electrical Code (IEC). Changes made at that time yielded increased global standardization, and produced heightened efficiencies and maintenance benefits for international markets.

Our expertise also covers related areas of safety engineering such as functional safety, SIL and FDA. International certifications, approvals, and patents underline our expertise and make it possible for R. STAHL products to be used anywhere in the world. One thing is certain: on the basis of experience and international synergies, we continue to deliver technological innovations tailored to your individual needs.

#### **Benefits**

- *All protection methods available*
- *Over 3000 certificates for explosion protection issued*
- *More than 70 active patents*
- *Technical training*
- *Member of many international committees, technical commissions and research groups (Profibus, Fieldbus Foundation, HART etc.)*
- *In-house testing laboratory*

PEACE OF MIND

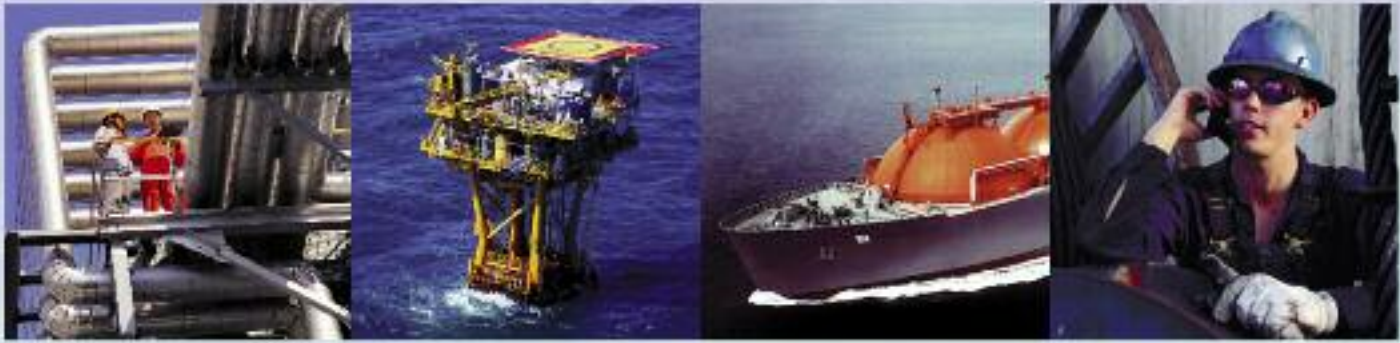**Our Mission**

*"We provide products and services to protect the most valuable – and often irreplaceable – assets of some of the most critical industries on Earth."*

**Applications**

- Petroleum and natural gas deliveries
- Petroleum and natural gas storage and transporters
- Petrochemical industry
- Chemical industry
- Pharmaceutical industry
- Food product, beverage and tobacco industries
- Shipbuilding and offshore industries
- Food processing industry
- Water purification
- Automotive
- Original equipment manufacture

In the production, processing, transportation and storage of many materials, grave danger can exist. Flammable gasses, vapors, mists and dusts can occur that, when combined with oxygen in the air, form an explosive atmosphere. Given a source of ignition, these substances can detonate and destroy life and property in seconds.

Our job at R. STAHL is to create products and deliver services to eliminate the possibility of such an incident. And in fulfilling this role, we offer *More than Protection. Peace of Mind.* Our products are the most innovative in the world.

**Promises to our customers**

- We provide you the best engineering minds available to protect your people and property from explosions.
- We offer you only products we know to embody the finest technology and craftsmanship.
- We carefully develop and engineer the right solutions for your individual applications.
- We deliver your products and services quickly and efficiently.
- We serve you in a manner that places Stahl above our competitors in providing you "peace of mind" concerning the safety of your people and property.

COMMITTED TO TEAMWORK



### **Production Plants:**

- Houston
- Waldenburg
- Weimar
- Cologne
- Hengelo
- Stavanger
- Chennai
- Shanghai

R. STAHL's global headquarters is located in Waldenburg Germany. Located in Houston, Texas, R.STAHL Inc. is proud of its world class manufacturing, engineering and technical service competency. Here our engineers work together in teams to develop tailor-made, reliable and cost-effective solutions for complex systems worldwide. Project management and production departments work side by side in state of the art facilities to foster communication and cooperation between all departments throughout the entire production process. Flat hierarchies, flexibility, and open dialog describe our culture. Our large portfolio of components and systems, one of the most comprehensive in the world, is the basis for our explosion protection system solutions, all of which are carefully designed to work seamlessly with each other. This guarantees our customers the reliability they require and the assurance that a project will be successful. Our expert representatives will update you on your project status at any time. Our other manufacturing facilities located in Weimar and Cologne (Germany), Stavanger (Norway), Hengelo (Netherlands), Chennai (India) and Shanghai (China) adhere to the same high standards.



### Development

- 6% of our annual revenue is reinvested in the innovation process
- 40% of our revenue has been generated with products launched into the market in the past five years
- We actively participate in international committees
- We use state of the art CAD systems and provide rapid prototyping



### Laboratory/Certification

- All key tests are performed on site in our own state of the art testing facilities
- We hold over 3,000 international certificates for explosion protection, shipping vessel approvals and functional safety
- We offer factory accepted testing for domestic and international projects





### **Project Planning**

- Extensive cooperation with customers to develop the optimal solution
- Highly skilled engineers with international experience design solutions based on your individual needs




### **Production**

- Manufacturing plants located in:  
Houston, Texas (USA),  
Waldenburg, Weimar & Cologne (Germany),  
Hengelo (Netherlands)  
Stavanger (Norway),  
Shanghai (China) and  
Chennai (India)
- Flexible production and organized manufacturing provides effective communication between all departments
- In-house occupational training center with educated trainers
- In-house tool-and-die manufacturing facilities



### Quality Management

- ISO 9000 certified in 1993 and ISO 9001 in 2004
- Quality management process covers the whole supply chain
- Quality management system is approved by PTB
- Calibration laboratory monitors over 2,000 items of electrical and mechanical test equipment
- Production process is covered by quality assurance

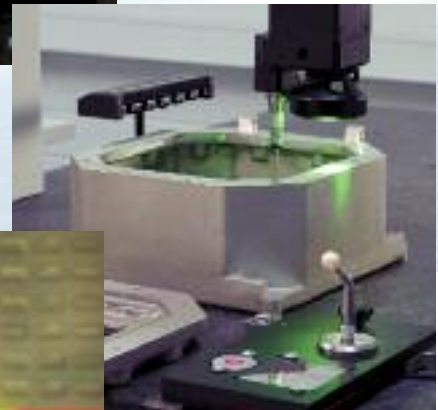

### On-site Acceptance Testing

- State of the art testing and inspection equipment
- Intensive technical support
- Personnel are continuously trained on the latest technology
- On-site consultants are in direct contact with development product managers





### **After-Sales Service**


- *Extended warranty on products and services*
- *Field service engineers available*
- *Competent information given by telephone and email*



### **Logistics**

- *Efficient and economical workflow*
- *Modern, fully automatic high-bay warehouse*
- *Production organized on the kanban principle*

WE HAVE YOU COVERED

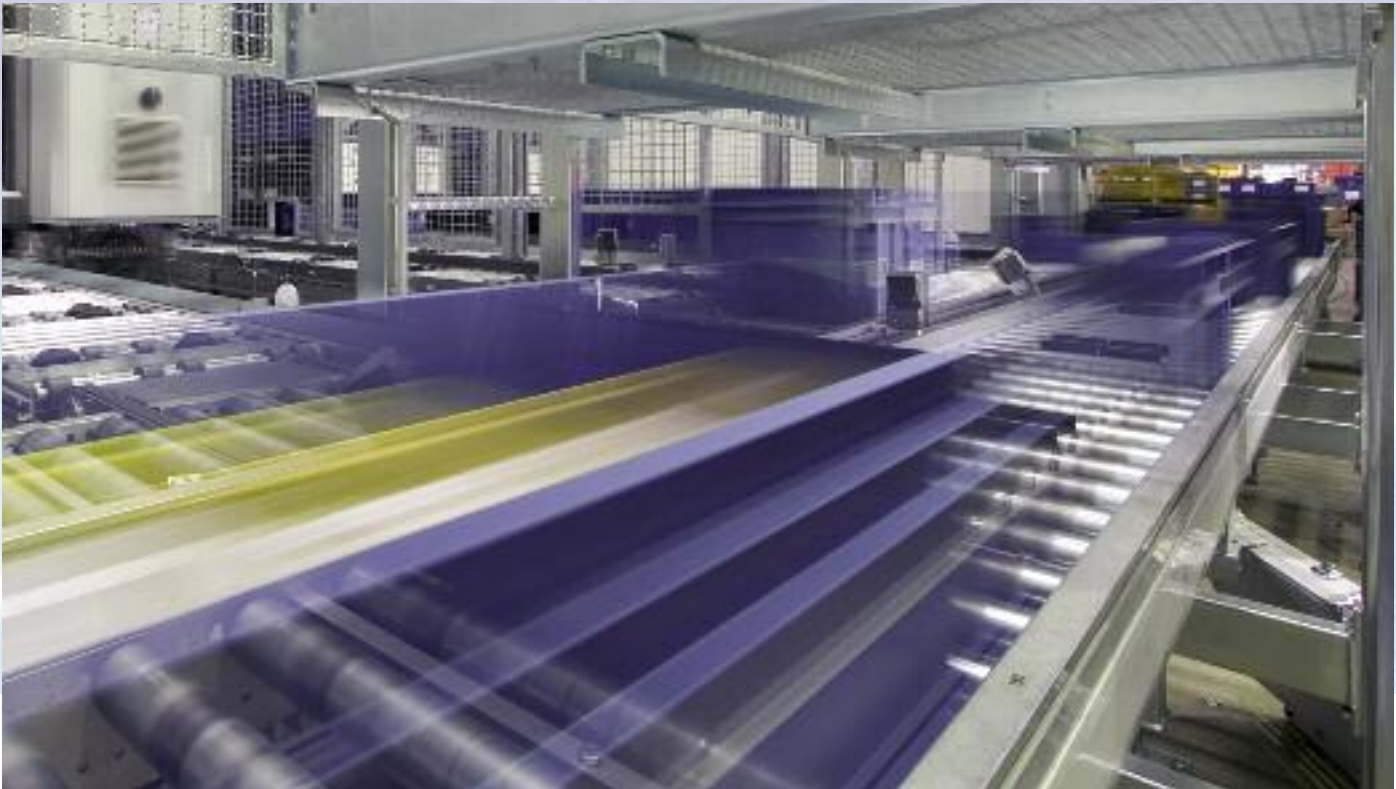

Protecting lives and equipment is R. STAHL's highest priority. When you partner with R. STAHL in this endeavor you can be assured that our customized, technically advanced, comprehensive products and services receive the highest quality of service.

### ***OEM service***

On a worldwide basis, Original Equipment Manufacturers are continuously looking to expand their markets for existing and new system designs. When market opportunities arise that require ATEX or IEC certification for markets, such as Europe, the Middle East, Asia and Russia, R. STAHL is the preferred partner. In North America, producing custom, quality products — often with extremely tight turn-around — is an R. STAHL specialty.

With our more than fifty years of Experience, we stand ready to guide and educate OEMs and their engineering teams in meeting global electrical codes and standards in all harsh environments and hazardous (classified) locations.



- *Development of individual solutions*
- *Technical service*
- *After-sales service*
- *Expert information available via hotlines*
- *Global distribution network*
- *Relevant information via [www.rstahl.com](http://www.rstahl.com)*
- *Permanent order status updates*
- *Flexibility*
- *Quality management*
- *Fast, reliable shipping*
- *24-hour turnaround on pick-and-pull items*
- *International customer support*
- *International shipping*
- *Training*

GOOD TO KNOW



- *Training programs*
- *In-house training center*
- *Training classes conducted at the customer's facility*

Competent and trained employees are the most important link in a safe production chain. Remaining at the top of an industry requires committed employees who work diligently with new technologies and implement new safety regulations. At R. STAHL, we are aware of this and make our expert knowledge available to you by conducting training classes. Individuals may choose to take advantage of a basic or advanced training class. Theory and practice are conveyed in equal measure by our specialists. Individuals may choose to have training classes at their own location or at our facility. R. STAHL training classes provide participants with valuable knowledge pertaining to engineering, scientific principals and implementation of the NEC, CEC and ATEX requirements.

STAHL

## Understanding Global Explosion Protection

- Class and Division System
- Class and Zone System
- ATEX/CENELEC Zone System
- IEC

?

Zone 0

?

IP

Class II

?

Zone 2

Zone 1

Ex

Division 2

CEC  
NEC

?

Class I

?

Division 1

**Basics of Explosion Protection**

**HAZARDOUS LOCATIONS**

Hazardous locations are defined as premises, buildings or parts thereof where fire or explosion hazards may exist due to the presence of flammable gases or vapors, flammable liquids, combustible dusts, or easily ignitable fibers or flyings.

Although, flammable gases, vapors and combustible dusts exist almost everywhere, fortunately, they are present only in minute quantities. Simply because flammable gases or vapors, or combustible dusts are present, there is not necessarily a hazardous location. The quantities or concentrations must be sufficient to present a potential explosion hazard.

The electrical codes that deal with these types of hazardous locations areas do not deal with materials such as high explosives, such as dynamite, munitions, or fireworks. Other rules and regulations deal with areas involving these materials.

**Understanding “Global” Hazardous Location Requirements**

The evolution of hazardous location electrical codes and standards throughout the world has taken two distinct paths. In North America, a “Class, Division” System has been used for decades as the basis for area classification of hazardous (classified) locations. Because the hazards and methods of protecting electrical equipment against these hazards differ for different materials, hazardous locations are divided into three Classes, and two Divisions. The Classes are based on the type of hazard and the explosive characteristics of the material with the Divisions being based on the occurrence or risk of fire or explosion that the material presents. While the United States and Canada have some differences in acceptable wiring methods and product standards, their systems are very similar.

In other parts of the world, areas containing explosive atmospheres are dealt with using the “Zone System”. Zones are based predominantly on the International Electrotechnical Commission (IEC) and European Committee for Electrotechnical Standardization (CENELEC) standards. Whereas North America deals with multiple types of hazardous atmospheres.

**HAZARDOUS LOCATION BASICS**

In North America, hazardous locations are separated into three “Classes” or types based on the explosive characteristics of the materials. The Classes or type of material is further separated into “Divisions” or “Zones” based on the release of the flammable material. The Zone system has three levels of hazard versus the Division System’s two levels.

<b>Hazardous Materials</b>	<b>Class/Division System</b>	<b>Zone System</b>
Gases or Vapors	Class I, Division 1	Zone 0 Zone 1
	Class I, Division 2	Zone 2
Combustible Dusts <sup>^</sup>	Class II, Division 1	Zone 20 Zone 21
	Class II, Division 2	Zone 22
Fibers or Flyings	Class III, Division 1	Zone 20 Zone 21
	Class III, Division 2	Zone 22

The United States and Canada have adopted Zones for Gases and Vapors

<sup>^</sup> Zones 20, 21 and 22 for Dust are adopted by Europe and the U.S. but not by Canada.

## Class I Locations

Class I locations are those in which flammable “gases or vapors” are, or may be, present in the air in quantities sufficient to produce explosive or ignitable mixtures. The terms, “gases or vapors” differentiates between materials that are in a gaseous state under normal atmospheric conditions, such as hydrogen or methane, and a vapor that is flashed off from a liquid, under normal atmospheric conditions, such as gasoline.


The subdivision of Class I, locations into “Divisions” or “Zones” is based on the probability that an explosive gas atmosphere may be present in a location. If the risk is extremely low, the location is considered unclassified. A good example of a low risk area is a single family home with natural gas or propane furnace for heating. The gas could, and does on extremely rare occasions, leak into the home, encounter an ignition source and an explosion occurs, usually with devastating results. However, since the risk is so low, because of the safety systems built into the gas supply and heating equipment, these areas are not “hazardous (classified) locations”.

Recent editions of the **NEC**<sup>®</sup> (National Electrical Code) and **CEC**<sup>®</sup> (Canadian Electrical Code) have incorporated the international definitions for “Zones” for Class I, locations. The two codes continue to address the “Division” system although the methods are somewhat different.

The frequency of occurrence determines the level of hazard for a location. Simply stated, the longer the material is present, the greater the risk.

Frequency of Occurrence	Division System	Zone System
Continuous	Class I, Division 1	Zone 0
Intermittent Periodically		Zone 1
Abnormal Condition	Class I, Division 2	Zone 2

The charts below compare the Division and Zone systems in terms of risk assessment.

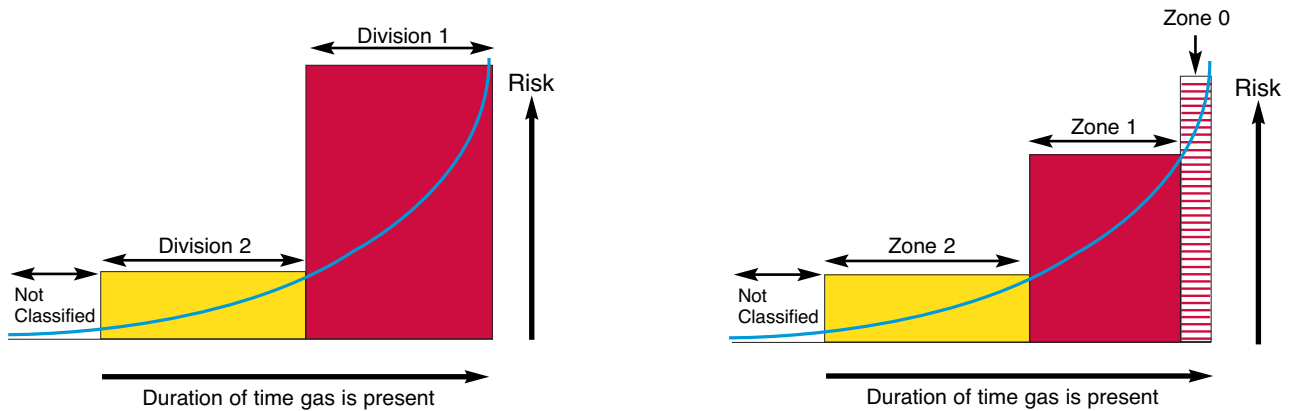

The abnormal conditions of occurrence, or lower risk areas, in the Zone and Division system are basically identical. However, in areas where a hazard is expected to occur in normal operation, the Zone system deals with highest risk areas separately, and risk associated with the remaining location is considered lower. The Division system tends to be less specific in its consideration of Division 1. The Division system treats all areas where a hazard is expected to occur in normal operation the same.

The following chart illustrates the differences between the various Zones.

Grade of Release	Zone	Flammable Mixture Present
Continuous	0	1000 hours per year or more (10%)
Primary	1	Between 10 and 1000 hours per year or more (0.1% to 10%)
Secondary	2	Less than 10 hours per year (0.01% to 0.1%)
Unclassified	-	Less than 1 hour per year (Less than 0.01%)

This is a combination of Tables 2 and 3 from API RP505

The 1-hour per year used in API RP505 is considered to be high by some industry experts. Conservative estimates of this figure should be 0.01 hours per year.

**Class I Locations, continued**

Class I locations are further divided into Groups based on the explosive properties of the materials present. North America under the Class & Div. System uses four Gas groups while the IEC/CENELEC and the U.S. and Canada under the Zone System use three.

The chart below compares the two systems.

Typical Gas	Class/Division Gas Groups	Zone Gas Groups
Acetylene	A	II C
Hydrogen	B	
Ethylene	C	II B
Propane	D	II A

(The US has added a "IIB + hydrogen" group to address certain construction limitations.)

**Class II Locations**

Class II locations are those which are hazardous due to the presence of combustible or electrically conductive dusts. The dust must be present in sufficient quantities for a fire or explosion hazard to exist. The fact that there is some combustible dust present does not mean a Class II hazardous location exists.

Class II substances are divided into three groups for similar reasons to those of Class I materials: equipment design and area classification. Class II groups are based on different characteristics than those of Class I, given the requirements for an explosion to occur and the protection methods required for equipment. In Class II locations the ignition temperature, the electrical conductivity, and the thermal blanketing effect of the dust are critical when dealing with heat-producing equipment, such as lighting fixtures and motors. It is these factors which are the deciding factors in determining the Class II groups.

Groups	Type of Material	Examples
E	Metal Dusts	Powdered Metals such as Aluminum or Magnesium
F	Carbonaceous Dusts	Carbon Black, Coal Dust or Coke Dust
G	Agricultural Dusts	Grain, Flour, Sugars, Spices and certain Polymers

(The IEC and NEC 506 have developed Zones for atmospheres containing combustible dusts, which again separates areas in to three Zones 20, 21 and 22.)

**Zone 20, 21 and 22 Locations**

The IEC/CENELEC and the U.S. introduced the three-Zone system for combustible dust locations. These have not been included in the CEC yet. The definitions are as follows:

**Zone 20** - an area in which a combustible dust, as a cloud, is present continuously or frequently during normal operations in sufficient quantities to produce an explosive mixture.

**Zone 21** - an area in which a combustible dust, as a cloud, is likely to occur during normal operations in sufficient quantities to produce an explosive mixture.

**Zone 22** - an area in which combustible dust clouds may occur infrequently and persist for only short periods of time or in which accumulations or layers may be present under abnormal conditions.

**Class III Locations**

Class III locations are those which are hazardous due to the presence of easily ignitable fibers or flyings. However, the material is not suspended in the air in quantities sufficient to produce ignitable mixtures.

Easily ignitable fibers and flyings present a serious fire risk, not normally an explosion hazard. The greater danger with Class III materials is that if a layer forms throughout a facility, an ignition will cause a flash fire which moves at near explosive speeds.

In the Zone System fibers and flyings are treated under Zone 20, 21 and 22.

## TEMPERATURE CLASSES

Ignition temperature or auto-ignition temperature (AIT) is the minimum temperature of a surface at which an explosive atmosphere ignites. Flammable vapors and gases can be classified into temperature classes according to their ignition temperature. The maximum temperature of a piece of equipment must always be lower than the ignition temperature of the gas - air mixture or vapor - air mixture in which it is placed. Equipment shall be marked to show the operating temperature or temperature class referenced to a +40°C (+104°F) ambient. The temperature class (T code) is indicated on the manufacturers nameplate and is based on the table below.

### AMBIENT TEMPERATURE

The ambient temperature is the surrounding temperature of the environment in which a piece of equipment is installed, whether it is indoors or outdoors. The standard temperature range for equipment design in the Zone system is -20°C to +40°C; and in the Class and Division System -25°C to +40°C for this ranges no ambient temperature marking is required on the product. Electrical equipment that is designed for use in a range of ambient temperature other than stated, the actual ambient temperature range shall be marked on the equipment nameplate.

The R. STAHL product lines, in most cases, exceed the above mentioned temperature requirements. Refer to the appropriate catalog pages for the product-specific “Ambient Temperature Range”. Any ranges outside of the above stated ranges are marked on the product nameplate.

North American Temperature Code	IEC/GENELEC/NEC 505 Temperature Classes	Maximum Temperature	
		°C	°F
T1	T1	450°C	842°F
T2	T2	300°C	572°F
T2A	-	280°C	536°F
T2B	-	260°C	500°F
T2C	-	230°C	446°F
T2D	-	215°C	419°F
T3	T3	200°C	392°F
T3A	-	180°C	356°F
T3B	-	165°C	329°F
T3C	-	160°C	320°F
T4	T4	135°C	275°F
T4A	-	120°C	248°F
T5	T5	100°C	212°F
T6	T6	85°C	185°F

Applications requiring product with extreme ambient temperature ranges outside those standard ranges stated under the heading “Ambient Temperature Range” are specified under the heading of “Special Ambient Temperature Range”. Only products with this additional catalog information can be customized for extreme temperature applications. Please consult factory for your special needs.


## EXPLOSIVE GAS PROTECTION METHODS

There are a number of methods of protecting electrical equipment, which prevent an explosion when used in a flammable gas atmosphere.

Three elements are required for an explosion to occur - fuel, oxygen and a heat or ignition source must be present. The fuel and oxygen must be in the correct mixture. Too little fuel, or a lean mixture, or too much fuel, a rich mixture cannot ignite. These explosive limits are defined as the “Lower Explosive Limit” (LEL) and the “Upper Explosive Limit” (UEL).

Each method of protection addresses the Fire Triangle in some manner. Either by containing an internal explosion or eliminating one or more of the components necessary for an explosion to occur.

The most common North American methods of protection are explosionproof equipment for Class I locations, and dust-ignition proof equipment for Class II locations. R. STAHL produces a wide range of equipment for use in hazardous locations using various methods of protection.

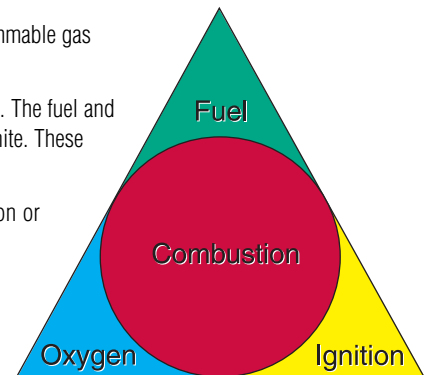

### Methods of Protection (Gas)




#### Flameproof Type of Protection “d”- or Explosionproof Equipment

Although the North American term “explosionproof” and IEC term “flameproof” are SIMILAR concepts, the requirements in the product standards are different. Explosionproof is a Div. 1 technology which can be used in a NEC or CEC defined Zone 1 environment. Flameproof is a Zone 1 technology and can not be used in a Div. 1 environment.


Since flammable gases and vapors are expected inside an enclosure, the equipment must be capable of withstanding an explosion caused by sparking contacts of devices, high temperatures, or an electrical fault. The enclosure is designed so that hot gases generated during an internal explosion are cooled below the ignition temperature of the surrounding flammable atmosphere as they escape through the joints of the unit.

In addition, the external surfaces of the enclosure must not become hot enough to ignite the surrounding atmosphere due to heat energy within the unit. This heat energy may be the result of normal operation of heat-producing equipment, or the result of an electrical arc to the enclosure from an arcing ground fault. Safety factors are applied to all testing of this type of enclosure to ensure the unit will not rupture as a result of an internal explosion.




**Encapsulation - Type of Protection “ma” for use in Zone 0 and “mb” for use in Zone 1**

Encapsulation is a type of protection in which the parts that can ignite an explosive atmosphere are enclosed in a resin. The resin must be sufficiently resistant to environmental influences so that the explosive atmosphere cannot be ignited by either sparking or heating, which may occur within the device. This is typically used with electronic devices.




**Increased Safety - Type of Protection “e” or “eb” for use in Zone 1**

Type of protection applied to electrical equipment that does not produce arcs or sparks in normal service and under specified abnormal conditions, in which additional measures are applied so as to give increased safety against the possibility of excessively high temperatures and of the occurrence of arcs and sparks.




**Intrinsic Safety - Types of Protection “i”, “ia”, “ib” and “ic”**

North America now identifies four versions of this protection method. Types “i” (NEC 504) and “ia” (NEC 505) are identical since type “i” is based on the IEC 60 079-11 Standard. In Zone 0 the only acceptable type of equipment are types “i” and “ia”. Type “ib” is acceptable in Zone 1 and “ic” is acceptable in Zone 2  
(For further details refer to R. STAHL INC’s Catalog for Hazardous Location Automation Products.)



**Oil Immersion - Type of Protection “o” or “ob” for use in Zone 1**

Type of protection where electrical equipment is immersed in a protective liquid in such a way that an explosive atmosphere that may be above the liquid or outside the enclosure cannot be ignited.



**Pressurization - Types of Protection “px” or “pxb” for use in Zone 1, “py” or “pyb” for use in Zone 1 and “pz” or “pzc” for use in Zone 2**


This type of protection prevents the surrounding atmosphere from entering an enclosure by maintaining a positive pressure within the unit. Clean air or inert gas is used to maintain a higher pressure than the surrounding atmosphere. In pressurization, the electrical equipment is interlocked with a system which cycles clean air within the unit to remove explosive gases before start up.



**Purged and Pressurized -**

For the Class and Division System the following table applies

Type	Explanation
X	Changes the area within the unit from Class I, Division 1 to unclassified
Y	Changes the area within the unit from Class I, Division 1 to Class I, Division 2
Z	Changes the area within the unit from Class I, Division 2 to unclassified



**Powder Filling - Type of Protection “q” or “qb” for use in Zone 1**

Type of protection where electrical parts capable of igniting an explosive atmosphere are fixed in position and completely surrounded by filling material (glass or quartz powder) to prevent the ignition of an external explosive atmosphere.



**Nonsparking Equipment - Type of Protection “nA” or “nAc” for Use in Zone 2**

**Sparking Equipment - Type of Protection “nC” or “nCc” for Use in Zone 2**

Equipment in which the contacts are suitably protected other than by restricted breathing enclosure.

**Hermetically Sealed for use in Class I, Division 2 or Zone 2**

A common type of hermetically sealed equipment is a contact block or reed switch. In this method, the arcing components of the switch are encased in a glass tube. The connecting wires are fused to the glass sealing the unit to prevent any ingress of flammable gases.

**Restricted Breathing Enclosure - Type of Protection “nR” or “nRc” for Use in Zone 2**

## **Combustible Dust Protection Methods**

### **CLASS II EQUIPMENT**

Dusttight equipment is designed to exclude dust from entering the enclosure, to prevent hot particles, arcs, sparks or heat generated inside of the enclosure from igniting an exterior accumulation or atmospheric suspension of dusts on or in the vicinity of the enclosure. Nonmetallic enclosures must also prevent the accumulation of static charges on the enclosure itself.

The primary function of the joints of these enclosures is to seal dust out and keep the hot particles etc. inside, therefore, typically the joints are gasketed.

Since this protection method keeps the combustible dusts outside, the enclosure is not expected or designed to contain an internal explosion. The design must be sufficient though to withstand mechanical abuse.


The ignition temperature of dusts is usually lower than that of gases and vapors, and therefore the control of external surface temperatures is more rigorous for Class II equipment than for Class I equipment. Dust layers on the equipment can act as insulation for the heat generated inside the equipment, which in turn can increase the surface temperature of the unit even under normal operating conditions.

The NEC defines "Dust-ignition proof" as the protection for Class II, Division 1 and 2 locations for which it is approved, and "Dusttight" as a type of enclosure that is constructed so that dusts will not enter the enclosing case under specific test conditions. In the NEC, some applications for Class II, Division 1 require Dust-ignition proof enclosures.

The NEC, in Article 506 introduced the Zone Classification System, Zones 20, 21 and Zone 22 for Combustible Dust or Ignitable Fibers and Flyings, as an alternative to the Class and Division Classification System covered in Articles 500, 502 and 503.

The Zone Classification System is based on the modified IEC Area Classification System as defined in ANSI/ISA 61241-10.

## **Methods of Protection (Dust)**




***Intrinsic Safety - Type of Protection iaD for Zone 20, 21 and 22***

***Intrinsic Safety - Type of Protection ibD for Zone 21 and 22***


***Associated Apparatus - Type of Protection [iaD] - Unclassified***

***Associated Apparatus - Type of Protection [ibD] - Unclassified***




***Encapsulation - Type of Protection maD for Zone 20, 21 and 22***

***Encapsulation - Type of Protection mbD for Zone 21 and 22***



***Pressurization - Type of Protection pD for Zone 21 and 22***



***Enclosure - Type of Protection tD for Zone 21 and 22***

**Environmental Protection****NEMA and CSA Type Enclosure**

**NEMA or CSA Type 1 Enclosures** are intended for indoor use primarily to provide a degree of protection against limited amounts of falling dirt. This type is not specifically identified in the CSA Standard.

**NEMA or CSA Type 2 Enclosures** are intended for indoor use primarily to provide a degree of protection against limited amounts of falling water and dirt.

**NEMA or CSA Type 3 Enclosures** are intended for outdoor use primarily to provide a degree of protection against rain, sleet, windblown dust; and damage from external ice formation.

**NEMA or CSA Type 3R Enclosures** are intended for outdoor use primarily to provide a degree of protection against rain, sleet; and damage from external ice formation, and must have a drain hole.

**NEMA or CSA Type 3S Enclosures** are intended for outdoor use primarily to provide a degree of protection against rain, sleet, windblown dust; and to provide for operation of external mechanisms when ice laden.

**NEMA or CSA Type 4 Enclosures** are intended for indoor or outdoor use primarily to provide a degree of protection against windblown dust and rain, splashing water, hose directed water; and damage from external ice formation.

**NEMA or CSA Type 4X Enclosures** are intended for indoor or outdoor use primarily to provide a degree of protection against corrosion, windblown dust and rain, splashing water, hose directed water; and damage from external ice formation.

**NEMA or CSA Type 5 Enclosures** are intended for indoor use primary to provide a degree of protection against settling airborne dust, falling dirt, and dripping non-corrosive liquids.

**NEMA or CSA Type 6 Enclosures** are intended for indoor or outdoor use primarily to provide a degree of protection against hose-directed water, the entry of water during occasional temporary submersion at a limited depth; and damage from external ice formation.

**NEMA or CSA Type 6P Enclosures** are intended for indoor or outdoor use primarily to provide a degree of protection against hose-directed water, the entry of water during prolonged submersion at a limited depth; and damage from external ice formation.

**NEMA or CSA Type 12 Enclosures** are intended for indoor use primarily to provide a degree of protection against circulating dust, falling dirt, and dripping non-corrosive liquids.

**NEMA or CSA Type 12K Enclosures** with knockouts are intended for indoor use primarily to provide a degree of protection against circulating dust, falling dirt, and dripping non-corrosive liquids.

**NEMA or CSA Type 13 Enclosures** are intended for indoor use primarily to provide a degree of protection against dust, spraying of water, oil, and non-corrosive coolant.

**Definitions Referring To NEMA Requirements for Hazardous Location**

The following NEMA type enclosures occasionally appear on specifications and product literature

**NEMA 7** Enclosures are intended for indoor use in locations classified as Class I, Groups A, B, C, or D, as defined in the NEC.

**NEMA 8** Enclosures are for indoor or outdoor use in locations classified as Class I, Groups A, B, C, or D, as defined in the NEC.

**NEMA 9** Enclosures are intended for indoor use in locations classified as Class II, Groups E, F, and G, as defined in the NEC.

**NEMA 10** Enclosures are constructed to meet the applicable requirements of the Mine Safety and Health Administration. (MSHA)

The designations are considered to be historical terminology approaching obsolescence and are incomplete designations at best. Types 7 and 9 are not mentioned anywhere in the National Electrical Code, the controlling document for installations. All hazardous location products must be marked with the Class, Division, Group, and Temperature Class to provide to an installer all of the information needed to complete an installation in accordance with Article 500 of the National Electrical Code.

## Comparison of Specific Applications of Enclosures for Indoor Unclassified Locations

Provides A Degree Of Protection Against The Following Environmental Conditions	Type of Enclosure									
	1*	2*	4	4x	5	6	6P	12	12K	13
Incidental contact with the enclosed equipment	X	X	X	X	X	X	X	X	X	X
Falling dirt	X	X	X	X	X	X	X	X	X	X
Falling liquids and light splashing	-	X	X	X	X	X	X	X	X	X
Circulation dust, lint, fibers, and flyings**	-	-	X	X	-	X	X	X	X	X
Settling airborne dust, lint, fibers, and flyings**	-	-	X	X	X	X	X	X	X	X
Hosedown and splashing water	-	-	X	X	-	X	X	-	-	-
Oil and coolant seepage	-	-	-	-	-	-	-	X	X	X
Oil and coolant spraying and splashing	-	-	-	-	-	-	-	-	-	X
Corrosive agents	-	-	-	X	-	-	-	-	-	-
Occasional temporary submersion	-	-	-	-	-	X	X	-	-	-
Occasional prolonged submersion	-	-	-	-	-	-	-	-	-	-

\* These enclosures may be ventilated. However, Type 1 may not provide protection against small particles of falling dirt when ventilation is provided in the enclosure top.

\*\* These fibers and flyings are not explosive materials and are not considered as Class III type ignitable fibers or combustible flyings. For Class III type ignitable fibers or combustible flyings see the National Electrical Code®, Article 500.

## Comparison of Specific Applications of Enclosures for Outdoor Unclassified Locations

Provides A Degree Of Protection Against The Following Environmental Conditions	Type of Enclosure						
	3*	3R***	3S	4	4X	6	6P
Incidental contact with the enclosed equipment	X	X	X	X	X	X	X
Rain, snow, sleet*	X	X	X	X	X	X	X
Sleet**	-	-	X	-	-	-	-
Windblown dust	X	-	X	X	X	X	-
Hosedown	-	-	-	X	X	X	-
Corrosive agents	-	-	-	-	X	-	-
Occasional temporary submersion	-	-	-	-	-	X	-
Occasional prolonged submersion	-	-	-	-	-	-	X

\* External operating mechanisms are not required to operate when the enclosure is ice covered.

\*\* External operating mechanisms are operable when the enclosure is ice covered.

\*\*\*These enclosures may be ventilated.

## Comparison of Specific Applications of Enclosures for Indoor Hazardous (Classified) Locations

Provides a Degree of Protection Against Atmospheres Typically Containing Hazardous Gases, Vapors, and Dusts***	Type of Enclosure: NEMA 7 & 8, Class I Groups**					NEMA 9 & 10, Class II Groups**			
	Class	A	B	C	D	E	F	G	10
Acetylene	I	X	-	-	-	-	-	-	-
Hydrogen, manufactured gases	I	-	X	-	-	-	-	-	-
Diethyl ether, ethylene, cyclopropane	I	-	-	X	-	-	-	-	-
Gasoline, hexane, butane, naphtha, propane, acetone	I	-	-	-	X	-	-	-	-
Toluene, isoprene	I	-	-	-	X	-	-	-	-
Metal dusts	II	-	-	-	-	X	-	-	-
Carbon black, coal dust, coke dust	II	-	-	-	-	-	X	-	-
Flour, starch, grain dust	II	-	-	-	-	-	-	X	-
Fibers, flyings	III	-	-	-	-	-	-	-	-
Methane with or without coal dust	MSHA	-	-	-	-	-	-	-	X

















\* Due to the characteristics of the gas, vapor, or dust, a product suitable for one Class or Group may not be suitable for any other Class or Group unless so marked on the product.

\*\* For Class III type ignitable fibers or combustible flyings refer to the National Electrical Code® Article 500.

\*\*\*For a complete listing of flammable liquids, gases, or vapors refer to NFPA 497 - 1997 (Recommended Practice for the Classification of Flammable Liquids, Gases, or Vapors and of Hazardous (Classified) Locations for Electrical installations in Chemical Process Areas and NFPA 325 - 1994 (Fire Hazard Properties of Flammable Liquids, Gases, and Volatile Solids). Reference also NFPA 499 - 1997 Classifications of Combustible Dusts and of Hazardous (Classified) Locations for Electrical installations in Chemical Process Areas.

## Ingress Protection (IP)

The IEC uses the term "Ingress Protection" to identify the environmental protection of a device. This is defined in IEC Standard 60 529 and the following chart illustrates the two-digit code used.

<b>IP</b> The IP classification system designates, by means of a number, the degree of protection provided by a device against ingress of dust and water.		<b>SECOND NUMBER</b> Degree of protection against water	
		<u>0</u> 	Non-protected.
<b>FIRST NUMBER</b> Degree of protection against solid objects		<u>1</u> 	Protected against water dripping vertically, such as condensation.
<u>0</u> 	Non-protected.	<u>2</u> 	Protected against dripping water when tilted up to 15°.
<u>1</u> 	Protected against a solid object greater than 50mm such as a hand.	<u>3</u> 	Protected against water spraying at an angle of up to 60°.
<u>2</u> 	Protected against a solid object greater than 12mm, such as a finger.	<u>4</u> 	Protected against water splashing from any direction.
<u>3</u> 	Protected against a solid object greater than 2.5mm, such as wire or a tool.	<u>5</u> 	Protected against jets of water from any direction.
<u>4</u> 	Protected against a solid object greater than 1.0 mm, such as wire or thin strips.	<u>6</u> 	Protection against heavy seas or powerful jets of water.
<u>5</u> 	Dust-protected. Prevents ingress of dust sufficient to cause harm.	<u>7</u> 	Protected against harmful ingress of water when immersed between a depth of 150mm to 1 meter.
<u>6</u> 	Dust tight. No dust ingress.	<u>8</u> 	Protected against submersion. Suitable for continuous immersion in water.

## EQUIPMENT CERTIFICATION

Equipment for use in hazardous locations must be certified to an appropriate National Standard and marked as such by an accredited third party testing organization. Follow-up inspection to ensure conformance is part of the program. Products may carry multiple markings for multiple countries. The following is a brief description of the National Requirements.

### Important Listing Information

The specific requirements for product certification vary from country to country. While UL, FM and CSA are similar in their approach, subtle differences still exist.


North American certifications permit conduit or cable entries to be field installed provided appropriate bonding and grounding requirements are followed.

## Marking

### Typical North American Marking to NEC 500

Class I, Divisions 1 or 2, Groups A, B, C & D, T4 (T-Code)  
 Class II, Divisions 1 or 2, Groups E, F & G, T4 (T-Code)  
 Class III,  
 Enclosure Type 3, 4, 4X

### Typical U.S. Marking to NEC 505

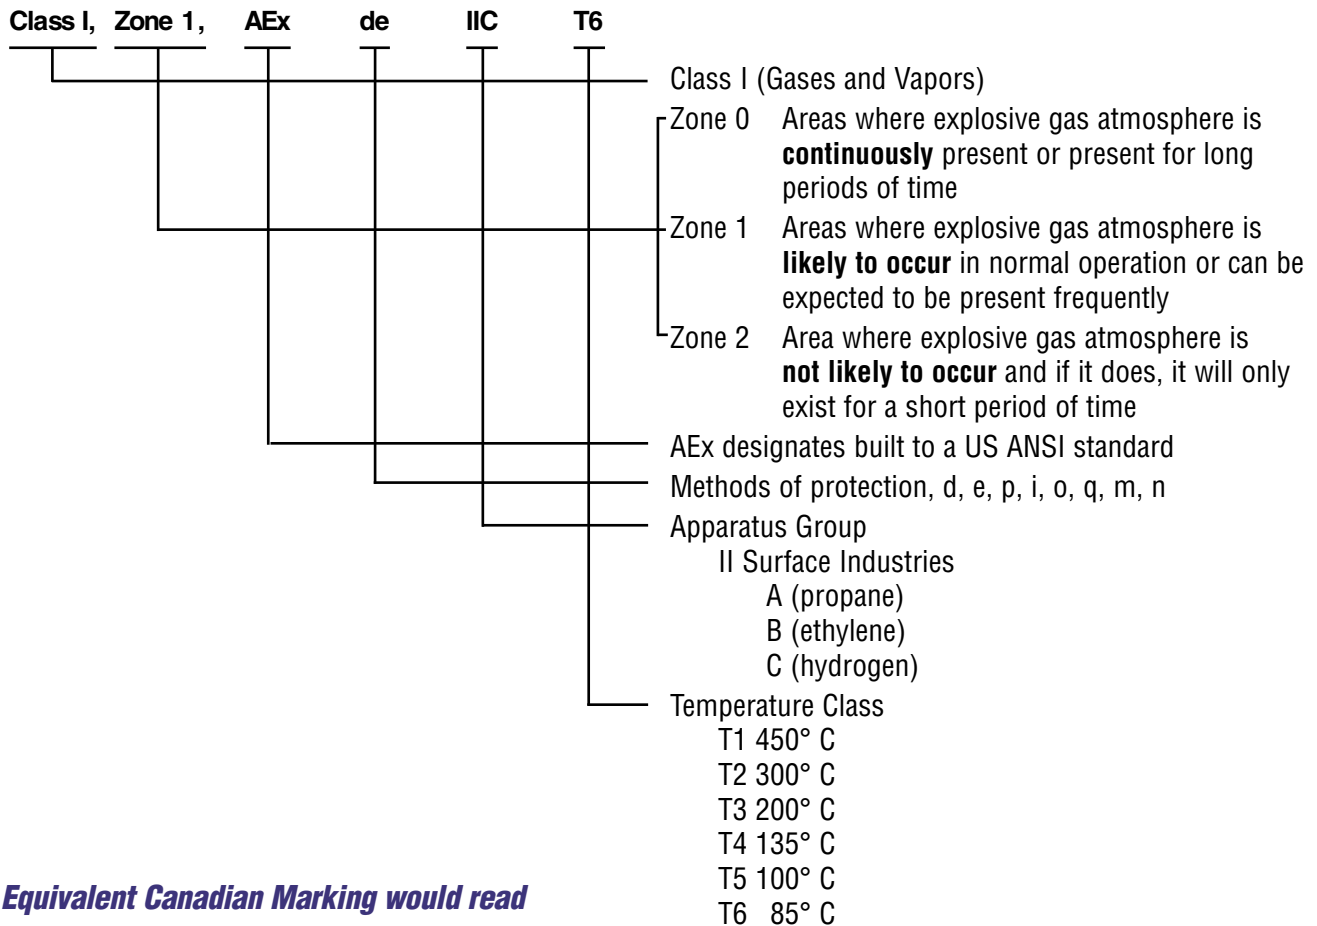


### Equivalent Canadian Marking would read


**Ex de IIC T6**

**Typical U.S. Marking to NEC 506**


(Dust Zones not adopted by Canada yet)

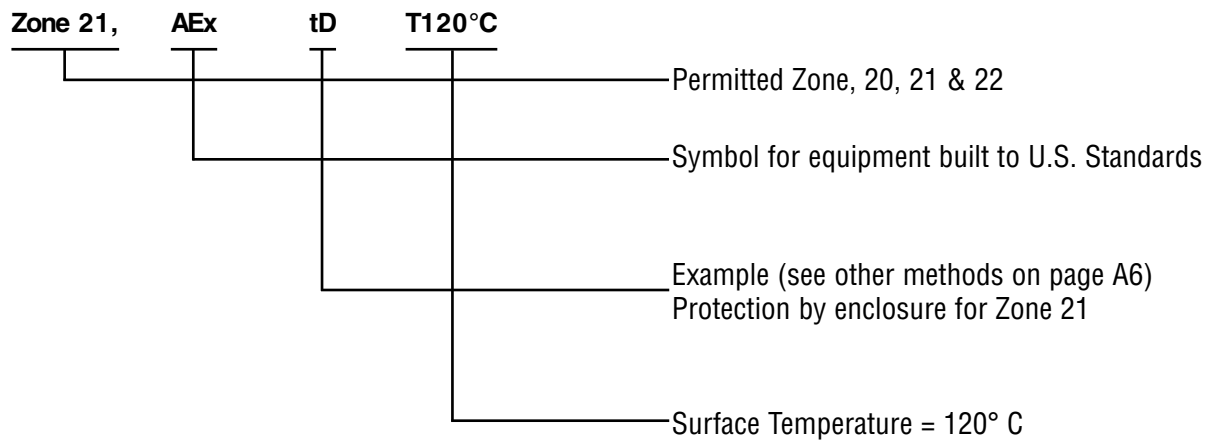

**Typical European ATEX/GENELEC Marking for Dust Explosion Protection**

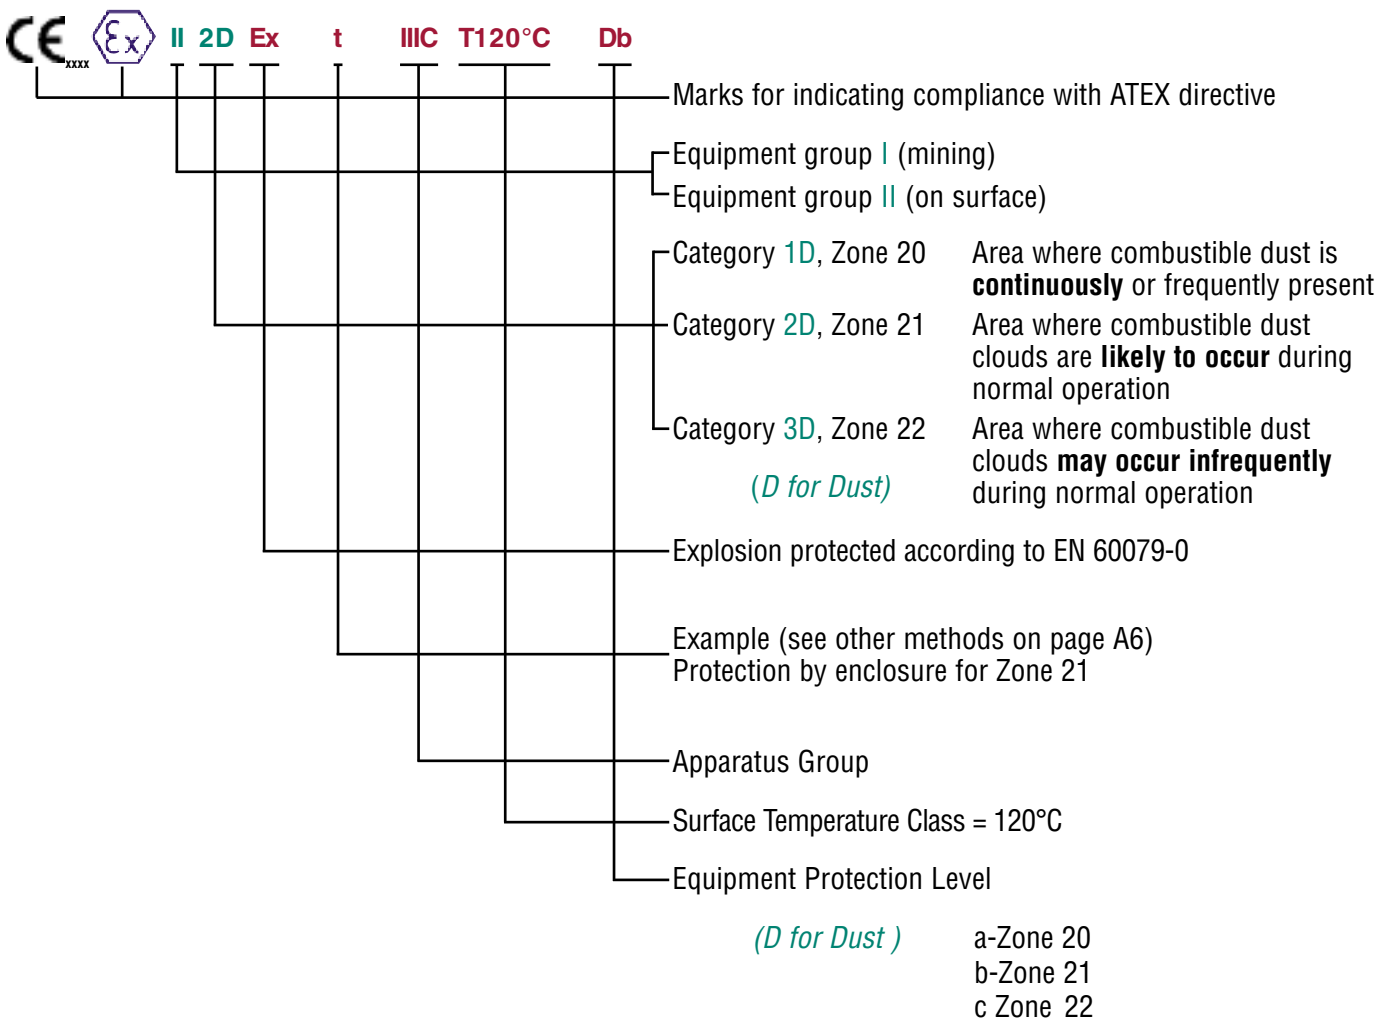

## Typical European ATEX/GENELEC Marking for Gas Explosion Protection

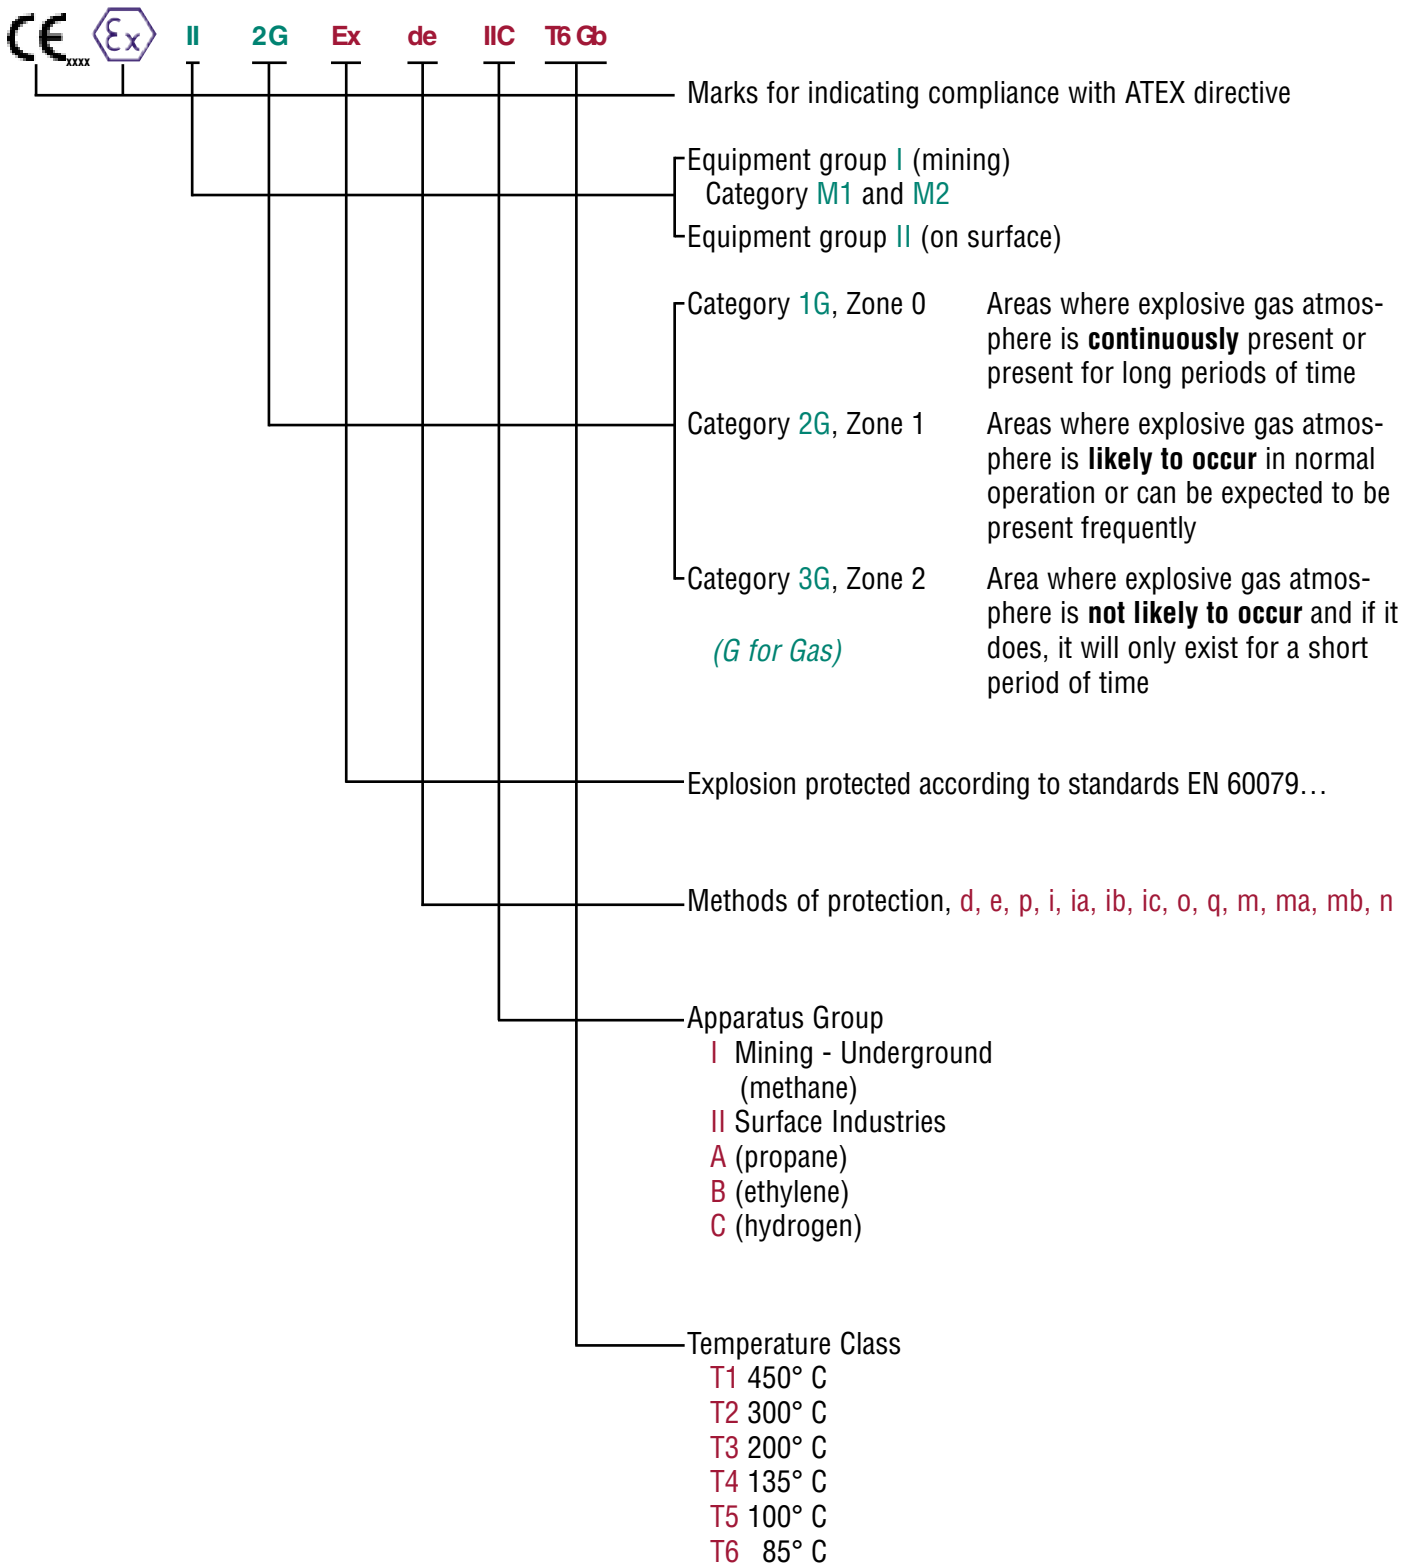

**ATEX DIRECTIVE**

The ATEX Directive 94/9/EC is a directive adopted by the European Union (EU) to facilitate free trade in the EU by aligning the technical and legal requirements in the Member States for products intended for use in potentially explosive atmospheres.

This Directive applies to electrical and non-electrical equipment/components and protective systems. The ATEX Directive became mandatory on July 1, 2003.

Equipment located outside potentially explosive atmospheres are also covered by the ATEX Directive under the following conditions:

- The equipment is a safety device, controller or regulatory device; and
- The equipment is required for the safe function of equipment or protective systems with respect to the risk of explosion.

All equipment under its scope is required to bear the European CE Marking as verification of compliance with the Directive (the CE Marking will not appear on components defined by this Directive). The ATEX Directive specifically defines procedures for the evaluation of a product's design and production based on Equipment Groups and Categories. This is briefly outlined below.

**Equipment Group I Overview**

Equipment intended for use in underground parts of mines, and to those parts of surface installations of such mines, liable to be endangered by firedamp and/or combustible dust.

Equipment Category	Protection	Comparison To Current IEC Classification
M1	2 levels of protection; or 2 independent faults	Group I
M2	1 level of protection based on normal operation	Group I

**Equipment Group II Overview**

Equipment intended for use in other than Equipment Group I places that are liable to be endangered by explosive atmospheres.

Equipment Category	Protection	Comparison To Current IEC Classification
1G 1D	2 levels of protection; or 2 independent faults	Group II, Zone 0 (gas) Zone 20 (dust)
2G 2D	1 level of protection based on frequent disturbances; or equipment faults	Group II, Zone 1 (gas) Zone 21 (dust)
3G 3D	1 level of protection based on normal operation	Group II, Zone 2 (gas) Zone 22 (dust)

## ATEX Marking

The equipment for ATEX identifies the category which indicates a risk of the equipment becoming a source of ignition. The table at right shows the relationship between Categories and Zones. Note that the Zone represents only the risk of a release of flammables into the area.

NOTE: As an alternative to the relationship given in the table at right between Categories and Zones, the required Category of equipment may be selected on the basis of risk, i.e. taking into account the consequences of an ignition. This may, under circumstances, require a higher Category or permit a lower Category than defined in the table.

Zone	Categories
0	1G
1	2G
2	3G
20	1D
21	2D
22	3D

## Differences Between the Old and New Directives

The main differences are:

- The inclusion of non-electrical equipment
- The inclusion of dust atmospheres
- Requirements for safety related devices (flame arrestors, suppression systems etc) and safe area equipment
- Additional quality system requirements
- The need to produce a 'Technical File'

## Products Covered

The Directive includes equipment and safety or control devices installed outside the potentially explosive area but having an explosion protection function. A wide range of products comes within the definition of equipment, including electric motors, compressors, diesel engines, lighting fittings, control and communication devices and monitoring and detection equipment, to name but a few. "Protective Systems" are also included, and include items that prevent an explosion that has been initiated from spreading or causing damage. They include flame arrestors, quenching systems, pressure relief panels and fast-acting shut-off valves to name but a few.

## Product Exclusions

The Directive, however, does exclude the following product types:

- Medical devices
- Products for use in the presence of explosives
- Products for domestic use
- Means of transport by air or on road or rail or water networks.
- Sea-going vessels and mobile offshore units
- Military equipment
- Personal protective equipment covered by directive 89/686/EEC

Vehicles intended for use in an explosive atmospheres are not excluded.

For more info about ATEX, visit [http://ec.europa.eu/enterprise/ATEX/index\\_en.htm](http://ec.europa.eu/enterprise/ATEX/index_en.htm)

## CE MARKING

The CE mark is a mandatory European marking for certain product groups to indicate conformity with the essential health and safety requirements set out in European Directives. The letters 'CE' are an abbreviation of Conformité Européenne, French for European conformity. The CE mark must be affixed to a product if it falls under the scope of the so called 'New Approach' Directives. Without the CE marking, and thus without complying with the provisions of the Directives, the product may not be placed in the market or put into service in the fifteen member states of the European Union and Norway, Iceland and Liechtenstein. However, if the product meets the provisions of the applicable European Directives, and the CE mark is affixed to a product, these countries may not prohibit, restrict or impede the placing in the market or putting into service of the product. Thus, CE marking can be regarded as the products trade passport for Europe. For more info about CE marking, visit [www.eurunion.org/legislat/standard/standard.htm](http://www.eurunion.org/legislat/standard/standard.htm)



## SCHEME

The objective of the IECEx Scheme is to facilitate global trade in electrical equipment intended for use in explosive atmospheres by eliminating the need for multiple national certification.

The IECEx Scheme provides the means for manufacturers of Ex equipment to obtain certificates of conformity that will be accepted at national level in all participating countries. A certificate of conformity may be obtained from any certification body accepted into the Scheme. The certificate will attest that the equipment design conforms to the relevant IEC Standards. The final objective of the IECEx Scheme is world-wide acceptance of one standard, one certificate and one mark.

For the IECEx Scheme to achieve its long term objective, every national Standard for which application is made by participating countries will need to be identical to the corresponding IEC Standard. For countries whose national Standards are not yet identical to the IEC Standards, a transitional period will be necessary to allow time for participating IECEx Scheme member countries to adjust their national standards to the IEC standards and work toward national acceptance of IECEx Certificates of conformity and the IECEx mark.

For more info about IECEx Scheme, visit [www.IECEx.com](http://www.IECEx.com)

## USEFUL TABLES

**Temperature Conversion Table**  
**Degree Celsius vs. Degree Fahrenheit**

The equation for converting Fahrenheit to Celsius is:  $(\text{Deg. F} - 32) \times (5/9) = \text{Deg. C}$

°C	← °F →	°C	°F
-59.4	<b>-75</b>	-103.0	
-58.9	<b>-74</b>	-101.2	
-58.3	<b>-73</b>	-99.4	
-57.8	<b>-72</b>	-97.6	
-57.2	<b>-71</b>	-95.8	
-56.7	<b>-70</b>	-94.0	
-56.1	<b>-69</b>	-92.2	
-55.6	<b>-68</b>	-90.4	
-55.0	<b>-67</b>	-88.6	
-54.4	<b>-66</b>	-86.8	
-53.9	<b>-65</b>	-85.0	
-53.3	<b>-64</b>	-83.2	
-52.8	<b>-63</b>	-81.4	
-52.2	<b>-62</b>	-79.6	
-51.7	<b>-61</b>	-77.8	
-51.1	<b>-60</b>	-76.0	
-50.6	<b>-59</b>	-74.2	
-50.0	<b>-58</b>	-72.4	
-49.4	<b>-57</b>	-70.6	
-48.9	<b>-56</b>	-68.8	
-48.3	<b>-55</b>	-67.0	
-47.8	<b>-54</b>	-65.2	
-47.2	<b>-53</b>	-63.4	
-46.7	<b>-52</b>	-61.6	
-46.1	<b>-51</b>	-59.8	
-45.6	<b>-50</b>	-58.0	
-45.0	<b>-49</b>	-56.2	
-44.4	<b>-48</b>	-54.4	
-43.9	<b>-47</b>	-52.6	
-43.3	<b>-46</b>	-50.8	
-42.8	<b>-45</b>	-49.0	
-42.2	<b>-44</b>	-47.2	
-41.7	<b>-43</b>	-45.4	
-41.1	<b>-42</b>	-43.6	
-40.6	<b>-41</b>	-41.8	
-40.0	<b>-40</b>	-40.0	
-39.4	<b>-39</b>	-38.2	
-38.9	<b>-38</b>	-36.4	
-38.3	<b>-37</b>	-34.6	
-37.8	<b>-36</b>	-32.8	
-37.2	<b>-35</b>	-31.0	
-36.7	<b>-34</b>	-29.2	
-36.1	<b>-33</b>	-27.4	
-35.6	<b>-32</b>	-25.6	
-35.0	<b>-31</b>	-23.8	
-34.4	<b>-30</b>	-22.0	
-33.9	<b>-29</b>	-20.2	
-33.3	<b>-28</b>	-18.4	
-32.8	<b>-27</b>	-16.6	
-32.2	<b>-26</b>	-14.8	
-31.7	<b>-25</b>	-13.0	
-31.1	<b>-24</b>	-11.2	
-30.6	<b>-23</b>	-9.4	
-30.0	<b>-22</b>	-7.6	
-29.4	<b>-21</b>	-5.8	
-28.9	<b>-20</b>	-4.0	
-28.3	<b>-19</b>	-2.2	
-27.8	<b>-18</b>	-0.4	
-27.2	<b>-17</b>	1.4	
-26.7	<b>-16</b>	3.2	

°C	← °F →	°C	°F
-26.1	<b>-15</b>	5.0	
-25.6	<b>-14</b>	6.8	
-25.0	<b>-13</b>	8.6	
-24.4	<b>-12</b>	10.4	
-23.9	<b>-11</b>	12.2	
-23.3	<b>-10</b>	14.0	
-22.8	<b>-9</b>	15.8	
-22.2	<b>-8</b>	17.6	
-21.7	<b>-7</b>	19.4	
-21.1	<b>-6</b>	21.2	
-20.6	<b>-5</b>	23.0	
-20.0	<b>-4</b>	24.8	
-19.4	<b>-3</b>	26.6	
-18.9	<b>-2</b>	28.4	
-18.3	<b>-1</b>	30.2	
-17.8	<b>0</b>	32.0	
-17.2	<b>1</b>	33.8	
-16.7	<b>2</b>	35.6	
-16.1	<b>3</b>	37.4	
-15.6	<b>4</b>	39.2	
-15.0	<b>5</b>	41.0	
-14.4	<b>6</b>	42.8	
-13.9	<b>7</b>	44.6	
-13.3	<b>8</b>	46.4	
-12.8	<b>9</b>	48.2	
-12.2	<b>10</b>	50.0	
-11.7	<b>11</b>	51.8	
-11.1	<b>12</b>	53.6	
-10.6	<b>13</b>	55.4	
-10.0	<b>14</b>	57.2	
-9.4	<b>15</b>	59.0	
-8.9	<b>16</b>	60.8	
-8.3	<b>17</b>	62.6	
-7.8	<b>18</b>	64.4	
-7.2	<b>19</b>	66.2	
-6.7	<b>20</b>	68.0	
-6.1	<b>21</b>	69.8	
-5.6	<b>22</b>	71.6	
-5.0	<b>23</b>	73.4	
-4.4	<b>24</b>	75.2	
-3.9	<b>25</b>	77.0	
-3.3	<b>26</b>	78.8	
-2.8	<b>27</b>	80.6	
-2.2	<b>28</b>	82.4	
-1.7	<b>29</b>	84.2	
-1.1	<b>30</b>	86.0	
-0.6	<b>31</b>	87.8	
-0.0	<b>32</b>	89.6	
0.6	<b>33</b>	91.4	
1.1	<b>34</b>	93.2	
1.7	<b>35</b>	95.0	
2.2	<b>36</b>	96.8	
2.8	<b>37</b>	98.6	
3.3	<b>38</b>	100.4	
3.9	<b>39</b>	102.2	
4.4	<b>40</b>	104.0	
5.0	<b>41</b>	105.8	
5.6	<b>42</b>	107.6	
6.1	<b>43</b>	109.4	
6.7	<b>44</b>	111.2	

°C	← °F →	°C	°F
7.2	<b>45</b>	113.0	
7.8	<b>46</b>	114.8	
8.3	<b>47</b>	116.6	
8.9	<b>48</b>	118.4	
9.4	<b>49</b>	120.2	
10.0	<b>50</b>	122.0	
10.6	<b>51</b>	123.8	
11.1	<b>52</b>	125.6	
11.7	<b>53</b>	127.4	
12.2	<b>54</b>	129.2	
12.8	<b>55</b>	131.0	
13.3	<b>56</b>	132.8	
13.9	<b>57</b>	134.6	
14.4	<b>58</b>	136.4	
15.0	<b>59</b>	138.2	
15.6	<b>60</b>	140.0	
16.1	<b>61</b>	141.8	
16.7	<b>62</b>	143.6	
17.2	<b>63</b>	145.4	
17.8	<b>64</b>	147.2	
18.3	<b>65</b>	149.0	
18.9	<b>66</b>	150.8	
19.4	<b>67</b>	152.6	
20.0	<b>68</b>	154.4	
20.6	<b>69</b>	156.2	
21.1	<b>70</b>	158.0	
21.7	<b>71</b>	159.8	
22.2	<b>72</b>	161.6	
22.8	<b>73</b>	163.4	
23.3	<b>74</b>	165.2	
23.9	<b>75</b>	167.0	
24.4	<b>76</b>	168.8	
25.0	<b>77</b>	170.6	
25.6	<b>78</b>	172.4	
26.1	<b>79</b>	174.2	
26.7	<b>80</b>	176.0	
27.2	<b>81</b>	177.8	
27.8	<b>82</b>	179.6	
28.3	<b>83</b>	181.4	
28.9	<b>84</b>	183.2	
29.4	<b>85</b>	185.0	
30.0	<b>86</b>	186.8	
30.6	<b>87</b>	188.6	
31.1	<b>88</b>	190.4	
31.7	<b>89</b>	192.2	
32.2	<b>90</b>	194.0	
32.8	<b>91</b>	195.8	
33.3	<b>92</b>	197.6	
33.9	<b>93</b>	199.4	
34.4	<b>94</b>	201.2	
35.0	<b>95</b>	203.0	
35.6	<b>96</b>	204.8	
36.1	<b>97</b>	206.6	
36.7	<b>98</b>	208.4	
37.2	<b>99</b>	210.2	
37.8	<b>100</b>	212.0	
38.3	<b>101</b>	213.8	
38.9	<b>102</b>	215.6	
39.4	<b>103</b>	217.4	
40.0	<b>104</b>	219.2	

## USEFUL TABLES

### Temperature Conversion Table, continued Degree Celsius vs. Degree Fahrenheit

The equation for converting Fahrenheit to Celsius is:  $(\text{Deg. F} - 32) \times (5/9) = \text{Deg. C}$

°C	← °F →	°C	°F
40.6	<b>105</b>		221.0
41.1	<b>106</b>		222.8
41.7	<b>107</b>		224.6
42.2	<b>108</b>		226.4
42.8	<b>109</b>		228.2
43.3	<b>110</b>		230.0
43.9	<b>111</b>		231.8
44.4	<b>112</b>		233.6
45.0	<b>113</b>		235.4
45.6	<b>114</b>		237.2
46.1	<b>115</b>		239.0
46.6	<b>116</b>		240.8
47.2	<b>117</b>		242.6
47.8	<b>118</b>		244.4
48.3	<b>119</b>		246.2
48.9	<b>120</b>		248.0
49.4	<b>121</b>		249.8
50.0	<b>122</b>		251.6
50.6	<b>123</b>		253.4
51.1	<b>124</b>		255.2
51.7	<b>125</b>		257.0
52.2	<b>126</b>		258.8
52.8	<b>127</b>		260.6
53.3	<b>128</b>		262.4
53.9	<b>129</b>		264.2
54.4	<b>130</b>		266.0
55.0	<b>131</b>		267.8
55.6	<b>132</b>		269.6
56.1	<b>133</b>		271.4
56.7	<b>134</b>		273.2
57.2	<b>135</b>		275.0
57.8	<b>136</b>		276.8
58.3	<b>137</b>		278.6
58.9	<b>138</b>		280.4
59.4	<b>139</b>		282.2
60.0	<b>140</b>		284.0
60.6	<b>141</b>		285.8
61.1	<b>142</b>		287.6
61.7	<b>143</b>		289.4
62.2	<b>144</b>		291.2
62.8	<b>145</b>		293.0
63.3	<b>146</b>		294.8
63.9	<b>147</b>		296.6
64.4	<b>148</b>		298.4
65.0	<b>149</b>		300.2
65.6	<b>150</b>		302.0
66.1	<b>151</b>		303.8
66.7	<b>152</b>		305.6
67.2	<b>153</b>		307.4
67.8	<b>154</b>		309.2
68.3	<b>155</b>		311.0
68.9	<b>156</b>		312.8
69.4	<b>157</b>		314.6
70.0	<b>158</b>		316.4
70.6	<b>159</b>		318.2
71.1	<b>160</b>		320.0
71.7	<b>161</b>		321.8
72.2	<b>162</b>		323.6
72.8	<b>163</b>		325.4
73.3	<b>164</b>		327.2

°C	← °F →	°C	°F
73.9	<b>165</b>		329.0
74.4	<b>166</b>		330.8
75.0	<b>167</b>		332.6
75.6	<b>168</b>		334.4
76.1	<b>169</b>		336.2
76.7	<b>170</b>		338.0
77.2	<b>171</b>		339.8
77.8	<b>172</b>		341.6
78.3	<b>173</b>		343.4
78.9	<b>174</b>		345.2
79.4	<b>175</b>		347.0
80.0	<b>176</b>		348.8
80.6	<b>177</b>		350.6
81.1	<b>178</b>		352.4
81.7	<b>179</b>		354.2
82.2	<b>180</b>		356.0
82.8	<b>181</b>		357.8
83.3	<b>182</b>		359.6
83.9	<b>183</b>		361.4
84.4	<b>184</b>		363.2
85.0	<b>185</b>		365.0
85.6	<b>186</b>		366.8
86.1	<b>187</b>		368.6
86.7	<b>188</b>		370.4
87.2	<b>189</b>		372.2
87.8	<b>190</b>		374.0
88.3	<b>191</b>		375.8
88.9	<b>192</b>		377.6
89.4	<b>193</b>		379.4
90.0	<b>194</b>		381.2
90.6	<b>195</b>		383.0
91.1	<b>196</b>		384.8
91.7	<b>197</b>		386.6
92.2	<b>198</b>		388.4
92.8	<b>199</b>		390.2
93.3	<b>200</b>		392.0
93.9	<b>201</b>		393.8
94.4	<b>202</b>		395.6
95.0	<b>203</b>		397.4
95.6	<b>204</b>		399.2
96.1	<b>205</b>		401.0
96.7	<b>206</b>		402.8
97.2	<b>207</b>		404.6
97.8	<b>208</b>		406.4
98.3	<b>209</b>		408.2
98.9	<b>210</b>		410.0
99.4	<b>211</b>		411.8
100.0	<b>212</b>		413.6
100.6	<b>213</b>		415.4
101.1	<b>214</b>		417.2
101.7	<b>215</b>		419.0
102.2	<b>216</b>		420.8
102.8	<b>217</b>		422.6
103.3	<b>218</b>		424.4
103.9	<b>219</b>		426.2
104.4	<b>220</b>		428.0
105.0	<b>221</b>		429.8
105.6	<b>222</b>		431.6
106.1	<b>223</b>		433.4
106.7	<b>224</b>		435.2

°C	← °F →	°C	°F
107.2	<b>225</b>		437.0
107.8	<b>226</b>		438.8
108.3	<b>227</b>		440.6
108.9	<b>228</b>		442.4
109.4	<b>229</b>		444.2
110.0	<b>230</b>		446.0
110.6	<b>231</b>		447.8
111.1	<b>232</b>		449.6
111.7	<b>233</b>		451.4
112.2	<b>234</b>		453.2
112.8	<b>235</b>		455.0
113.3	<b>236</b>		456.8
113.9	<b>237</b>		458.6
114.4	<b>238</b>		460.4
115.0	<b>239</b>		462.2
115.6	<b>240</b>		464.0
116.1	<b>241</b>		465.8
116.7	<b>242</b>		467.6
117.2	<b>243</b>		469.4
117.8	<b>244</b>		471.2
118.3	<b>245</b>		473.0
118.9	<b>246</b>		474.8
119.4	<b>247</b>		476.6
120.0	<b>248</b>		478.4
120.6	<b>249</b>		480.2
121.1	<b>250</b>		482.0
121.7	<b>251</b>		483.8
122.2	<b>252</b>		485.6
122.8	<b>253</b>		487.4
123.3	<b>254</b>		489.2
123.9	<b>255</b>		491.0
124.4	<b>256</b>		492.8
125.0	<b>257</b>		494.6
125.6	<b>258</b>		496.4
126.1	<b>259</b>		498.2
126.7	<b>260</b>		500.0
127.2	<b>261</b>		501.8
127.8	<b>262</b>		503.6
128.3	<b>263</b>		505.4
128.9	<b>264</b>		507.2
129.4	<b>265</b>		509.0
130.0	<b>266</b>		510.8
130.6	<b>267</b>		512.6
131.1	<b>268</b>		514.4
131.7	<b>269</b>		516.2
132.2	<b>270</b>		518.0
132.8	<b>271</b>		519.8
133.3	<b>272</b>		521.6
133.9	<b>273</b>		523.4
134.4	<b>274</b>		525.2
135.0	<b>275</b>		527.0
135.6	<b>276</b>		528.8
136.1	<b>277</b>		530.6
136.7	<b>278</b>		532.4
137.2	<b>279</b>		534.2
137.8	<b>280</b>		536.0
138.3	<b>281</b>		537.8
138.9	<b>282</b>		539.6
139.4	<b>283</b>		541.4
140.0	<b>284</b>		543.2

## USEFUL TABLES

### Dimensions of Copper Conductors Standard Cross-Sections of Copper Conductors


Metric Size ISO mm <sup>2</sup>	Comparison Between AWG/kcmil and metric sizes	
	Size AWG/kcmil	Equivalent Metric Area mm <sup>2</sup>
0,2	24	0,205
—	22	0,324
0,5	20	0,519
0,75	18	0,82
1	—	—
1,5	16	1,3
2,5	14	2,1
4	12	3,3
6	10	5,3
10	8	8,4
16	6	13,3
25	4	21,2
35	2	33,6
50	0	53,5
70	00	67,4
95	000	85
—	0000	107,2
120	250 kcmil	127
150	300 kcmil	152
185	350 kcmil	177
240	500 kcmil	253
300	600 kcmil	304
350	700 kcmil	355
380	750 kcmil	380
400	800 kcmil	405
450	900 kcmil	456
500	1 000 kcmil	507
630	1 250 kcmil	634
750	1 500 kcmil	760
890	1 750 kcmil	887
1 000	2 000 kcmil	1 014

### Useful Conversion Factors

Linear Measures
1 inch (in.) = 2.54 cm 1 foot (ft.) = 30.48 cm 1 yard (yd.) = 91.44 cm 1 mile = 1609.344 m 1 centimeter (cm) = 0.0328084 ft. = 0.393701 in. = 0.01 m = 10.00 mm 1 meter (m) = 3.28084 ft. = 39.3701 in. = 1.09361 yd.
Weights
1 ounce (oz. av.) = 28.35 g. 1 pound (lb.) = 0.453 kg or 16 oz. 1 kilogram (kg) = 2.20462 lb.
Power
1 kilowatt (kW) = 1.34102 hp. 1 horsepower (hp.) = 0.745700 kW
Moment Force (Torque)
1 Newton meter (Nm) = 8.85075 lbf in. or = 0.73756 lbf ft. 1 Inch pound (lbf in.) = 0.11299 Nm 1 Foot pound (lbf ft.) = 1.35582 Nm

# EXLUX • ECOLUX • 6480 Series

6000 • 6008 • 6400 • 6408 • 6600 • 6608 • 6480

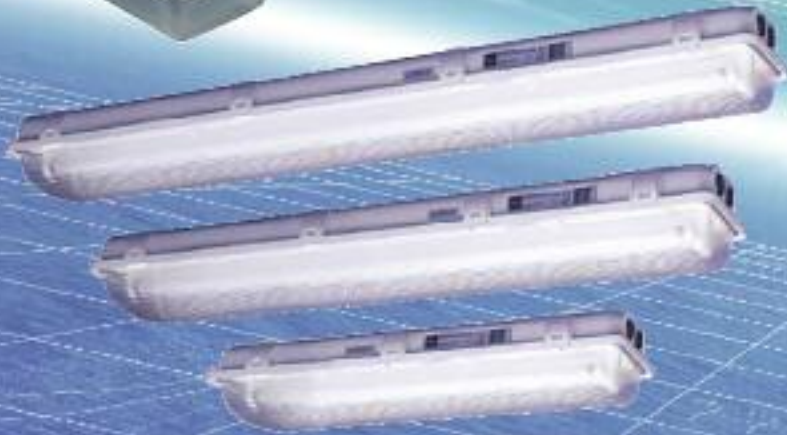

LIGHTING

STAHL

## Explosion Protected Fluorescent Luminaires for Hazardous and Corrosive Applications

### Features:

- *Electronic Ballasts*
- *For Fluorescent Bipin Lamps*
- *One or two-lamp versions:*  
17W  
32W  
40W
- *Enclosure Material: FRP*
- *Cover Material: PC*

## Explosion Protected HID Luminaires for Hazardous and Corrosive Applications

### Features:

- *Lamp type and wattage:*
  - *High Pressure Sodium*  
50W - 400W
  - *Metal Halide*  
50W - 400W
- *Polyester powder-coated*
- *Mounting styles:*
  - *Ceiling Mount*
  - *Wall Mount*
  - *Stanchion Mount 25° Angle*
  - *Stanchion Mount Straight*
  - *Pendant Mount*

STAHL

INNOVATIVE EXPLOSION PROTECTION by R. STAHL 1-800-782-4357

B



### CLASSIFICATIONS

NEC- Class I, Zone 1 & 2, AEx de IIC T4  
 Class I, Division 2, Groups A,B,C,D, T4  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III  
 Types 3, 4, 4X & IP66  
 File No. J.I.3D2A9.AE



CEC- Class I, Zone 1 & 2, Ex de IIC T4  
 Class I, Division 2, per CEC J18-150 (C)  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III

Ambient Temperature Range:  
 +55°C (+131°F) Max.  
 -20°C (-4°F) Min.

Supply Voltage 120 to 277V, ac/dc

### FEATURES

The EXLUX 6000 Series of Luminaires are designed for hostile and hazardous locations where reliability and rugged performance are critical. The housing is constructed of heavy-duty fiberglass reinforced polyester (FRP) with a single piece, low glare polycarbonate lens.

The EXLUX 6000 Series is supplied with electronic ballasts which are designed to edition 4 of IEC 60079-7 Annex H for controll of the "End of Life" of the lamps. They are available in 17, 32 and 40-Watts one or two-lamp versions. The appropriate lamps are standard T8 medium bipin. The luminaires also come with a cover interlock switch which automatically de-energizes the luminaires when opening for relamping. They also are available in either dead-end or feed-through wiring. The ballasts are self-contained flameproof enclosures with increased safety terminals for the highest degree of safety.

### INSTALLATION

The luminaire includes threaded NPT openings with grounded back plates and NPT close-up plugs. For MC-HL cable installation use TMC cable glands.

For conduit installation use conduit hubs 8166/11-0~N (See Page B7).

# EXLUX 6000 Series

## EXPLOSION PROTECTED FLUORESCENT LUMINAIRES FOR HAZARDOUS AND CORROSIVE APPLICATIONS



### Fluorescent Luminaires with Lens Interlock Switch for Div. 2, Zone 1 and Zone 2 Applications

Luminaires for Use with Standard T8 Med. Bipin Lamps

### Ordering Information

Catalog Number	Description
<b>17 Watts, 2'</b>	
6000/531-8021-0130	1-lamp luminaire 120 to 277V, ac/dc, dead-end wiring, 1 x 3/4" NPT both ends
6000/531-8521-0150	1-lamp luminaire 120 to 277V, ac/dc, 5 wire feed-thru, 1 x 3/4" NPT both ends
<b>32 Watts, 4'</b>	
6000/532-9021-0130	2-lamp luminaire 120 to 277V, ac/dc, dead-end wiring, 1 x 3/4" NPT both ends
6000/532-9521-0150	2-lamp luminaire 120 to 277V, ac/dc, 5 wire feed-thru, 1 x 3/4" NPT both ends
<b>40 Watts, 5'</b>	
6000/571-8021-0130	1-lamp luminaire 120 to 277V, ac/dc, dead-end wiring, 1 x 3/4" NPT both ends
6000/571-8521-0150	1-lamp luminaire 120 to 277V, ac/dc, 5 wire feed-thru, 1 x 3/4" NPT both ends
6000/572-9021-0130	2-lamp luminaire 120 to 277V, ac/dc, dead-end wiring, 1 x 3/4" NPT both ends
6000/572-9521-0150	2-lamp luminaire 120 to 277V, ac/dc, 5 wire feed-thru, 1 x 3/4" NPT both ends

For one 1/2" NPT entry thread at both ends, change this **2** into a **1**.  
 For two 1/2" NPT entry threads at both ends, change this **2** into a **5**.

For parts and accessories see pages B6-B8.



EXPLOSION PROTECTED FLUORESCENT EMERGENCY LUMINAIRES WITH AUTO-TESTING EMERGENCY BALLAST.



## Emergency Fluorescent Luminaires - With Battery Back-up Units and Lens Interlock Switch for Div. 2, Zone 1 & Zone 2 Applications

Luminaires for use with Standard T8 Med. Bipin Lamps

### Ordering Information

Catalog Number	Description
<b>17 Watts, 2'</b>	
<b>6008/532-9021-2147</b>	Auto Testing, 2-lamp luminaire 120V 60Hz, dead-end wiring, 1 x 3/4" NPT both ends
<b>32 Watts, 4'</b>	
<b>6008/552-9021-2147</b>	Auto Testing, 2-lamp luminaire 120V 60Hz, dead-end wiring, 1 x 3/4" NPT both ends
<b>6008/552-9621-2167</b>	Auto Testing, 2-lamp luminaire 120V 60Hz, 6 wire feed-thru, 1 x 3/4" NPT both ends

For one 1/2" NPT entry thread at both ends, change this **2** into a **1**.  
For two 1/2" NPT entry threads at both ends, change this **2** into a **5**.  
For parts and accessories see pages B6-B8.

### Status Indicator Display

LED Display	Display Description
Green LED continuously ON	Everything functional
Green LED blinking	Luminaire either function test or lighting time duration test in process
Red LED continuously ON	Battery problem, either not connected or totally discharged
Red LED blinking	Battery capacity not enough; battery needs replacement
Red LED flashing	Lamp problem, lamp is defect reached End of Life and needs replacement
LED green / red blinking	Emergency light function interrupted



### CLASSIFICATIONS

NEC & CEC

Class I, Zone 1 & 2, AEx dem IIC T4  
Class I, Division 2, Groups A,B,C,D, T4  
Class II, Divisions 1 & 2, Groups E,F,G  
Class III

Types 3, 4, 4X & IP66

File No. J.I.3D2A9.AE



Supply Voltage 120V, 50-60Hz

Ambient Temperature Range:

AC & Battery Operation +50°C (+122°F) Max.  
-20°C (-4°F) Min.

Charging & Test Operation +50°C (+122°F) Max.  
-5°C (+23°F) Min.

### FEATURES

The EXLUX 6008 Series carries out pre-programmed testing schedules, monitors emergency ballast performance and battery charging. In case of power failure the Auto-testing Emergency Ballast automatically switches to emergency mode, keeping one lamp illuminated at reduced lumen output for a minimum of 90 minutes. When AC power is restored, the luminaire returns to AC supply. The EXLUX 6008 Series of Emergency Luminaires are designed for hostile and hazardous locations where reliability and rugged performance are critical. The housing is constructed of fiberglass reinforced polyester (FRP) with a single piece, low glare polycarbonate lens. They are supplied with flameproof electronic ballasts as standard, which are designed to addition 4 of IEC 60079-7 Annex H for control of the "End of Life" of the lamps. The luminaires also come with a cover interlock switch which automatically de-energizes the luminaires when opening for relamping.

### INSTALLATION

The luminaire includes threaded NPT openings with grounded back plates and NPT close-up plugs. For MC-HL cable installation use TMC cable glands. For conduit installation use conduit hubs 8166/11-0-N (see page B7). The luminaire must be wired with a permanent charging phase which needs to be the same potential as the switched phase. The terminal capacity is 2 stranded wires 10 AWG per terminal.

### PERIODIC AUTO TESTING

The luminaire automatically performs a weekly functional test and a discharge test which is performed every six months.

### STATUS INDICATOR DISPLAY

One red LED and one green LED are incorporated into the luminaire and can be seen from the outside through the lens. The functions and test results are listed on this page.



### EXPLOSION PROTECTED FLUORESCENT LUMINAIRES FOR HAZARDOUS AND CORROSIVE APPLICATIONS



#### CLASSIFICATIONS

##### NEC & CEC

Class I, Zone 2, Group IIC T4  
 Class I, Division 2, Groups A,B,C,D, T4  
 Class II, Divisions 1 & 2, Groups E,F,G, T5  
 Class III  
 Types 3, 4, 4X & IP66  
 File No. J.I.3009378



##### Ambient Temperature:

For Class I areas:

+55°C (+131°F) Max.;  
 -18°C (0°F) Min.

For Class II & III areas:

+40°C (+104°F) Max.;  
 -18°C (0°F) Min.

##### Supply Voltages

(see ordering information)

#### FEATURES

The EXLUX 6400 Series of Luminaires are designed for hostile and hazardous locations where reliability and rugged performance are critical. The housing is constructed of heavy-duty fiberglass reinforced polyester (FRP) with a single piece, low glare polycarbonate lens.

The EXLUX 6400 Series is supplied with electronic instant-start ballasts as standard and is available in 17, 32 and 40-watts one or two-lamp versions. The two-lamp versions are dual channel, which keeps the luminaire functional should one lamp fail. The luminaires also come with a cover interlock switch which automatically de-energizes the luminaires when opening for relamping. The power factor is  $\geq .99$ . The electronic ballast meets ANSI C82.11 standards regarding harmonic distortion.

#### INSTALLATION

The luminaire includes threaded NPT openings with grounded back plates and NPT close-up plugs. For MC Cable installation use TMC cable glands.

For conduit installation use conduit hub 8166/11-0-N (See Page B7).

The appropriate lamps are standard T8 medium bipin lamps.

### Fluorescent Luminaires with Lens Interlock Switch for Div. 2 and Zone 2 Applications

Luminaires for Use with Standard T8 Med. Bipin Lamps

#### Ordering Information

Catalog Number	Description
<b>17 Watts, 2'</b>	
6400/531-8021-8130	1-lamp luminaire 120-277V 50/60Hz, dead-end wiring, 1 x 3/4" NPT both ends
6400/531-8521-8150	1-lamp luminaire 120-277V 50/60Hz, 5 wire feed-thru, 1 x 3/4" NPT both ends
6400/531-8021-7130	1-lamp luminaire 347V 50/60Hz, dead-end wiring, 1 x 3/4" NPT both ends
6400/531-8521-7150	1-lamp luminaire 347V 50/60Hz, 5 wire feed-thru, 1 x 3/4" NPT both ends
<b>32 Watts, 4'</b>	
6400/551-8021-8130	1-lamp luminaire 120-277V 50/60Hz, dead-end wiring, 1 x 3/4" NPT both ends
6400/551-8521-8150	1-lamp luminaire 120-277V 50/60Hz, 5 wire feed-thru, 1 x 3/4" NPT both ends
6400/551-8021-7130	1-lamp luminaire 347V 50/60Hz, dead-end wiring, 1 x 3/4" NPT both ends
6400/551-8521-7150	1-lamp luminaire 347V 50/60Hz, 5 wire feed-thru, 1 x 3/4" NPT both ends
<b>40 Watts, 5'</b>	
6400/571-8021-8130	1-lamp luminaire 120-277V 50/60Hz, dead-end wiring, 1 x 3/4" NPT both ends
6400/571-8521-8150	1-lamp luminaire 120-277V 50/60Hz, 5 wire feed-thru, 1 x 3/4" NPT both ends
6400/571-8021-7130	1-lamp luminaire 347 V 50/60Hz, dead-end wiring, 1 x 3/4" NPT both ends
6400/571-8521-7150	1-lamp luminaire 347 V 50/60Hz, 5 wire feed-thru, 1 x 3/4" NPT both ends
6400/572-9021-8130	2-lamp luminaire 120-277V 50/60Hz, dead-end wiring, 1 x 3/4" NPT both ends
6400/572-9521-8150	2-lamp luminaire 120-277V 50/60Hz, 5 wire feed-thru, 1 x 3/4" NPT both ends
6400/572-9021-7130	2-lamp luminaire 347 V 50/60Hz, dead-end wiring, 1 x 3/4" NPT both ends
6400/572-9521-7150	2-lamp luminaire 347 V 50/60Hz, 5 wire feed-thru, 1 x 3/4" NPT both ends

For one 1/2" NPT entry thread at both ends, change this **2** into a **1**.  
 For two 1/2" NPT entry threads at both ends, change this **2** into a **5**.

For parts and accessories see pages B6-B8.



# EXLUX 6408 Series

EXPLOSION PROTECTED FLUORESCENT EMERGENCY LUMINAIRES FOR HAZARDOUS AND CORROSIVE APPLICATIONS



## LIGHTING



### CLASSIFICATIONS

NEC & CEC

Class I, Zone 2, Group IIC T4  
 Class I, Division 2, Groups A,B,C,D, T4  
 Class II, Divisions 1 & 2, Groups E,F,G, T5  
 Class III  
 Types 3, 4, 4X & IP66  
 File No. J.I.3009378



Ambient Temperature Range:

For Class I areas:

+50°C (+122°F) Max.  
 0°C (+32°F) Min.

For Class II and III areas:

+40°C (+104°F) Max.  
 0°C (+32°F) Min.

Supply Voltage Range from 120V, to 277V, 60 Hz

### FEATURES

The EXLUX 6408 Series of Emergency Luminaire is equipped with one high temperature, maintenance free, nickel-cadmium battery back-up unit with a life expectancy of 7–10 years. In case of power failure it automatically switches over to battery supply keeping one lamp illuminated at reduced lumen output for a minimum of 90 minutes. When AC power is restored, the luminaire returns to AC supply. When the Red LED indicating light is illuminated the battery is being charged or monitored. It is visible from the outside through the lens.

The EXLUX 6408 Series is also supplied with an AC electronic instant start ballast unit and is available in 2 x 17W or 2 x 32W parallel lamps. This keeps the luminaire functional should one lamp fail. The luminaires also come with a cover interlock switch which automatically de-energizes the luminaires when opening for relamping. The power factor is ≥ .99. The electronic ballast meets ANSI C82.11 standards regarding harmonic distortion.

The EXLUX 6408 Series are designed for hostile and hazardous locations where reliability and rugged performance are critical. The housing is constructed of heavy-duty fiberglass reinforced polyester (FRP) with a single piece, low glare polycarbonate lens.

### INSTALLATION

The luminaire includes threaded NPT openings with grounded back plates and NPT close-up plugs. For MC Cable installation use TMC cable glands. For conduit installation use conduit hub 8166/11-0-N (See Page B7).

The luminaire must be wired with a permanent charging phase which needs to be the same potential as the switched phase.

The appropriate lamps are standard T8 medium bipin lamps.

## Emergency Fluorescent Luminaires with Battery Back-up Unit and Lens Interlock Switch for Div. 2 and Zone 2 Applications

Luminaires for use with Standard T8 Med. Bipin Lamps

### Ordering Information for Application in the USA

Catalog Number	Description
<b>17 Watts, 2'</b>	
6408/532-9027-8141	2-lamp luminaire 120 to 277V 50/60Hz, dead-end wiring, 1x3/4" NPT both ends
<b>32 Watts, 4'</b>	
6408/552-9027-8141	2-lamp luminaire 120 to 277V 50/60Hz, dead-end wiring, 1x3/4" NPT both ends
6408/552-9627-8161	2-lamp luminaire 120 to 277V 50/60Hz, 6 wire feed-thru, 1x3/4" NPT both ends

### Ordering Information for Application in Canada


Catalog Number	Description
<b>17 Watts, 2'</b>	
6408/532-9027-5141	2-lamp luminaire 120 V 50/60Hz, dead-end wiring, 1x3/4" NPT both ends
6408/532-9027-7141	2-lamp luminaire 347 V 50/60Hz, dead-end wiring, 1x3/4" NPT both ends
<b>32 Watts, 4'</b>	
6408/552-9027-5141	2-lamp luminaire 120 V 50/60Hz, dead-end wiring, 1x3/4" NPT both ends
6408/552-9627-5161	2-lamp luminaire 120 V 50/60Hz, 6 wire feed-thru, 1x3/4" NPT both ends
6408/552-9027-7141	2-lamp luminaire 347 V 50/60Hz, dead-end wiring, 1x3/4" NPT both ends
6408/552-9627-7161	2-lamp luminaire 347 V 50/60Hz, 6 wire feed-thru, 1x3/4" NPT both ends

For one 1/2" NPT entry thread at both ends, change this **2** into a **1**.  
 For two 1/2" NPT entry threads at both ends, change this **2** into a **5**.  
 For parts and accessories see pages B6-B8.



INNOVATIVE EXPLOSION PROTECTION by R. STAHL 1-800-782-4357

**EXLUX 6000, 6400 & 6408**

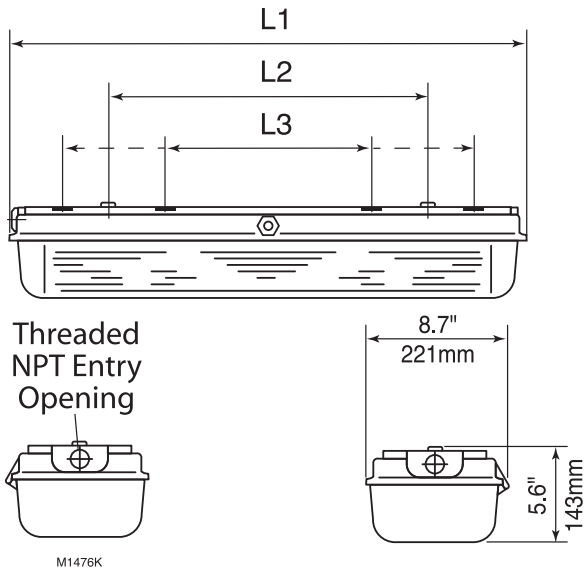


M1476K

Dimensions

	17W, 2' Fixture		32W, 4' Fixture		40W, 5' Fixture	
	inch	mm	inch	mm	inch	mm
L1	27.5"	(700mm)	51.5"	(1310mm)	63.4"	(1610mm)
L2 <sup>1)</sup>	15.7"	(400mm)	31.5"	(800mm)	31.5"	(800mm)
L3 <sup>2)</sup>	12.3"-18.3"	(312-465mm)	26.3"-34"	(670-865mm)	26.3"-34"	(670-865mm)

1) fixed mounting distance  
2) variable mounting distance

**EXLUX 6008**

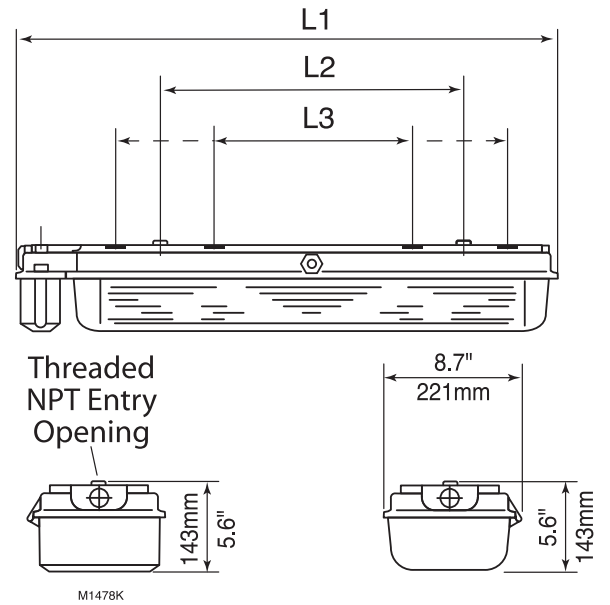

M1478K











Dimensions











	17W, 2' Fixture		32W, 4' Fixture	
	inch	mm	inch	mm
L1	30.8"	(782mm)	54.8"	(1392mm)
L2 <sup>1)</sup>	15.7"	(400mm)	31.5"	(800mm)
L3 <sup>2)</sup>	12.3"-18.3"	(312-465mm)	26.4"-34"	(670-865mm)









1) fixed mounting distance  
2) variable mounting distance



Use only the following original spare parts and accessories, any others would invalidate the certification and warranty.

Description	Type	Description	Catalog Number
Interlock Switch 8082/1-2		Interlock switch 1 NO for battery enclosure 6008 luminaire	80 820 02 01 0
Socket Wrench 1/2" (13mm)		to operate the central interlock mechanism	81 980 05 40 0
Entry Back-up Plate		stainless steel back-up plate with set screw and grounding provisions entry threads: 1 x NPT 1/2" 2 x NPT 1/2" 1 x NPT 3/4"	60 008 17 55 0 60 008 21 55 0 60 008 18 55 0
Lamp Holder		snap-in lamp holder for 6400 and 6408 luminaires	385 663 0
Lamp Holder		snap-in lamp holder for 6000 and 6008 luminaires	60 418 04 65 0
Battery Pack for luminaire 6008		Battery capacity 7Ah	60 448 01 74 0
Eye Bolts M8		1 pair can directly be screwed into the luminaire	60 008 03 90 0
Mounting Brackets with Suspension Lugs		1 pair of adjustable mounting brackets with suspension lugs	60 008 07 75 0
Ceiling Brackets		1 pair of adjustable ceiling mounting brackets	60 008 03 75 0
Pipe Clamps with Mounting Brackets		1 pair of stainless steel pipe clamps with adjustable mounting brackets for EMT 1 1/4" conduit EMT 1 1/2" conduit EMT 2" conduit	60 008 03 26 0 60 008 01 26 0 60 008 02 26 0

Description	Type		Catalog Number
Wall-Mounting Bracket 90°		1 pair of 90° stainless steel wall-mounting brackets horizontally adjustable	60 008 02 44 0
Wall-Mounting Bracket 50°		1 pair of 50° stainless steel wall-mounting brackets horizontally adjustable	60 008 01 44 0
Safety Clips		10 pcs. in one bag to avoid unintentional detachment of the lens from the luminaire.	60 008 02 94 0
Cable Gland 1/2" NPT		for MC cable with sealing ring	TMC 050A
Cable Gland 3/4" NPT		for MC cable with sealing ring	TMC 075A
Conduit Hub 1/2" NPT		Conduit hub 1/2" NPT with sealing ring	8166/11-01-N
Conduit Hub 3/4" NPT		Conduit hub 3/4" NPT with sealing ring	8166/11-02-N
Close-up Plug 1/2" NPT		Polymeric close-up plug 1/2" NPT with sealing ring	PD-E-4-0-29-00
Close-up Plug 3/4" NPT		Polymeric close-up plug 3/4" NPT with sealing ring	PD-E-4-0-30-00
Cast Wall and Corner Mounting Bracket for Stanchion Mounting		Insert 1 1/2" EMT conduit into the bracket. Use pipe clamp PN 60 008 01 26 0 to attach luminaire to conduit.	108 947

Lens		for luminaire 2' 17W 4' 32W 5' 40W	60 000 33 05 0 60 000 34 05 0 60 000 35 05 0
Interlock Switch 8080/1-3-L 20e		Switch block 2 NC	80 800 06 60 0
Fuse		to protect battery circuit 6.3A	85 600 19 01 0
Retrofit Kit for 6 Wire Feed-Through Wiring for EXLUX 6008		to retrofit dead-end luminaire EXLUX 6008 amperage rating 16 Amp max. L <sup>1</sup> , L1, L2, L3, N, PE 4' 32W	60 088 04 87 0
Retrofit Kit for 5 Wire Feed-Through Wiring for EXLUX 6000		to retrofit dead-end luminaire EXLUX 6000 amperage rating 16 Amp max. L1, L2, L3, N, PE 2' 17W 4' 32W 5' 40W	60 088 12 87 0 60 088 14 87 0 60 088 16 87 0
Electronic Ballast Unit		for use with luminaires 1x and 2x 17W EXLUX 6000, 6008 2x and 2x 32W 1x and 2x 40W	60 008 03 53 0 60 008 04 53 0 60 008 05 53 0
Auto Testing Emergency Ballast		for use with Emergency Luminaires EXLUX 6008	60 438 02 01 0
Parabolic Reflector		For 1-lamp luminaires 17W For 1-lamp luminaires 32W For 1-lamp luminaires 40W For 2-lamp luminaires 17W For 2-lamp luminaires 32W For 2-lamp luminaires 40W	60 009 10 58 0 60 009 11 58 0 60 009 12 58 0 60 009 07 58 0 60 009 08 58 0 60 009 09 58 0



## CLASSIFICATIONS

### NEC & CEC

Class I, Zone 2, Group IIC T5  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III  
 Types 3, 4, 4X & IP66  
 File No. J.I.3012747



### Ambient Temperature Range:

+40°C (+104°F) Max.;  
 -18°C (0°F) Min.

### Supply Voltages

(see ordering information)

## FEATURES

The ECOLUX 6600 Series of Luminaires are designed for hostile and hazardous locations where reliability and rugged performance are critical. The housing is constructed of heavy-duty fiberglass reinforced polyester (FRP) with a single piece, low glare polycarbonate lens.

The ECOLUX 6600 Series is supplied with electronic instant-start ballasts as standard and is available in 17, 32 and 40-Watts, one or two-lamp versions. The two-lamp versions are dual channel, which keeps the luminaire functional should one lamp fail. The power factor is  $\geq .99$ . The electronic ballast meets ANSI C82.11 standards regarding harmonic distortion.

## INSTALLATION

The luminaire includes threaded NPT openings with grounded back plates and NPT close-up plugs. For MC Cable installation use TMC cable glands.

For conduit installation use conduit hub 8166/11-0--N (See Page B11).

The appropriate lamps are standard T8 medium Bipin lamps.

# ECOLUX 6600 Series

## EXPLOSION PROTECTED FLUORESCENT LUMINAIRES FOR HAZARDOUS AND CORROSIVE APPLICATIONS



### Fluorescent Luminaires for Div. 2 and Zone 2 Applications

Luminaires for Use with Standard T8 Med. Bipin Lamps

### Ordering Information

Catalog Number	Description
<b>17 Watts, 2'</b>	
6600/531-8020-8000	1-lamp luminaire 120-277V 50/60Hz, 1 x 3/4" NPT both ends
6600/531-8020-7000	1-lamp luminaire 347V 50/60Hz, 1 x 3/4" NPT both ends
<b>32 Watts, 4'</b>	
6600/551-8020-8000	1-lamp luminaire 120-277V 50/60Hz, 1 x 3/4" NPT both ends
6600/551-8020-7000	1-lamp luminaire 347V 50/60Hz, 1 x 3/4" NPT both ends
6600/552-9020-8000	2-lamp luminaire 120-277V 50/60Hz, 1 x 3/4" NPT both ends
6600/552-9020-7000	2-lamp luminaire 347V 50/60Hz, 1 x 3/4" NPT both ends
<b>40 Watts, 5'</b>	
6600/571-8020-8000	1-lamp luminaire 120-277V 50/60Hz, 1 x 3/4" NPT both ends
6600/571-8020-7000	1-lamp luminaire 347V 50/60Hz, 1 x 3/4" NPT both ends
6600/572-9020-8000	2-lamp luminaire 120-277V 50/60Hz, 1 x 3/4" NPT both ends
6600/572-9020-7000	2-lamp luminaire 347V 50/60Hz, 1 x 3/4" NPT both ends

For one 1/2" NPT entry thread at both ends, change this **2** into a **1**.  
 For two 1/2" NPT entry threads at both ends, change this **2** into a **5**.  
 For parts and accessories see pages B11-B13.



EXPLOSION PROTECTED FLUORESCENT EMERGENCY  
LUMINAIRES FOR HAZARDOUS  
AND CORROSIVE APPLICATIONS



**Emergency Fluorescent Luminaires  
with Battery Back-up Unit  
for Div. 2 and Zone 2 Applications**

Luminaires for use with Standard T8 Med. Bipin Lamps

**Ordering Information for Application in the USA**

Catalog Number	Description
<b>17 Watts, 2'</b>	
6608/532-9027-8000	2-lamp luminaire 120 to 277V 50/60Hz, 1 x 3/4" NPT both ends
<b>32 Watts, 4'</b>	
6608/552-9027-8000	2-lamp luminaire 120 to 277V 50/60Hz, 1 x 3/4" NPT both ends

**Ordering Information for Application in Canada**

Catalog Number	Description
<b>17 Watts, 2'</b>	
6608/532-9027-5000	2-lamp luminaire 120V 50/60Hz, 1 x 3/4" NPT both ends
6608/532-9027-7000	2-lamp luminaire 347V 50/60Hz, 1 x 3/4" NPT both ends
<b>32 Watts, 4'</b>	
6608/552-9027-5000	2-lamp luminaire 120V 50/60Hz, 1 x 3/4" NPT both ends
6608/552-9027-7000	2-lamp luminaire 347V 50/60Hz, 1 x 3/4" NPT both ends

For one 1/2" NPT entry thread at both ends, change this **2** into a **1**.  
For two 1/2" NPT entry threads at both ends, change this **2** into a **5**.  
For parts and accessories see pages B11-B13.

**CLASSIFICATIONS**

NEC & CEC

- Class I, Zone 2, Group IIC T5
- Class I, Division 2, Groups A,B,C,D
- Class II, Divisions 1 & 2, Groups E,F,G
- Class III
- Types 3, 4, 4X & IP66
- File No. J.I.3012747



Ambient Temperature Range:

- +40°C (+104°F) Max.
- 0°C (32°F) Min.

**FEATURES**

The ECOLUX 6608 Series of Emergency Luminaire is equipped with one high temperature, maintenance free, nickel-cadmium battery back-up unit with a life expectancy of 7–10 years. In case of power failure it automatically switches over to battery supply keeping one lamp illuminated at reduced lumen output for a minimum of 90 minutes. When AC power is restored, the luminaire returns to AC supply. When the Red LED indicating light is illuminated the battery is being charged or monitored. It is visible from the outside through the lens.

The ECOLUX 6608 Series is also supplied with an AC electronic instant start ballast unit and is available in 2 x 17W or 2 x 32W parallel lamps. This keeps the luminaire functional should one lamp fail. The power factor is ≥ .99. The electronic ballast meets ANSI C82.11 standards regarding harmonic distortion.

The ECOLUX 6608 Series are designed for hostile and hazardous locations where reliability and rugged performance are critical. The housing is constructed of heavy-duty fiberglass reinforced polyester (FRP) with a single piece, low glare polycarbonate lens.

**INSTALLATION**

The luminaire includes threaded NPT openings with grounded back plates and NPT close-up plugs. For MC Cable installation use TMC cable glands. For conduit installation use conduit hub 8166/11-0-N.

The luminaire must be wired with a permanent charging phase which needs to be the same potential as the switched phase.

The appropriate lamps are standard T8 medium Bipin lamps.



**ECOLUX 6600 & 6608**

**Dimensions**

	17 W	32 W	40 W
L1	700 mm 27.5"	1310 mm 51.6"	1610 mm 63.4"
L2	400 mm 15.75"	800 mm 31.5"	800 mm 31.5"
L3	340 - 460 mm 13.4" - 18.1"	680 - 920 mm 26.8" - 36.2"	795 - 1030 mm 31.3" - 40.5"

**Opening the Luminaire**



**Parts and Accessories**
















Use only the following original spare parts and accessories, any others would invalidate the certification and warranty.

Item	Image	Description	Catalog Number
Conduit Hub 1/2" NPT		Conduit hub 1/2" NPT with sealing ring	8166/11-01-N
Conduit Hub 3/4" NPT		Conduit hub 3/4" NPT with sealing ring	8166/11-02-N
Close-up plug 1/2" NPT		Polymeric close-up plug 1/2" NPT with sealing ring	PD-E-4-0-29-00
Close-up plug 3/4" NPT		Polymeric close-up plug 3/4" NPT with sealing ring	PD-E-4-0-30-00
Parabolic Reflector (Optional)		For retro-fitting for 1-lamp luminaires: 17W 32W 40W for 2-lamp luminaires: 17W 32W 40W	60 309 03 58 0 60 309 04 58 0 60 309 06 58 0  60 309 01 58 0 60 309 02 58 0 60 309 05 58 0

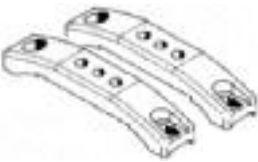

Use only the following original spare parts and accessories, any others would invalidate the certification and warranty.

Item	Image	Description	Catalog Number
Cast wall and corner mounting bracket for stanchion mounting	 S0613P	Insert 1 1/2" EMT conduit into bracket Use pipe clamps (PN 66 008 01 26 0) to attach luminaire to conduit	461 717 0
Lens		for luminaires 2' 17W 4' 32W 5' 40W	66 000 01 05 0 66 000 02 05 0 66 000 03 05 0
Snap Action Buckles		Color: White      10 Pieces	66 008 01 40 0
		Color: Black      6 Pieces	66 008 02 40 0
		Color: Black      2 Pieces with a borehole for switch actuation	66 008 03 40 0
Lamp Holder		snap-in lamp holder	385 663 0
Entry back-up plate		stainless steel back-up plate with set screw and grounding provisions entry threads: 1 x NPT 1/2" 2 x NPT 1/2" 1 x NPT 3/4"	60 008 17 55 0 60 008 21 55 0 60 008 18 55 0
Eye bolts M8		1 pair of eye bolts M8 can be directly screwed into the inserts of the luminaire for fixed suspension points	60 008 03 90 0
Ceiling Mounting brackets		1 pair of fixed ceiling mounting brackets for fixed mounting points	66 008 03 75 0

Item	Image	Description	Catalog Number
Mounting Brackets		1 pair of mounting brackets for adjustable mounting points	66 008 01 75 0
Suspension Lugs		1 pair of stainless steel suspension lugs which can only be used together with mounting brackets P/N 66 008 01 75 0	60 008 02 18 0
		1 pair of stainless steel suspension lugs c/w adjustable mounting brackets for adjustable suspension points	66 008 02 75 0
Pipe Clamps		1 pair of stainless steel pipe clamps c/w adjustable mounting brackets for adjustable mounting points EMT 1 1/4" EMT 1 1/2" EMT 2"	66 008 05 26 0 66 008 01 26 0 66 008 02 26 0
Tiltable Wall Mounting bracket		1 pair of stainless steel wall mounting brackets which tilt at 15° increments complete with adjustable mounting brackets for adjustable mounting points	66 008 04 26 0
Clamps for Wire Basket Systems		1 pair of stainless steel brackets suitable for fastening luminaire to a wire basket system	66 008 03 26 0
Cable Gland 1/2" NPT		For standard MC Cable with sealing ring	TMC 050A
Cable Gland 3/4" NPT		For standard MC Cable with sealing ring	TMC 075A



## CLASSIFICATIONS

Files E 258154,  
 E312925

### NEC and CEC

- Class I, Division 2, Groups ABC&D
- Class I, Zone 2, Group IIC
- Class II, Division 2, Groups F&G
- Class III

### Ambient Temperature:

- 40°C/55°C (104°F/131°F) Max.;
- 25°C (-13°F) Min.

Types 3, 4, 4X, IP 66

Suitable for Non-recessed Marine

### FEATURES

- Power Factor 0.9 (compensated)
- Cast copper-free aluminum housings and mounting covers with polyester powder finish provide excellent corrosion resistance
- Heat and impact resistant internally fluted glass
- Wide range of light sources and wattages to meet specifiers' needs
- All external hardware is stainless steel for maximum corrosion resistance
- Polyester powder coated aluminum guards offer maximum impact protection for tempered glass globes
- Dome fiberglass reinforced polyester reflectors
- Easy, "hands free" access for wiring, maintenance and relamping



## 6480 Nomenclature

6480/1    0    0    0 - 0    00    0 - 0    0    0 - 0  
 (A)    (B)    (C)    (D)    (E)    (F)    (G)    (H)    (I)    (J)    (K)

### (A) 6480/1 Series

- 1 – Polyester powder-coated, cast aluminum, hazardous location HID luminaire

### (B) Globe Size

- 1 – Size 1 small glass globe
- 2 – Size 2 long glass globe
- 3 – Size 3 large glass globe

### (C) Mounting Style

- 3 – Ceiling Mount
- 4 – Wall Mount
- 5 – Stanchion Mount  
25° Angle
- 6 – Stanchion Mount Straight
- 7 – Pendant Mount

### (D) Conduit Entry Size

- 1 – 1/2" NPT
- 2 – 3/4" NPT
- 3 – 1" NPT
- 4 – 1-1/4" NPT Stanchion
- 5 – 1-1/2" NPT Stanchion

### (E) Lamp Type (NEMA DECAL)

- 2 – **Metal Halide (MH)**
- 3 – **High Pressure Sodium (HPS)**

### (F) Lamp Wattage (NEMA DECAL)

- 05 – 50 W (**MH, HPS**)
- 07 – 70 W (**MH, HPS**)
- 10 – 100 W (**MH, HPS**)
- 15 – 150 W (**MH, HPS**)
- 17 – 175 W (**MH**)
- 20 – 200 W (**HPS**)
- 25 – 250 W (**MH, HPS**)
- 40 – 400 W (**MH, HPS**)

### (G) Lamp Holder

- 1 – Medium Base E26
- 2 – Mogul Base E39

### (H) Capacitor

- 0 – Without Capacitor
- 1 – With Capacitor

### (I) Guard Options

- 0 – Without Guard
- 1 – With Guard

### (J) Surface Finish

- 0 – Polyester powder-coated

### (K) Voltage

- 1 – 120/220/240 V, 50 Hz
- 2 – 120 V, 60 Hz
- 3 – 277 V, 60 Hz
- 4 – 120/208/240/277 V, 60 Hz, QUAD
- 5 – 120/277/347 V, 60 Hz TRI (Canada)
- 6 – 120/208/240/277/480 V, 60 Hz QUIN
- 7 – 480 V, 60 Hz
- 8 – 220 V, 60 Hz



**Series 6480/11; Size 1**

Lamp		Ambient Temperature $T_a =$	Class I, Division 2, Groups A, B, C & D (lamp temperatures)	Class I, Zone 2, Group II C, (lamp temperatures)	Class II, Division 2, Groups F & G with reflector (surface temperatures)	Supply Wire Temperature Rating
Type	Wattage					
HPS	50 W	40° C / 104° F	T2C (230° C / 446° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	90° C
		55° C / 131° F	T2C (230° C / 446° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	90° C
	70 W	40° C / 104° F	T2C (230° C / 446° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	90° C
		55° C / 131° F	T2C (230° C / 446° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	90° C
	100 W	40° C / 104° F	T2B (260° C / 500° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	105° C
		55° C / 131° F	T2B (260° C / 500° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	105° C
150 W	40° C / 104° F	T2B (260° C / 500° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	105° C	
	55° C / 131° F	T2B (260° C / 500° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	105° C	
MH	50 W	40° C / 104° F	T3 (200° C / 392° F)	T3 (200° C / 392° F)	T4A (120° C / 248° F)	90° C
		55° C / 131° F	T2D (215° C / 419° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	90° C
	70 W	40° C / 104° F	T3 (200° C / 392° F)	T3 (200° C / 392° F)	T4A (120° C / 248° F)	75° C
		55° C / 131° F	T2D (215° C / 419° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	90° C
	100 W	40° C / 104° F	T2B (260° C / 500° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	90° C
		55° C / 131° F	T2B (260° C / 500° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	105° C
150 W	40° C / 104° F	T2A (280° C / 536° F)	T2 (300° C / 572° F)	T4A (120° C / 248° F)	105° C	

**Series 6480/12; Size 2**

Lamp		Ambient Temperature $T_a =$	Class I, Division 2, Groups A, B, C & D (lamp temperatures)	Class I, Zone 2, Group II C, (lamp temperatures)	Class II, Division 2, Groups F & G with reflector (surface temperatures)	Supply Wire Temperature Rating
Type	Wattage					
MH	175 W	40° C / 104° F	T2A (280° C / 536° F)	T2 (300° C / 572° F)	T3C (160° C / 320° F)	125° C
	250 W	40° C / 104° F	T2A (280° C / 536° F)	T2 (300° C / 572° F)	T3C (160° C / 320° F)	125° C

**Series 6480/13; Size 3**

Lamp		Ambient Temperature $T_a =$	Class I, Division 2, Groups A, B, C & D (lamp temperatures)	Class I, Zone 2, Group II C, (lamp temperatures)	Class II, Division 2, Groups F & G with reflector (surface temperatures)	Supply Wire Temperature Rating
Type	Wattage					
HPS	200 W	40° C / 104° F	T1 (450° C / 842° F)	T1 (450° C / 842° F)	T2B (260° C / 500° F)	105° C
		55° C / 131° F	T1 (450° C / 842° F)	T1 (450° C / 842° F)	T2A (280° C / 536° F)	105° C
	250 W	40° C / 104° F	T1 (450° C / 842° F)	T1 (450° C / 842° F)	T2B (260° C / 500° F)	105° C
		55° C / 131° F	T1 (450° C / 842° F)	T1 (450° C / 842° F)	T2A (280° C / 536° F)	105° C
	400 W	40° C / 104° F	T1 (450° C / 842° F)	T1 (450° C / 842° F)	T2B (260° C / 500° F)	105° C
		55° C / 131° F	T1 (450° C / 842° F)	T1 (450° C / 842° F)	T2A (280° C / 536° F)	105° C
MH	400 W *	40° C / 104° F	T2B (260° C / 500° F)	T2 (300° C / 572° F)	T2B (260° C / 500° F)	105° C
		55° C / 131° F	T2B (260° C / 500° F)	T2 (300° C / 572° F)	T2B (260° C / 500° F)	105° C

\* Not suitable for Class II, Div. 2, Group G.

EXPLOSION PROTECTED 50 - 400 WATTS METAL HALIDE LUMINAIRES

### Ordering Information



PENDANT MOUNT

Lamp Watts	ANSI Lamp	Conduit-Size	Voltage 60 Hz	Catalog Number
				Incl. Globe and Guard
50	M110	3/4"	QUAD	6480/1172-2051-110-4
			TRI	6480/1172-2051-110-5
			480	6480/1172-2051-110-7
70	M98/M143	3/4"	QUAD	6480/1172-2071-110-4
			TRI	6480/1172-2071-110-5
			480	6480/1172-2071-110-7
100	M90	3/4"	QUAD	6480/1172-2101-110-4
			TRI	6480/1172-2101-110-5
			480	6480/1172-2101-110-7
150	M102	3/4"	QUAD	6480/1172-2151-110-4
			TRI	6480/1172-2151-110-5
			480	6480/1172-2151-110-7
175	M57/M137	3/4"	QUAD	6480/1272-2172-110-4
			TRI	6480/1272-2172-110-5
			480	6480/1272-2172-110-7
250	M58/M138	3/4"	QUAD	6480/1272-2252-110-4
			TRI	6480/1272-2252-110-5
			480	6480/1272-2252-110-7
400*	M59	3/4"	QUAD	6480/1372-2402-110-4
			TRI	6480/1372-2402-110-5
			480	6480/1372-2402-110-7

For 1" conduit, change this 2 into a 3.



CEILING MOUNT

Lamp Watts	ANSI Lamp	Conduit-Size	Voltage 60 Hz	Catalog Number
				Incl. Globe and Guard
50	M110	3/4"	QUAD	6480/1132-2051-110-4
			TRI	6480/1132-2051-110-5
			480	6480/1132-2051-110-7
70	M98/M143	3/4"	QUAD	6480/1132-2071-110-4
			TRI	6480/1132-2071-110-5
			480	6480/1132-2071-110-7
100	M90	3/4"	QUAD	6480/1132-2101-110-4
			TRI	6480/1132-2101-110-5
			480	6480/1132-2101-110-7
150	M102	3/4"	QUAD	6480/1132-2151-110-4
			TRI	6480/1132-2151-110-5
			480	6480/1132-2151-110-7
175	M57/M137	3/4"	QUAD	6480/1232-2172-110-4
			TRI	6480/1232-2172-110-5
			480	6480/1232-2172-110-7
250	M58/M138	3/4"	QUAD	6480/1232-2252-110-4
			TRI	6480/1232-2252-110-5
			480	6480/1232-2252-110-7
400*	M59	3/4"	QUAD	6480/1332-2402-110-4
			TRI	6480/1332-2402-110-5
			480	6480/1332-2402-110-7

For parts and accessories see page B25.

For other conduit sizes, consult factory.

\* Not suitable for Class II, Div. 2, Group G.

EXPLOSION PROTECTED 50 - 400 WATTS METAL HALIDE LUMINAIRES

**Ordering Information**

Lamp Watts	ANSI Lamp	Conduit-Size	Voltage 60 Hz	Catalog Number
				Incl. Globe and Guard
50	M110	3/4"	QUAD	6480/1142-2051-110-4
			TRI	6480/1142-2051-110-5
			480	6480/1142-2051-110-7
70	M98/M143	3/4"	QUAD	6480/1142-2071-110-4
			TRI	6480/1142-2071-110-5
			480	6480/1142-2071-110-7
100	M90	3/4"	QUAD	6480/1142-2101-110-4
			TRI	6480/1142-2101-110-5
			480	6480/1142-2101-110-7
150	M102	3/4"	QUAD	6480/1142-2151-110-4
			TRI	6480/1142-2151-110-5
			480	6480/1142-2151-110-7
175	M57/M137	3/4"	QUAD	6480/1242-2172-110-4
			TRI	6480/1242-2172-110-5
			480	6480/1242-2172-110-7
250	M58/M138	3/4"	QUAD	6480/1242-2252-110-4
			TRI	6480/1242-2252-110-5
			480	6480/1242-2252-110-7
400*	M59	3/4"	QUAD	6480/1342-2402-110-4
			TRI	6480/1342-2402-110-5
			480	6480/1342-2402-110-7



**WALL MOUNT**

For other conduit sizes, consult factory.

Lamp Watts	ANSI Lamp	Conduit-Size	Voltage 60 Hz	Catalog Number
				Incl. Globe and Guard
50	M110	1 1/2"	QUAD	6480/1155-2051-110-4
			TRI	6480/1155-2051-110-5
			480	6480/1155-2051-110-7
70	M98/M143	1 1/2"	QUAD	6480/1155-2071-110-4
			TRI	6480/1155-2071-110-5
			480	6480/1155-2071-110-7
100	M90	1 1/2"	QUAD	6480/1155-2101-110-4
			TRI	6480/1155-2101-110-5
			480	6480/1155-2101-110-7
150	M102	1 1/2"	QUAD	6480/1155-2151-110-4
			TRI	6480/1155-2151-110-5
			480	6480/1155-2151-110-7
175	M57/M137	1 1/2"	QUAD	6480/1255-2172-110-4
			TRI	6480/1255-2172-110-5
			480	6480/1255-2172-110-7
250	M58/M138	1 1/2"	QUAD	6480/1255-2252-110-4
			TRI	6480/1255-2252-110-5
			480	6480/1255-2252-110-7
400*	M59	1 1/2"	QUAD	6480/1355-2402-110-4
			TRI	6480/1355-2402-110-5
			480	6480/1355-2402-110-7



**STANCHION MOUNT  
25° ANGLE**

For parts and accessories see page B25.

\* Not suitable for Class II, Div. 2, Group G.

For 1 1/4" conduit, change this 5 into a 4.

EXPLOSION PROTECTED 50 - 400 WATTS METAL HALIDE LUMINAIRES

## Ordering Information



**STANCHION MOUNT  
STRAIGHT**

Lamp Watts	ANSI Lamp	Conduit- Size	Voltage 60 Hz	Catalog Number
				Incl. Globe and Guard
50	M110	1 1/2"	QUAD	6480/1165-2051-110-4
			TRI	6480/1165-2051-110-5
			480	6480/1165-2051-110-7
70	M98/M143	1 1/2"	QUAD	6480/1165-2071-110-4
			TRI	6480/1165-2071-110-5
			480	6480/1165-2071-110-7
100	M90	1 1/2"	QUAD	6480/1165-2101-110-4
			TRI	6480/1165-2101-110-5
			480	6480/1165-2101-110-7
150	M102	1 1/2"	QUAD	6480/1165-2151-110-4
			TRI	6480/1165-2151-110-5
			480	6480/1165-2151-110-7
175	M57/M137	1 1/2"	QUAD	6480/1265-2172-110-4
			TRI	6480/1265-2172-110-5
			480	6480/1265-2172-110-7
250	M58/M138	1 1/2"	QUAD	6480/1265-2252-110-4
			TRI	6480/1265-2252-110-5
			480	6480/1265-2252-110-7
400*	M59	1 1/2"	QUAD	6480/1365-2402-110-4
			TRI	6480/1365-2402-110-5
			480	6480/1365-2402-110-7

For parts and accessories see page B25.

\* Not suitable for Class II, Div. 2, Group G.

For 1 1/4" conduit, change this 5 into a 4.

EXPLOSION PROTECTED 50 - 400 WATTS  
HIGH PRESSURE SODIUM LUMINAIRES

**Ordering Information**

Lamp Watts	ANSI Lamp	Conduit-Size	Voltage 60 Hz	Catalog Number
				Incl. Globe and Guard
50	S68	3/4"	QUAD	6480/1172-3051-110-4
			TRI	6480/1172-3051-110-5
			480	6480/1172-3051-110-7
70	S62	3/4"	QUAD	6480/1172-3071-110-4
			TRI	6480/1172-3071-110-5
			480	6480/1172-3071-110-7
100	S54	3/4"	QUAD	6480/1172-3101-110-4
			TRI	6480/1172-3101-110-5
			480	6480/1172-3101-110-7
150	S55/S56	3/4"	QUAD	6480/1172-3151-110-4
			TRI	6480/1172-3151-110-5
			480	6480/1172-3151-110-7
200	S66	3/4"	QUAD	6480/1372-3202-110-4
			TRI	6480/1372-3202-110-5
			480	6480/1372-3202-110-7
250	S50	3/4"	QUAD	6480/1372-3252-110-4
			TRI	6480/1372-3252-110-5
			480	6480/1372-3252-110-7
400	S51	3/4"	QUAD	6480/1372-3402-110-4
			TRI	6480/1372-3402-110-5
			480	6480/1372-3402-110-7



**PENDANT MOUNT**

For 1" conduit, change this 2 into a 3.

Lamp Watts	ANSI Lamp	Conduit-Size	Voltage 60 Hz	Catalog Number
				Incl. Globe and Guard
50	S68	3/4"	QUAD	6480/1132-3051-110-4
			TRI	6480/1132-3051-110-5
			480	6480/1132-3051-110-7
70	S62	3/4"	QUAD	6480/1132-3071-110-4
			TRI	6480/1132-3071-110-5
			480	6480/1132-3071-110-7
100	S54	3/4"	QUAD	6480/1132-3101-110-4
			TRI	6480/1132-3101-110-5
			480	6480/1132-3101-110-7
150	S55/S56	3/4"	QUAD	6480/1132-3151-110-4
			TRI	6480/1132-3151-110-5
			480	6480/1132-3151-110-7
200	S66	3/4"	QUAD	6480/1332-3202-110-4
			TRI	6480/1332-3202-110-5
			480	6480/1332-3202-110-7
250	S50	3/4"	QUAD	6480/1332-3252-110-4
			TRI	6480/1332-3252-110-5
			480	6480/1332-3252-110-7
400	S51	3/4"	QUAD	6480/1332-3402-110-4
			TRI	6480/1332-3402-110-5
			480	6480/1332-3402-110-7



**CEILING MOUNT**

For parts and accessories see page B25.  
For other conduit sizes, consult factory.

# 6480 High Pressure Sodium Series

LIGHTING

EXPLOSION PROTECTED 50 - 400 WATTS  
HIGH PRESSURE SODIUM LUMINAIRES

## Ordering Information



WALL MOUNT

Lamp Watts	ANSI Lamp	Conduit-Size	Voltage 60 Hz	Catalog Number
				Incl. Globe and Guard
50	S68	3/4"	QUAD	6480/1142-3051-110-4
			TRI	6480/1142-3051-110-5
			480	6480/1142-3051-110-7
70	S62	3/4"	QUAD	6480/1142-3071-110-4
			TRI	6480/1142-3071-110-5
			480	6480/1142-3071-110-7
100	S54	3/4"	QUAD	6480/1142-3101-110-4
			TRI	6480/1142-3101-110-5
			480	6480/1142-3101-110-7
150	S55/S56	3/4"	QUAD	6480/1142-3151-110-4
			TRI	6480/1142-3151-110-5
			480	6480/1142-3151-110-7
200	S66	3/4"	QUAD	6480/1342-3202-110-4
			TRI	6480/1342-3202-110-5
			480	6480/1342-3202-110-7
250	S50	3/4"	QUAD	6480/1342-3252-110-4
			TRI	6480/1342-3252-110-5
			480	6480/1342-3252-110-7
400	S51	3/4"	QUAD	6480/1342-3402-110-4
			TRI	6480/1342-3402-110-5
			480	6480/1342-3402-110-7

For other conduit sizes, consult factory.



STANCHION MOUNT  
25° ANGLE

Lamp Watts	ANSI Lamp	Conduit-Size	Voltage 60 Hz	Catalog Number
				Incl. Globe and Guard
50	S68	1 1/2"	QUAD	6480/1155-3051-110-4
			TRI	6480/1155-3051-110-5
			480	6480/1155-3051-110-7
70	S62	1 1/2"	QUAD	6480/1155-3071-110-4
			TRI	6480/1155-3071-110-5
			480	6480/1155-3071-110-7
100	S54	1 1/2"	QUAD	6480/1155-3101-110-4
			TRI	6480/1155-3101-110-5
			480	6480/1155-3101-110-7
150	S55/S56	1 1/2"	QUAD	6480/1155-3151-110-4
			TRI	6480/1155-3151-110-5
			480	6480/1155-3151-110-7
200	S66	1 1/2"	QUAD	6480/1355-3202-110-4
			TRI	6480/1355-3202-110-5
			480	6480/1355-3202-110-7
250	S50	1 1/2"	QUAD	6480/1355-3252-110-4
			TRI	6480/1355-3252-110-5
			480	6480/1355-3252-110-7
400	S51	1 1/2"	QUAD	6480/1355-3402-110-4
			TRI	6480/1355-3402-110-5
			480	6480/1355-3402-110-7

For parts and accessories see page B25.

For 1 1/4" conduit, change this 5 into a 4.



EXPLOSION PROTECTED 50 - 400 WATTS  
HIGH PRESSURE SODIUM LUMINAIRES

**Ordering Information**

Lamp Watts	ANSI Lamp	Conduit-Size	Voltage 60 Hz	Catalog Number
				Incl. Globe and Guard
50	S68	1 1/2"	QUAD	6480/1165-3051-110-4
			TRI	6480/1165-3051-110-5
			480	6480/1165-3051-110-7
70	S62	1 1/2"	QUAD	6480/1165-3071-110-4
			TRI	6480/1165-3071-110-5
			480	6480/1165-3071-110-7
100	S54	1 1/2"	QUAD	6480/1165-3101-110-4
			TRI	6480/1165-3101-110-5
			480	6480/1165-3101-110-7
150	S55/S56	1 1/2"	QUAD	6480/1165-3151-110-4
			TRI	6480/1165-3151-110-5
			480	6480/1165-3151-110-7
200	S66	1 1/2"	QUAD	6480/1365-3202-110-4
			TRI	6480/1365-3202-110-5
			480	6480/1365-3202-110-7
250	S50	1 1/2"	QUAD	6480/1365-3252-110-4
			TRI	6480/1365-3252-110-5
			480	6480/1365-3252-110-7
400	S51	1 1/2"	QUAD	6480/1365-3402-110-4
			TRI	6480/1365-3402-110-5
			480	6480/1365-3402-110-7



**STANCHION MOUNT  
STRAIGHT**

For parts and accessories see page B25.

For 1 1/4" conduit, change this 5 into a 4.

## SIZE 1 SELECTION CHART

### Mounting Options

	Ceiling	Wall	Pendant	25° Stanchion	90° Stanchion	
<b>Conduit Entries</b>						<b>Stanchion Thread</b>
1/2"-NPT	P/N 6480/1031	P/N 6480/1041	P/N 6480/1071	P/N 6480/1054	P/N 6480/1064	1 1/4"-NPT
3/4"-NPT	P/N 6480/1032	P/N 6480/1042	P/N 6480/1072	P/N 6480/1055	P/N 6480/1065	1 1/2"-NPT
1"-NPT	P/N 6480/1033	P/N 6480/1043	P/N 6480/1073			

### Ordering Information

Lamp Size	Catalog Number Medium Base	
	HPS	MH
50W	6480/1100-3051-100-4	6480/1100-2051-100-4
70W	6480/1100-3071-100-4	6480/1100-2071-100-4
100W	6480/1100-3101-100-4	6480/1100-2101-100-4
150W	6480/1100-3151-100-4	6480/1100-2151-100-4

These Ballast housings come with a QUAD Ballast, which has tapings for 120/208/240/277 V, 60 Hz.

Note: For greater wattages see Luminaires – Sizes 2 & 3 on pages B23 & B24

### Ballast Housing - Size 1

### Medium Base



### Glass Globe-Size 1

P/N 648000580010



### Guard-Size 1

P/N 648000140020 (optional)



### Reflector 30° (FRP)

P/N 648080580030 (optional)








### Reflector (FRP)

P/N 648080580020 (optional)



SIZE 2 SELECTION CHART

**Mounting Options**

	<b>Ceiling</b>	<b>Wall</b>	<b>Pendant</b>	<b>25° Stanchion</b>	<b>90° Stanchion</b>	
						
<b>Conduit Entries</b>						<b>Stanchion Thread</b>
	<b>P/N</b>	<b>P/N</b>	<b>P/N</b>	<b>P/N</b>	<b>P/N</b>	
1/2"-NPT	6480/1031	6480/1041	6480/1071	6480/1054	6480/1064	1 1/4"-NPT
3/4"-NPT	6480/1032	6480/1042	6480/1072	6480/1055	6480/1065	1 1/2"-NPT
1"-NPT	6480/1033	6480/1043	6480/1073			

**Ordering Information**

<b>Lamp Size</b>	<b>Catalog Number Mogul Base</b>	
	<b>HPS</b>	<b>MH</b>
50W	6480/1200-3052-100-4	6480/1200-2052-100-4
70W	6480/1200-3072-100-4	6480/1200-2072-100-4
100W	6480/1200-3102-100-4	6480/1200-2102-100-4
150W	6480/1200-3152-100-4	6480/1200-2152-100-4
175W	N/A	6480/1200-2172-100-4
200W	see Luminaire - Size 3 pg B24	N/A
250W	see Luminaire - Size 3 pg B24	6480/1200-2252-100-4

These Ballast housings come with a QUAD Ballast, which has tapings for 120/208/240/277 V, 60 Hz.

Note: For greater wattages see Luminaires – Size 3 on page B23 & B24.

**Ballast Housing - Size 2**


**Mogul Base**



**Glass Globe-Size 2**  
P/N 648000580210



**Guard-Size 2**  
P/N 648000140030  
(optional)



**Reflector 30° (FRP)**  
P/N 648080580030  
(optional)



**Reflector (FRP)**  
P/N 648080580020  
(optional)



## SIZE 3 SELECTION CHART

### Mounting Options

	Ceiling	Wall	Pendant	25° Stanchion	90° Stanchion	
<b>Conduit Entries</b>						<b>Stanchion Thread</b>
1/2"-NPT	P/N 6480/1331	P/N 6480/1341	P/N 6480/1371	P/N 6480/1354	P/N 6480/1364	1 1/4"-NPT
3/4"-NPT	6480/1332	6480/1342	6480/1372	6480/1355	6480/1365	1 1/2"-NPT
1"-NPT	6480/1333	6480/1343	6480/1373			

### Ordering Information

Lamp Size	Catalog Number Mogul Base	
	HPS	MH
200W	6480/1300-3202-100-4	N/A
250W	6480/1300-3252-100-4	see Luminaire - Size 2 pg. B23
400W	6480/1300-3402-100-4	6480/1300-2402-100-4

These Ballast housings come with a QUAD Ballast, which has tapings for 120/208/240/277 V, 60 Hz.

### Ballast Housing - Size 3



### Glass Globe-Size 3

P/N 648000580310



### Guard-Size 3

P/N 648000140040 (optional)



### Reflector (FRP) Size 3


P/N 648080580320 (optional)





Use only the following original spare parts and accessories, any others would invalidate the certification and warranty.

Item	Image	Description	Catalog Number
Cover for Pendant Mount		6480/11 & 12 – Sizes 1 & 2 for 3/4" NPT Conduit for 1" NPT Conduit 6480/13 – Size 3 for 3/4" NPT Conduit for 1" NPT Conduit	648080050050 648080050060  648080050360 648080050350
Cover for Ceiling Mount		6480/11 & 12 – Sizes 1 & 2 for 1/2" NPT Conduit for 3/4" NPT Conduit for 1" NPT Conduit 6480/13 – Size 3 for 3/4" NPT Conduit for 1" NPT Conduit	648080050190 648080050010 648080050020  648080050310 648080050320
Cover for Wall Mount		6480/11 & 12 – Sizes 1 & 2 for 1/2" NPT Conduit for 3/4" NPT Conduit for 1" NPT Conduit 6480/13 – Size 3 for 3/4" NPT Conduit for 1" NPT Conduit	648080050200 648080050090 648080050100  648080050390 648080050400
Cover for Stanchion Mount 25° Angle		6480/11 & 12 – Sizes 1 & 2 for 1 1/4" NPT Conduit for 1 1/2" NPT Conduit 6480/13 – Size 3 for 1 1/4" NPT Conduit for 1 1/2" NPT Conduit	648080050120 648080050110  648080050420 648080050410
Cover for Stanchion Mount Straight		6480/11 & 12 – Sizes 1 & 2 for 1 1/4" NPT Conduit for 1 1/2" NPT Conduit 6480/13 – Size 3 for 1 1/4" NPT Conduit for 1 1/2" NPT Conduit	648080050140 648080050130  648080050440 648080050430
Heat and Impact Resistant Glass Globe, Clear		for 6480/11 – Size 1 for 6480/12 – Size 2 for 6480/13 – Size 3	648080580010 648080580210 648080580310
Globe Guard, Polyester Powder Coated Aluminum, with Stainless Steel Screws & Safety Chain		for 6480/11 – Size 1 for 6480/12 – Size 2 for 6480/13 – Size 3	648080140010 648080140210 648080140310
Reflector Made of FRP with Stainless Steel Screws		for 6480/11 & 6480/12 – Sizes 1 & 2 for 6480/13 – Size 3	648080580020 648080580320
Reflector 30° Made of FRP with Stainless Steel Screws		for 6480/11 & 6480/12 – Sizes 1 & 2	648080580030

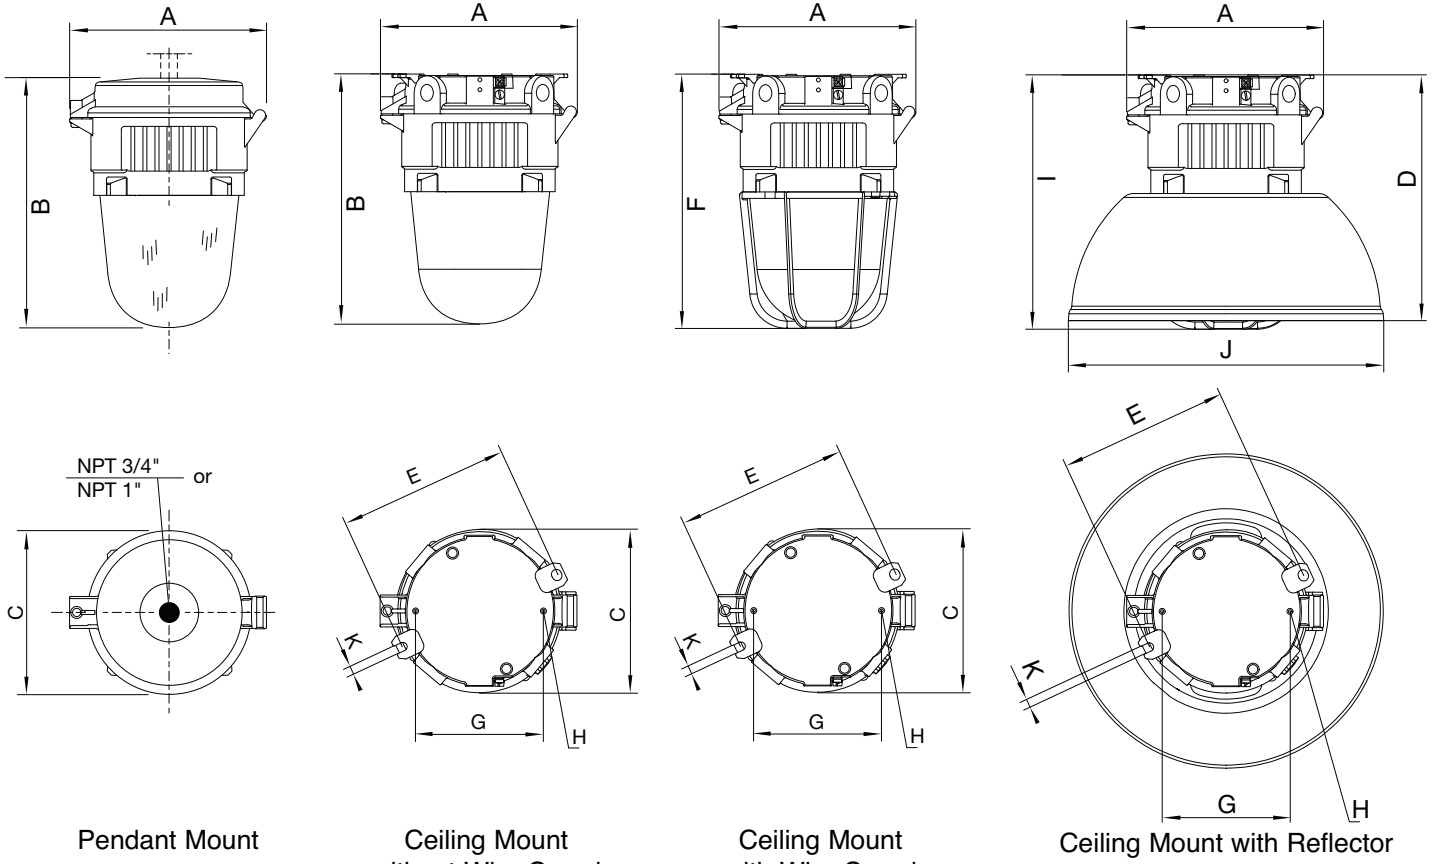


Pendant Mount

Ceiling Mount without Wire Guard

Ceiling Mount with Wire Guard


Ceiling Mount with Reflector

Dimensions in mm / inches			
Callouts	6480 / 11	6480 / 12	6480 / 13
A	227 / 8.94	227 / 8.94	372 / 14.65
B	352 / 13.86	414 / 16.30	514 / 20.24
B1	350 / 13.78	412 / 16.22	517 / 20.35
C	230 / 9.06 O.D.	230 / 9.06 O.D.	310 / 12.20 O.D.
D	353 / 13.90	353 / 13.90	521 / 20.51
E	240 / 9.45	240 / 9.45	329 / 12.95
F	357 / 14.06	423 / 16.65	533 / 20.98
G	180 / 7.09	180 / 7.09	260 / 10.24
H	M 8	M 8	M 10
I	358 / 14.09	424 / 16.96	535 / 21.06
J	444 / 17.48 O.D.	444 / 17.48 O.D.	715 / 28.15 O.D.
K	12 / 0.47	12 / 0.47	12 / 0.47
L	431 / 16.97	431 / 16.97	N/A
M	446 / 17.56 O.D.	446 / 17.56 O.D.	N/A
N	470 / 18.50	470 / 18.50	N/A

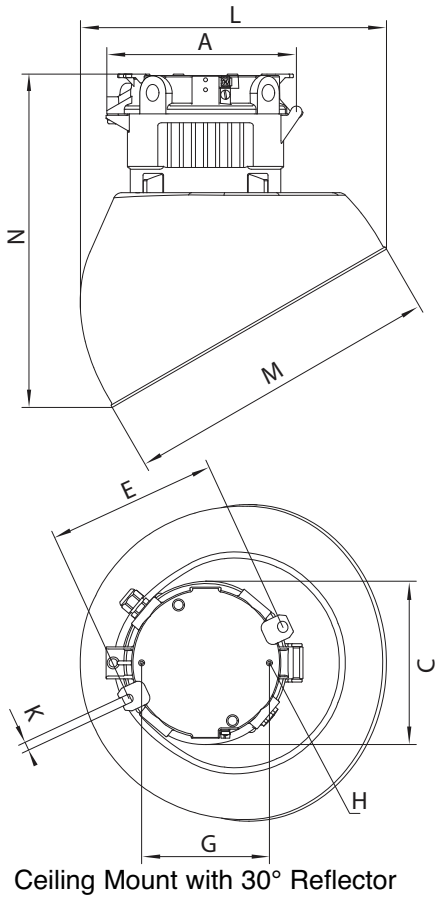

Ceiling Mount with 30° Reflector



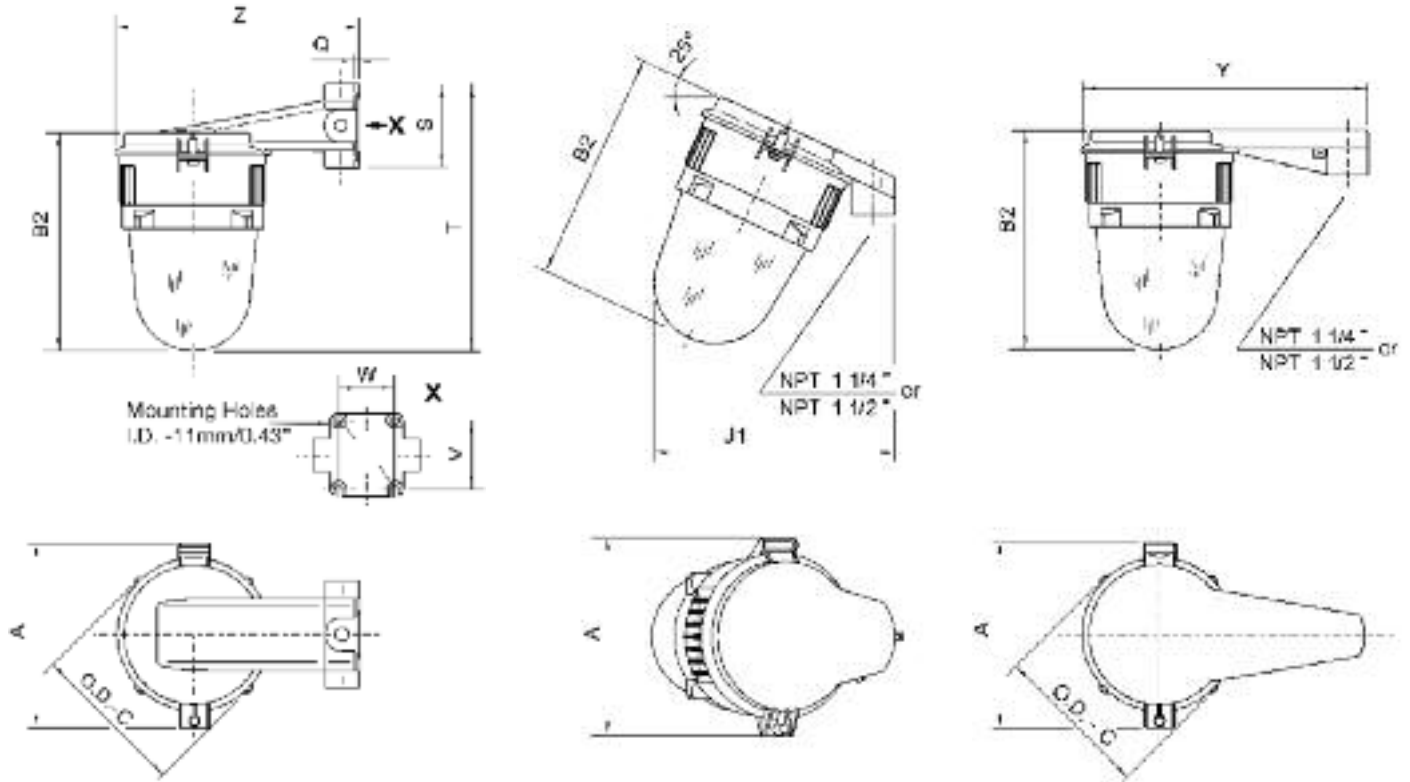

Wall Mount

Stanchion Mount  
25° Angle

Stanchion Mount  
Straight

Dimensions in mm / inches			
Callouts	6480 / 11	6480 / 12	6480 / 13
A	227 / 8.94	227 / 8.94	372 / 14.65
B2	331 / 13.03	393 / 15.47	498 / 19.61
C	230 / 9.06	230 / 9.06	310 / 12.20
J1	340 / 13.39	367 / 14.45	511 / 20.12
Q	7 / 0.28	7 / 0.28	8 / 0.32
R	250 / 9.84	250 / 9.84	422 / 16.61
S	105 / 4.13	125 / 4.92	160 / 6.30
T	405 / 15.94	466 / 18.35	592 / 23.31
V	105 / 4.13	105 / 4.13	139 / 5.47
W	85 / 3.35	85 / 3.35	85 / 3.35
Y	427 / 16.81	427 / 16.81	628 / 24.72
Z	366.5 / 14.43	366.5 / 14.43	579 / 22.80



### CLASSIFICATIONS

NEC- Class I, Zones 1 & 2, AEx de IIC T6  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Division 2, Groups F,G  
 Class III



FILE No. E182378

CEC- Class I, Zones 1 & 2 Ex de IIC T6  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III



FILE No. LR99480

Type 3, 4 & 4X; IP66

### HOUSING MATERIAL

Fiberglass Reinforced Polyester (FRP)  
 with recessed gasket.

### Application

The 8040/73 Series of light switches are 16 Amp rotary switches that come in either ON-OFF or as THREE-WAY types to switch lighting circuits from two different locations.

There is also the 8040/84 Series available with a two-gang enclosure which allows for one conduit run and **two** of the above mentioned switches.

### Technical Data

	NEC/CEC
Rated Voltage	600V
Rated Current	16A
Mechanical Life	≥ 10 <sup>5</sup> Operations
Electrical Life	≥ 10 <sup>5</sup> Operations
Terminals	12AWG

### Ordering Information - 1 Gang



Switch Description	Catalog Number	
	3/4" NPT Bottom Feed	3/4" NPT Top Feed
ON-OFF	8040/734-L12601	8040/733-L12601
THREE-WAY	8040/734-L12610	8040/733-L12610

For Feed Through, change Catalog Number to 8040/735-L126\*\*

### Ordering Information - 2 Gang

Switch Description	Catalog Number	
	3/4" NPT Bottom Feed	3/4" NPT Top Feed
ON-OFF ON-OFF	8040/844-L12601 -L12601	8040/843-L12601 -L12601
THREE-WAY THREE-WAY	8040/844-L12610 -L12610	8040/843-L12610 -L12610
ON-OFF THREE-WAY	8040/844-L12601 -L12610	8040/843-L12601 -L12610



For Feed Through, change Catalog Number to 8040/845-L126\*\*



# 8150 Series Terminal Boxes



## TERMINATION



### Ready-Term<sup>®</sup>

#### 8150 Terminal Boxes Features

- Enclosures made of stainless steel, brushed finished (AISI 304) or (AISI 316L)
- Optional hinges with cam locks or screws cover
- Hinged Versions 130° opening angle
- -60°C to +70°C Ambient temperature Standard Range
- Circumferential protection channel prevents water entry
- External Grounded connection
- Flange plate screwed on from the outside enables simple installation
- Degree of protection IP66
- Complete Global Certifications including IECEx, ATEX, NEC & CEC (Class 1, Division2) INMETRO, GOST

**Explosion Protection**

**Marking**

<p>Version IECEX Gas Explosion Protection</p>	<p>8150/1 Ex db eb ia/ib mb IIA, IIB, IIC T6 (Ta= -60...+40 °C) Ex db eb ia/ib mb IIA, IIB, IIC T5 (Ta= -60...+55 °C) Ex db eb ia/ib mb IIA, IIB, IIC T4 (Ta= -60...+70 °C)</p>	<p>8150/2 (for IS Circuits) Ex ia/ib IIA, IIB, IIC T6 (Ta= -60...+75 °C)</p>
<p>Dust Explosion Protection</p>	<p>Ex tb IIIC IP66 T80 °C (Ta= -60...+40 °C) Ex tb IIIC IP66 T95 °C (Ta= -60...+55 °C) Ex tb IIIC IP66 T130 °C (Ta= -60...+70 °C)</p>	<p>Ex tb IIIC IP66 T80°C (Ta= -60...+40 °C)</p>
<p>Europe (ATEX) Gas Explosion Protection</p>	<p> II 2 G Ex db eb ia/ib mb IIA, IIB, IIC T6 (Ta= -60...+40 °C)  II 2 G Ex db eb ia/ib mb IIA, IIB, IIC T5 (Ta= -60...+55 °C)  II 2 G Ex db eb ia/ib mb IIA, IIB, IIC T4 (Ta= -60...+70 °C)</p>	<p> II 2 G Ex ia/ib IIA, IIB, IIC T6 (Ta= -60...+75 °C)</p>
<p>Dust Explosion Protection</p>	<p> II 2 D Ex tb IIIC IP66 T80°C (Ta= -60...+40°C)  II 2 D Ex tb IIIC IP66 T95°C (Ta= -60...+55°C)  II 2 D Ex tb IIIC IP66 T130°C (Ta= -60...+70°C)</p>	<p> II 2 D Ex tb IIIC IP66 T80°C(Ta= -60...+40 °C)</p>
<p><b>USA</b> <b>Gas Explosion Protection</b></p> <p>Class 1, Zone 1 AEx e IIC (T.*) Class 1, Zone 1 AEx de IIC (T.*) Class 1, Division 2, Groups ABCD -60°C to +40°C(T6)* -60°C to +55°C(T5)* -60°C to +85°C(T4)* IP54 (with breather) IP66 (without breather) Enclosure Type 3,4,4X</p>	<p><b>Canada</b> <b>Gas explosion protection</b></p> <p>Class 1, Zone 1 Ex e IIC (T.*) Class 1, Zone 1 Ex de IIC (T.*) Class 1, Division 2, Groups ABCD -60°C to +40°C(T6)* -60°C to +55°C(T5)* -60°C to +85°C(T4)* IP54 (with breather) IP66 (without breather) Enclosure Type 3,4,4X</p>	<p><b>Certificates</b></p> <p><b>IECEX</b> <b>IECEX PTB 09.0048</b></p> <p><b>Europe-ATEX</b> <b>PTB 09 ATEX 1108</b></p> <p><b>USA/Canada</b> <b>File #E177642</b></p>

**Technical Data**

<p>Electrical Data</p> <p>Rated Operation Voltage</p> <p>Rated Operation Current</p>	<p>Max. 1100 V depending on terminal types and explosion protected components</p> <p>used</p>
<p>Ambient Conditions</p> <p>Ambient Temperature</p>	<p>Max. 630 A depending on terminal types and explosion protected components used</p>
<p>Mechanical Data</p> <p>Environmental Protection</p> <p>Material</p> <p>Enclosure</p> <p>Gaskets</p> <p>Mounting Plate</p> <p>Cover Options</p> <p>Flange Plate</p> <p>Standard Version</p> <p>Special Version</p> <p>Wall Thickness</p> <p>Enclosure Cover</p> <p>Mounting Plate</p> <p>Cover screws tightening torque</p> <p>Extrenal Connection</p> <p>Wire Size</p>	<p>See explosion protection data depending on terminal types and explosion protected components used</p> <p>IP66 acc. to IEC/EN 60529</p> <p>-stainless steel (AISI 304) respectively (AISI 316L) brush finish</p> <p>Silicone foamed</p> <p>sheet steel, galvanized</p> <p>-with captive M6 stainless steel combo head screws or</p> <p>-with hinges/ cam locks</p> <p>Double-bit key no.5 for cam lock included</p> <p>without flange plate</p> <p>with flange plate</p> <p>(1.5mm)</p> <p>min-14 ga (2mm)</p> <p>3mm2</p> <p>4.5 Nm</p> <p>M8 hex screw</p> <p>Max. 600 kc mil (300mm2) depending on terminal types and explosion protected components used</p>

## ADVANTAGES OF THE SERIES 8150




The new form of the edges allows quick water drainage and prevents water from accumulating around the gasket. This solution helps to increase the safety inside the enclosure.



The flange plate mounted from the outside is another advantage of this enclosure: This guarantees a perfect accessibility - even if the cables are already built-in.



The large beam width allows you a comfortable access and an easy and fast handling.



If a regular access is required, the version equipped with a sash lock (or a hinge) is recommended.



The enclosure comes with an external ground connection.

### Preselection table:

8150/ a - bbbb - cccc - ddd - e f g h - i jjj - kk L			
a		Example 8150/1-0400-0300-230-2311-a012-fpabc	
1 = Ex e or Ex e ia/ib or AEx 2 = Ex i		Description 400x300x230, 304sst, no hinge, with (12) 2.5mm terminals, flange plates on sides A, B, C	
<b>bbbb (inches)</b>	<b>ddd (depth) (inches)</b>	<b>i</b>	
0176 mm (6.93)	091 mm (3.58)	a = 2.5mm <sup>2</sup> terminal (26-12)	
0236 mm (9.39)	150 mm (5.91)	b = 4mm <sup>2</sup> terminal (26-10)	
0300 mm (11.81)	190 mm (7.48)	c = 6mm <sup>2</sup> terminal (24-8)	
0360 mm (14.17)	230 mm (9.06)	d = 10mm <sup>2</sup> terminal (20-6)	
0400 mm (15.75)		e = 16mm <sup>2</sup> terminal (16-4)	
0550 mm (21.65)		f = 35mm <sup>2</sup> terminal (14-1/0)	
0600 mm (23.62)	<b>e (material)</b>	<b>jjj</b>	
0727 mm (28.62)	2 = 304 SST	# of terminals (ie. 012 = 12 terminals)	
0787 mm (30.98)	3 = 316L SST		
<b>cccc (height) (inches)</b>	<b>f (surface)</b>	<b>kk</b>	
0166 mm (4.57)	3 = brushed	FP = Flange Plate (optional)	
0176 mm (6.92)	<b>g (cover attachment)</b>	<b>L</b>	
0200 mm (7.87)	1 = screws only	A = Flange Plate Side A	
0360 mm (14.17)	2 = cover with hinge and sash lock	B = Flange Plate Side B	
0300 mm (11.81)		C = Flange Plate Side C	
0400 mm (15.75)	<b>h = 1 always</b>	D = Flange Plate Side D	
0600 mm (23.62)			

## SCREW COVER ENCLOSURES

Catalog Number	Width E mm (inches)	Height F mm (inches)	Depth G mm (inches)	H mm (inches)	a1 mm (inches)	a2 mm (inches)	b1 mm (inches)	b2 mm (inches)	c1 mm (inches)	c2 mm (inches)
8150/-0176-0116-091-3311	176.5 (6.93)	116.5 (4.59)	91 (3.58)	106 (4.17)	136 (5.35)	76 (2.99)	212 (5.98)	152 (5.98)	228 (8.98)	168 (6.61)
8150/-0176-0176-091-3311	176.5 (6.93)	176.5 (6.93)	91(3.58)	106 (4.17)	136 (5.35)	136 (5.35)	212 (5.98)	212 (5.98)	228 (8.98)	228 (8.98)
8150/-0236-0176-091-3311	236.5 (9.29)	176.5 (6.93)	91 (3.58)	106 (4.17)	196 (7.72)	136 (5.35)	272 (10.71)	212 (8.35)	288 (11.34)	228 (8.98)
8150/-0236-0176-150-3311	236.5 (9.29)	176.5 (6.93)	150 (5.91)	165 (6.50)	196 (7.72)	136 (5.35)	272 (10.71)	212 (5.98)	288 (11.34)	228 (8.98)
8150/-0300-0200-150-3311	300 (11.81)	200 (7.87)	150 (5.91)	165 (6.50)	260 (10.42)	160 (6.29)	336 (13.22)	236 (9.29)	352 (13.66)	252 (9.22)
8150/-0360-0176-091-3311	360 (14.17)	176.5 (6.93)	91 (3.58)	106 (4.17)	320 (12.6)	136 (5.35)	396 (15.59)	212 (8.35)	412 (16.22)	228 (8.98)
8150/-0360-0176-150-3311	360 (14.17)	176.5 (6.93)	150 (5.91)	165 (6.50)	320 (12.6)	136 (5.35)	396 (15.59)	212 (8.35)	412 (16.22)	228 (8.98)
8150/-0360-0360-091-3311	360 (14.17)	360 (14.17)	91 (3.58)	106 (4.17)	320 (12.6)	320 (12.6)	396 (15.59)	396 (15.59)	412 (16.22)	412 (16.22)
8150/-0360-0360-150-3311	360 (14.17)	360 (14.17)	150 (5.91)	165 (6.50)	320 (12.6)	320 (12.6)	396 (15.59)	396 (15.59)	412 (16.22)	412 (16.22)
8150/-0360-0360-190-3311	360 (14.17)	360 (14.17)	190 (7.48)	205 (8.07)	320 (12.6)	320 (12.6)	396 (15.59)	396 (15.59)	412 (16.22)	412 (16.22)
8150/-0360-0360-230-3311	360 (14.17)	360 (14.17)	230 (9.05)	245 (9.65)	320 (12.6)	320 (12.6)	396 (15.59)	396 (15.59)	412 (16.22)	412 (16.22)
8150/-0400-0300-150-3311	400 (15.75)	300 (11.81)	150 (5.91)	165 (6.50)	360 (14.17)	260 (10.24)	436 (17.17)	336 (13.23)	452 (17.8)	352 (13.86)
8150/-0400-0300-230-3311	400 (15.75)	300 (11.81)	230 (9.05)	245 (9.65)	360 (14.17)	260 (10.24)	436 (17.17)	336 (13.23)	452 (17.8)	352 (13.86)
8150/-0400-0400-150-3311	400 (15.75)	400 (15.75)	150 (5.91)	165 (6.50)	360 (14.17)	260 (10.24)	436 (17.17)	336 (13.23)	452 (17.8)	352 (13.86)
8150/-0400-0400-230-3311	400 (15.75)	400 (15.75)	230 (9.05)	245 (9.65)	360 (14.17)	360 (14.17)	436 (17.17)	436 (17.17)	452 (17.8)	452 (17.8)
8150/-0550-0360-230-3311	550 (21.65)	360 (14.17)	230 (9.05)	245 (9.65)	510 (20.08)	320 (12.6)	586 (23.07)	396(15.59)	602 (23.7)	412 (16.22)
8150/-0600-0400-150-3311	600 (23.62)	400 (15.75)	150 (5.91)	165 (6.50)	560 (22.05)	360 (14.17)	636 (25.04)	436 (17.17)	652 (25.67)	452 (17.8)
8150/-0600-0400-230-3311	600 (23.62)	400 (15.75)	230 (9.05)	245 (9.65)	510 (20.08)	320 (12.6)	586 (23.07)	396(15.59)	602 (23.7)	412 (16.22)
8150/-0600-0600-150-3311	600 (23.62)	600 (23.62)	150 (5.91)	165 (6.50)	560 (22.05)	560 (22.05)	636 (25.04)	636 (25.04)	652 (25.67)	652 (25.67)
8150/-0600-0600-230-3311	600 (23.62)	600 (23.62)	230 (9.05)	245 (9.65)	560 (22.05)	560 (22.05)	636 (25.04)	636 (25.04)	652 (25.67)	652 (25.67)
8150/-0727-0360-091-3311	727 (28.62)	360 (14.17)	91 (3.58)	106 (4.17)	687 (27.05)	320 (12.6)	763 (30.04)	396 (15.59)	779 (30.67)	412 (16.22)
8150/-0727-0360-150-3311	727 (28.62)	360 (14.17)	150 (5.91)	165 (6.50)	687 (27.05)	320 (12.6)	763 (30.04)	396 (15.59)	779 (30.67)	412 (16.22)
8150/-0727-0360-190-3311	727 (28.62)	360 (14.17)	190 (7.48)	205 (8.07)	687 (27.05)	320 (12.6)	763 (30.04)	396 (15.59)	779 (30.67)	412 (16.22)
8150/-0787-0480-230-3311	787 (30.98)	480 (18.90)	230 (9.05)	245 (9.65)	747 (29.40)	440 (17.32)	823 (32.40)	516 (20.31)	839 (33.03)	532 (20.95)

All in mm (inches)


Min. overall Dimensions available:

Max. overall Dimensions available:

Width	Height	Depth
100 (3.94)	100 (3.94)	60 (2.36)
1200 (47.24)	2200 (86.61)	800 (31.50)

Note: To specify intrinsically safe terminals, change 8150/2. To change 304 stainless, change "3" to a "2" (ie 3321 to 2321). Custom sizes are available. Contact R. STAHL for more information.

### JUNCTION BOX DIMENSIONAL DATA

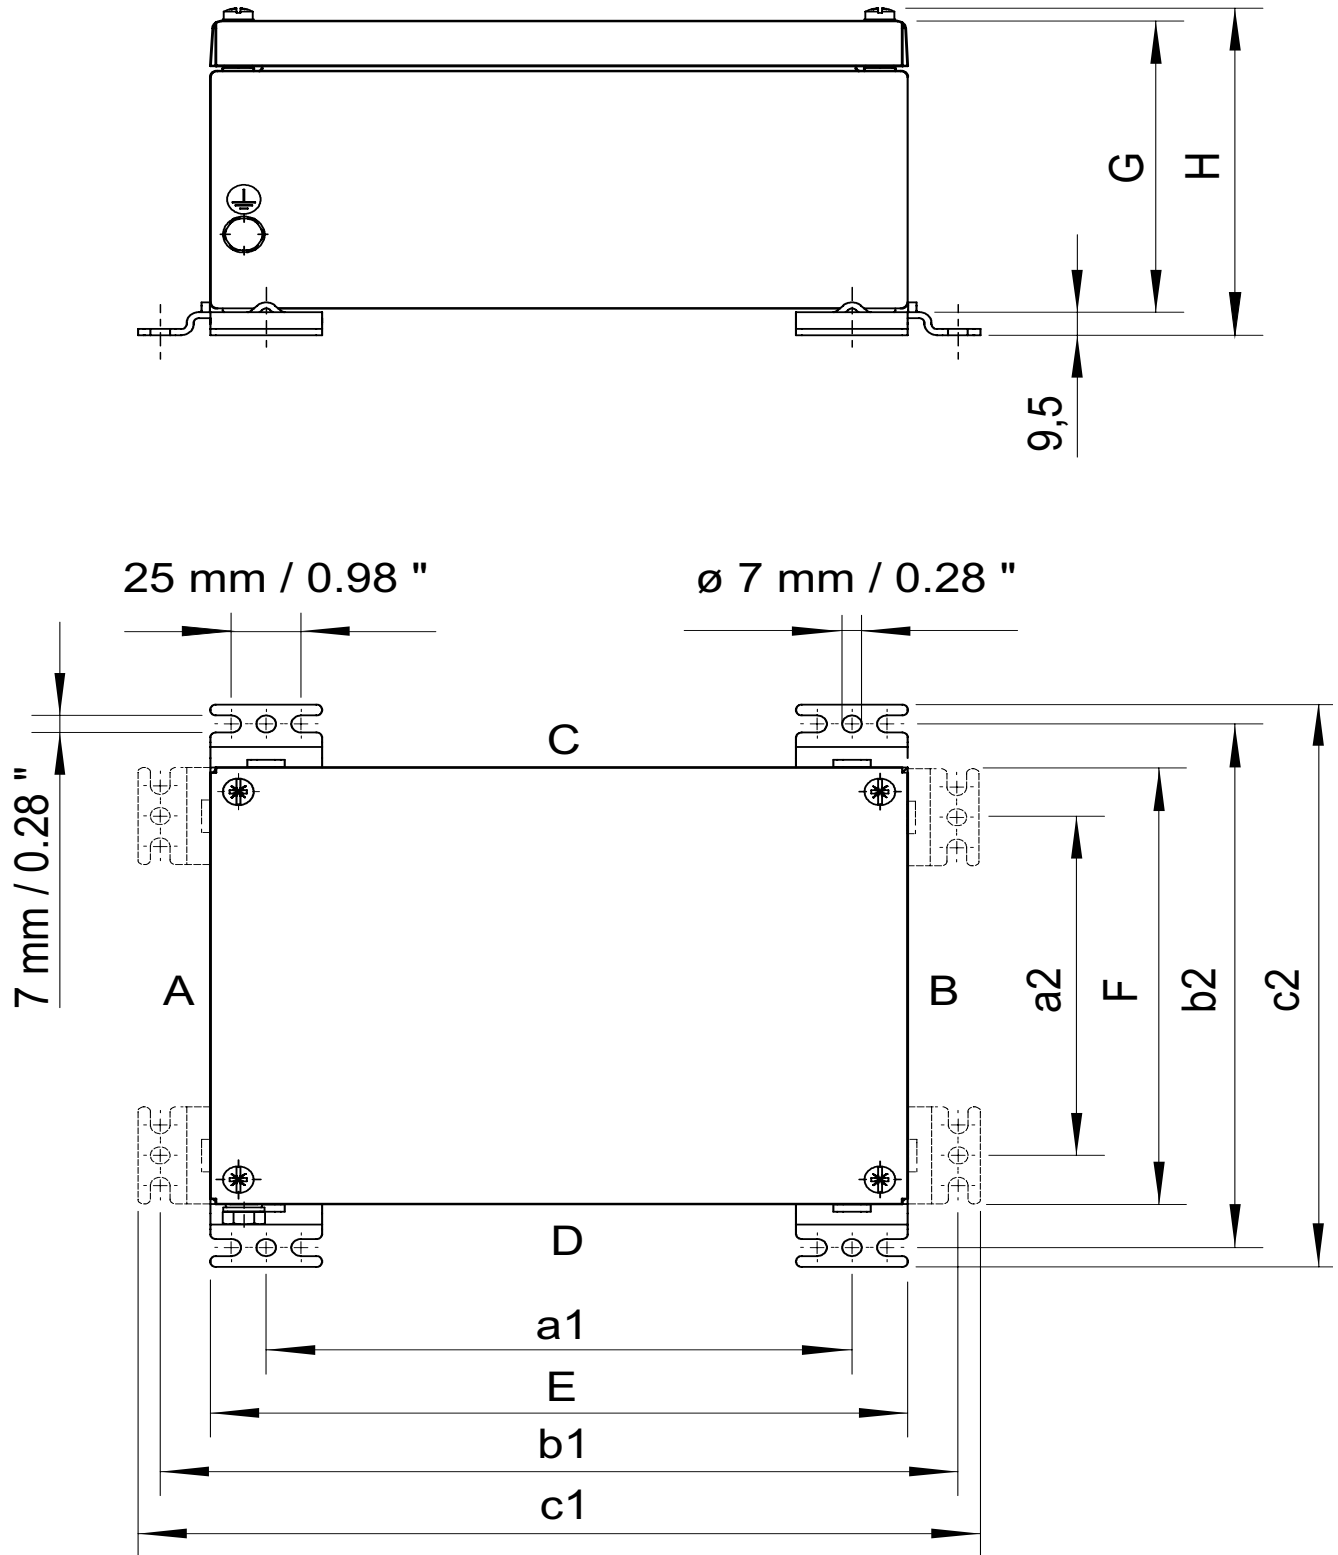

## HINGED ENCLOSURES

Catalog Number	Width E mm (inches)	Height F mm (inches)	Depth G mm (inches)	H mm (inches)	a1 mm (inches)	a2 mm (inches)	b1 mm (inches)	b2 mm (inches)	c1 mm (inches)	c2 mm (inches)
8150/-0176-0360-150-3321	176.5 (6.93)	360 (14.17)	150 (5.91)	165 (6.50)	136 (5.35)	320 (12.6)	212 (5.98)	396 (15.59)	228 (8.98)	412 (16.22)
8150/-0200-0300-150-3321	200 (7.87)	300 (11.81)	150 (5.91)	163.5 (6.44)	160 (6.30)	260 (10.23)	236 (9.29)	336 (13.22)	252 (9.92)	352 (13.86)
8150/-0300-0400-150-3321	300 (11.81)	400 (15.75)	150 (5.91)	165 (6.50)	260 (10.42)	360 (14.17)	336 (13.22)	436 (17.17)	352 (13.86)	452 (17.8)
8150/-0300-0400-230-3321	300 (11.81)	400 (15.75)	230 (9.05)	243.5 (9.59)	260 (10.42)	360 (14.17)	336 (13.22)	436 (17.17)	352 (13.86)	452 (17.8)
8150/-0360-0360-150-3321	360 (14.17)	360 (14.17)	150 (5.91)	163.5 (6.44)	320 (12.6)	320 (12.6)	396 (15.59)	396 (15.59)	412 (16.22)	412 (16.22)
8150/-0360-0360-190-3321	360 (14.17)	360 (14.17)	190 (7.48)	203 (8.01)	320 (12.6)	320 (12.6)	396 (15.59)	396 (15.59)	412 (16.22)	412 (16.22)
8150/-0360-0550-230-3321	360 (14.17)	550 (21.65)	230 (9.05)	243.5 (9.59)	510 (20.08)	320 (12.6)	586 (23.07)	396 (15.59)	602 (23.7)	412 (16.22)
8150/-0360-0727-150-3321	360 (14.17)	727 (28.62)	150 (5.91)	163.5 (6.44)	320 (12.6)	687 (27.05)	398 (15.67)	763 (30.03)	412 (16.22)	779 (30.67)
8150/-0360-0900-230-3321	360 (14.17)	900 (35.43)	230 (9.05)	243.5 (9.59)	320 (12.6)	960 (37.80)	396 (15.59)	936 (36.85)	412 (16.22)	952 (37.48)
8150/-0360-1100-230-3321	360 (14.17)	1100 (43.30)	230 (9.05)	243.5 (9.59)	320 (12.6)	1160 (45.67)	396 (15.59)	1136 (44.72)	412 (16.22)	1152 (45.35)
8150/-0360-1300-230-3321	360 (14.17)	1300 (51.18)	230 (9.05)	243.5 (9.59)	320 (12.6)	1360 (53.54)	396 (15.59)	1336 (52.59)	412 (16.22)	1352 (53.22)
8150/-0400-0400-150-3321	400 (15.75)	400 (15.75)	150 (5.91)	163.5 (6.44)	360 (14.17)	360 (14.17)	436 (17.17)	436 (17.17)	452 (17.8)	452 (17.8)
8150/-0400-0400-230-3321	400 (15.75)	400 (15.75)	230 (9.05)	243.5 (9.59)	360 (14.17)	360 (14.17)	436 (17.17)	436 (17.17)	452 (17.8)	452 (17.8)
8150/-0400-0600-150-3321	400 (15.75)	600 (23.62)	150 (5.91)	163.5 (6.43)	360 (14.17)	360 (14.17)	436 (17.17)	436 (17.17)	452 (17.8)	452 (17.8)
8150/-0400-0600-230-3321	400 (15.75)	600 (23.62)	230 (9.05)	243.5 (9.59)	510 (20.08)	320 (12.6)	586 (23.07)	396 (15.59)	602 (23.7)	412 (16.22)
8150/-0480-0787-230-3321	480 (18.90)	787 (30.98)	230 (9.05)	243.5 (9.59)	747 (29.40)	440 (17.32)	823 (32.40)	516 (20.31)	839 (33.03)	532 (20.94)
8150/-0600-0400-230-3321	600 (23.62)	400 (15.75)	230 (9.05)	243.5 (9.59)	510 (20.08)	320 (12.6)	586 (23.07)	396 (15.59)	602 (23.7)	412 (16.22)
8150/-0600-0600-150-3321	600 (23.62)	600 (23.62)	150 (5.91)	163.5 (6.43)	560 (22.05)	560 (22.05)	636 (25.04)	636 (25.04)	652 (25.67)	652 (25.67)
8150/-0600-0600-230-3321	600 (23.62)	600 (23.62)	230 (9.05)	243.5 (9.59)	560 (22.05)	560 (22.05)	636 (25.04)	636 (25.04)	652 (25.67)	652 (25.67)
8150/-0600-0600-230-3321	600 (23.62)	600 (23.62)	230 (9.05)	243.5 (9.59)	560 (22.05)	560 (22.05)	636 (25.04)	636 (25.04)	652 (25.67)	652 (25.67)
8150/-0800-1000-300-3321	800 (31.50)	1000 (39.37)	300 (11.81)	313.5 (12.34)	860 (33.85)	1060 (41.73)	836 (32.91)	1036 (40.78)	852 (33.54)	1052 (41.41)
8150/-0800-1200-300-3321	800 (31.50)	1200 (47.24)	300 (11.81)	313.5 (12.34)	860 (33.85)	1260 (49.60)	836 (32.91)	1236 (48.66)	852 (33.54)	1252 (49.29)

\*With hinges and cam lock  
All dimensions in mm (inches)

All in mm (inches)



Min. overall Dimensions available:

Max. overall Dimensions available:

Width	Height	Depth
100 (3.94)	100 (3.94)	60 (2.36)
1200 (47.24)	2200 (86.61)	800 (31.50)

Note: To specify intrinsically safe terminals, change 8150/2. To change 304 stainless, change "3" to a "2" (ie 3321 to 2321).  
Custom sizes are available. Contact R. STAHL for more information.

### JUNCTION BOX DIMENSIONAL DATA

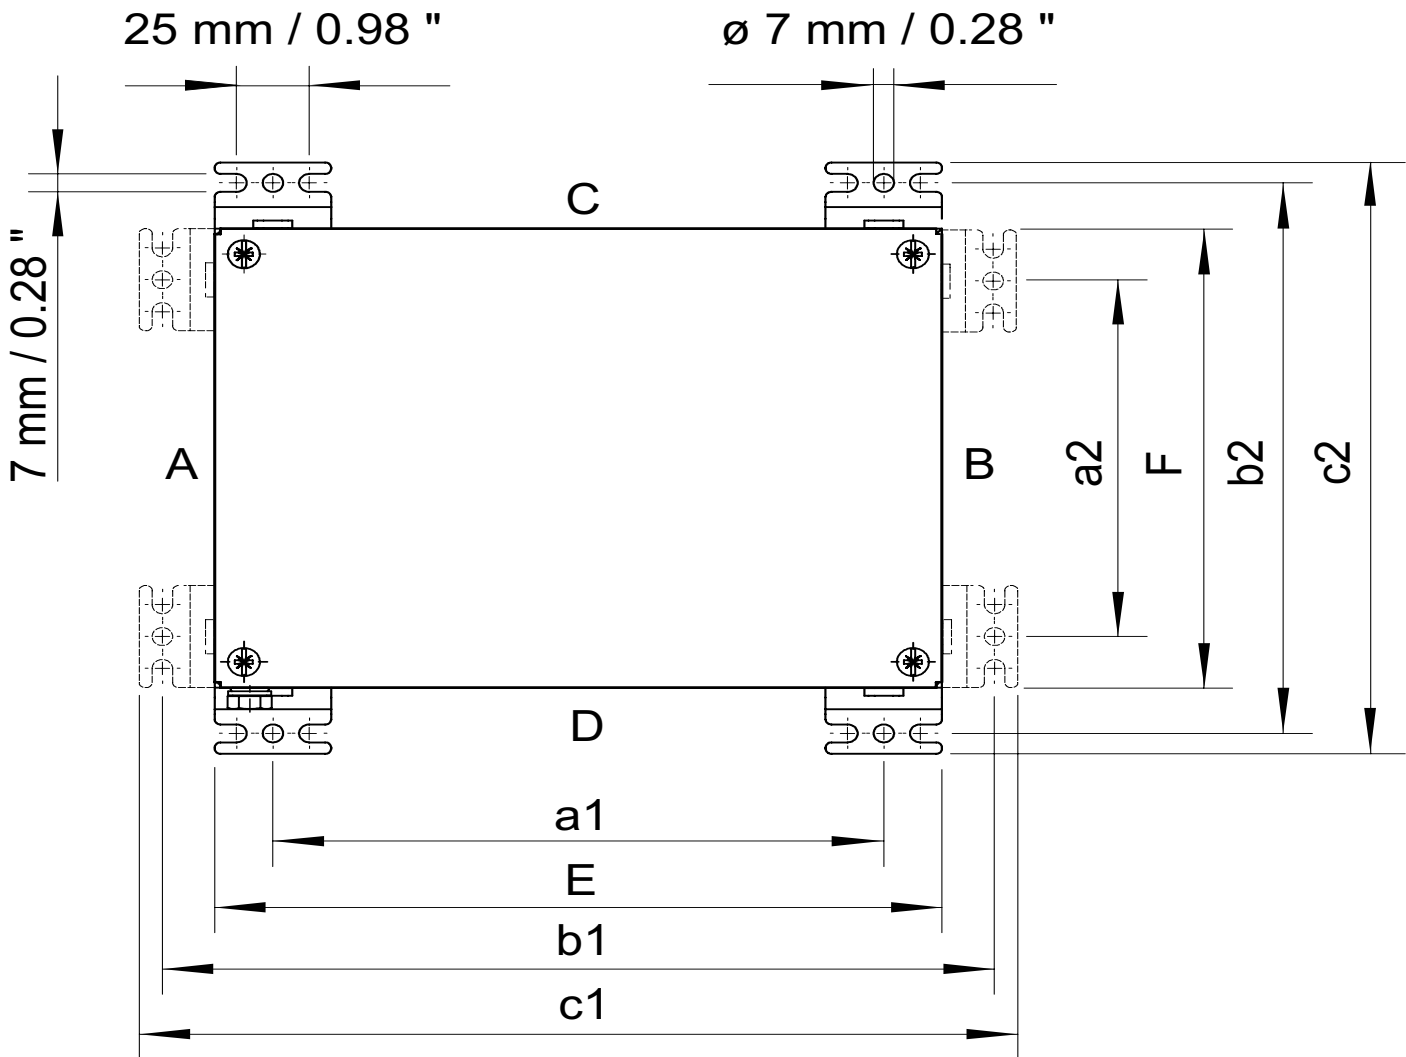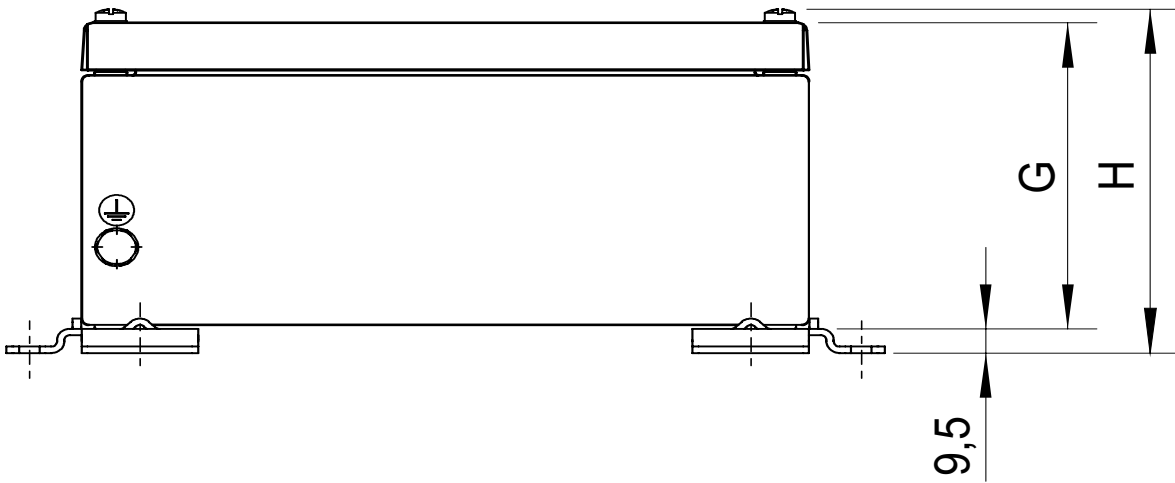

PRESELECTION TABLE: NUMBER OF TERMINALS  
ACCORDING TO THE ENCLOSURE TYPE

Version	Maximum Terminal Quantity Allowed AWG (mm <sup>2</sup> )					Catalog Number
	Number of Rails Required for Max.	26-12 (2.5)	26-10 (4)	24-8 (6)	20-6 (10)	
8150 Terminal Box Series	1	16	13	11	-	8150/-.0176-0116-...-3.1
	2	22	18	15	12	8150/-.0176-0176-...-3.1
	2	36	26	22	20	8150/-.0236-0176-...-3.1
	2	67	56	46	37	8150/-.0360-0176-...-3.1
	4	188	153	124	104	8150/-.0360-0360-...-3.1
	2	105	84	69	33	8150/-.0300-0200-...-3.1
	3	229	185	104	87	8150/-.0400-0300-...-3.1
	4	306	247	150	125	8150/-.0400-0400-...-3.1
	4	443	358	222	183	8150/-.0550-0360-...-3.1
	4	443	358	289	209	8150/-.0727-0360-...-3.1
	4	490	397	250	208	8150/-.0600-0400-...-3.1
	6	735	596	409	339	8150/-.0600-0600-...-3.1
	5	833	539	443	368	8150/-.0787-0480-...-3.1

\* Based on Phoenix Terminals. Other manufacturers may vary, please consult factory for specific information.



METRIC TRADE SIZE MAXIMUM NUMBER OF OPENINGS

Catalog Number Enclosure size 8150/-.....-.....	Flange	Side	Size of the Cable Entry						
			M16 x 1.5	M20 x 1.5	M25 x 1.5	M32 x 1.5	M40 x 1.5	M50 x 1.5	M63 x 1.5
0176-0116-091-3311	Without Flange	A/B	6	4	2	1	1	-	-
		C/D	12	8	4	3	2	-	-
	Flange	A/B	-	-	-	-	-	-	-
		C/D	-	-	-	-	-	-	-
0176-0176-091-3311	Without Flange	A/B	11	8	4	3	2	-	-
		C/D	12	8	4	3	2	-	-
	Flange	A/B	-	-	-	-	-	-	-
		C/D	-	-	-	-	-	-	-
0236-0176-091-3311	Without Flange	A/B	11	8	4	3	2	-	-
		C/D	15	12	6	4	3	-	-
	Flange	A/B	-	-	-	-	-	-	-
		C/D	4	4	2	-	-	-	-
0236-0176-150-3311	Without Flange	A/B	28	17	10	6	4	3	2
		C/D	41	26	16	10	6	4	2
	Flange	A/B	9	6	4	2	1	1	-
		C/D	17	10	7	5	3	2	2
0360-0360-190-3311	Without Flange	A/B	65	42	26	18	12	-	-
		C/D	65	42	26	18	12	-	-
	Flange	A/B	-	-	-	-	-	-	-
		C/D	-	-	-	-	-	-	-
0360-0360-150-3321	Without Flange	A/B	65	42	26	18	10	6	4
		C/D	67	42	26	19	10	6	4
	Flange	A/B	28	18	13	9	5	3	3
		C/D	28	18	13	9	5	3	3
0727-0360-091-3311	Without Flange	A/B	65	42	26	18	10	6	4
		C/D	117	74	46	33	36	22	14
	Flange	A/B	a						
		C/D	a						
0600-0600-230-3321	Without Flange	A/B	187	130	91	63	34	22	14
		C/D	190	131	94	63	36	22	14
	Flange	A/B	110	74	49	31	16	14	10
		C/D	110	74	49	31	16	14	10

A=On request W=Width L=Length D=Depth

Catalog Number Enclosure size 8150/-.....-.....-.....	Flange	Side	Size of the Cable Entry						
			M16 x 1.5	M20 x 1.5	M25 x 1.5	M32 x 1.5	M40 x 1.5	M50 x 1.5	M63 x 1.5
0727-0360-190-3311	Without Flange	D	117	74	46	33	36	22	14
	Flange	A/B	a						
		C/D	a						
0727-0360-150-3331	Without Flange	A/B	65	42	26	18	10	6	4
		C/D	117	74	46	33	36	22	14
	Flange	A/B	a						
		C/D	a						
0727-0360-150-3311	Without Flange	A/B	65	42	26	18	10	6	4
		C/D	117	74	46	33	36	22	14
	Flange	A/B	a						
		C/D	a						
600-0600-230-3311	Without Flange	A/B	187	130	91	63	34	22	14
		C/D	190	131	94	63	36	22	14
	Flange	A/B	110	74	49	31	16	14	10
		C/D	110	74	49	31	16	14	10
550-0360-230-3311	Without Flange	A/B	91	59	43	27	15	9	6
		C/D	123	85	59	38	22	14	9
	Flange	A/B	-	-	-	-	-	-	-
		C/D	-	-	-	-	-	-	-
0400-0400-150-3321	Without Flange	A/B	74	48	29	21	11	7	5
		C/D	74	48	30	22	11	7	5
	Flange	A/B	28	18	13	9	5	3	3
		C/D	28	18	13	9	5	3	3
0400-0400-150-3311	Without Flange	A/B	74	48	29	21	11	7	5
		C/D	74	48	30	22	11	7	5
	Flange	A/B	28	18	13	9	5	3	3
		C/D	28	18	13	9	5	3	3
0400-0300-150-3311	Without Flange	A/B	54	34	21	16	8	5	3
		C/D	74	48	30	22	11	7	5
	Flange	A/B	a						
		C/D	28	18	13	9	5	3	3
8150/1-0360-0360-230-3311	Without Flange	A/B	91	59	43	27	15	-	-
		C/D	91	59	43	27	15	-	-
	Flange	A/B	-	-	-	-	-	-	-
		C/D	-	-	-	-	-	-	-

A=On request W=Width L=Length D=Depth

METRIC TRADE SIZE MAXIMUM NUMBER OF OPENINGS

Catalog Number Enclosure size 8150/-.....-.....-.....	Flange	Side	Size of the Cable Entry						
			M16 x 1.5	M20 x 1.5	M25 x 1.5	M32 x 1.5	M40 x 1.5	M50 x 1.5	M63 x 1.5
0360-0360-190-3321	Without Flange	A/B	65	42	26	18	10	-	-
		C/D	65	42	26	18	10	-	-
	Flange	A/B	-	-	-	-	-	-	-
		C/D	-	-	-	-	-	-	-
0360-0360-150-3311	Without Flange	A/B	65	42	26	18	10	6	4
		C/D	67	42	26	19	10	6	4
	Flange	A/B	28	18	13	9	5	3	3
		C/D	28	18	13	9	5	3	3
0360-0360-091-3311	Without Flange	A/B	27	20	10	7	5	-	-
		C/D	28	20	10	7	5	-	-
	Flange	A/B	-	-	-	-	-	-	-
		C/D	9	6	6	-	-	-	-
0360-0176-150-3311	Without Flange	A/B	28	17	10	6	4	3	2
		C/D	67	42	26	19	10	6	4
	Flange	A/B	9	6	4	2	1	1	-
		C/D	28	18	13	9	5	3	3
0360-0176-091-3311	Without Flange	A/B	11	8	4	3	2	-	-
		C/D	27	20	10	7	5	-	-
	Flange	A/B	-	-	-	-	-	-	-
		C/D	9	6	6	-	-	-	-
0600-0400-150-3321	Without Flange	A/B	74	48	30	22	11	7	5
		C/D	117	74	46	33	18	11	7
	Flange	A/B	28	18	13	9	5	3	3
		C/D	47	31	21	15	8	5	5
0400-0600-150-3321	Without Flange	A/B	117	74	46	33	18	11	7
		C/D	74	48	30	22	11	7	5
	Flange	A/B	47	31	21	15	8	5	5
		C/D	28	18	13	9	5	3	3
0600-0600-3321	Without Flange	A/B	116	73	45	33	18	11	7
		C/D	117	74	46	33	18	11	7
	Flange	A/B	47	31	21	15	8	5	5
		C/D	47	31	21	15	8	5	5
8150/1-0176-0360-150-3321	Without Flange	A/B	67	42	26	19	10	6	4
		C	28	17	10	6	4	3	2

A=On request W=Width L=Length D=Depth

Catalog Number Enclosure size 8150/-.....-.....-.....	Flange	Side	Size of the Cable Entry						
			M16 x 1.5	M20 x 1.5	M25 x 1.5	M32 x 1.5	M40 x 1.5	M50 x 1.5	M63 x 1.5
0176-0360-150-3321	Without Flange	D	28	17	10	6	4	3	2
	Flange	A/B	28	18	13	9	5	3	3
		C/D	9	6	4	2	1	1	-
0300-0400-230-3321	Without Flange	A/B	123	85	60	39	22	14	9
		C/D	91	59	43	27	15	9	6
	Flange	A/B	69	44	28	20	10	8	6
		C/D	a						
0400-0300-230-3321	Without Flange	A/B	91	59	43	27	15	9	6
		C/D	123	85	60	39	22	14	9
	Flange	A/B	a						
		C/D	69	44	28	20	10	8	6
0400-0400-230-3321	Without Flange	A/B	123	85	59	38	22	14	9
		C/D	123	85	60	39	22	14	9
	Flange	A/B	69	44	28	20	10	8	6
		C/D	69	44	28	20	10	8	6
0400-0600-230-3321	Without Flange	A/B	187	130	91	63	34	22	14
		C/D	123	85	60	39	22	14	9
	Flange	A/B	110	74	49	31	16	14	10
		C/D	69	44	28	20	10	8	6
0600-0400-230-3321	Without Flange	A/B	123	85	60	39	22	14	9
		C/D	187	130	91	63	34	22	14
	Flange	A/B	69	44	28	20	10	8	6
		C/D	110	74	49	31	16	14	10
0360-0550-230-3321	Without Flange	A/B	123	85	59	38	22	14	9
		C/D	91	59	43	27	15	9	6
	Flange	A/B	a						
		C/D	a						
0480-0787-230-3321	Without Flange	A/B	190	131	94	63	36	22	14
		C/D	117	74	46	33	36	22	14
	Flange	A/B	a						
		C/D	47	31	21	15	8	5	5
0787-0480-230-3321	Without Flange	A/B	117	74	46	33	36	22	14
		C/D	190	131	94	63	36	22	14
	Flange	A/B	47	31	21	15	8	5	5
		C/D	a						

A=On request W=Width L=Length D=Depth

# Ready-Term® 8150 Terminal Boxes

**TERMINATION**


NPT TRADE SIZE MAXIMUM NUMBER OF OPENINGS

Enclosure size 8150/-.....-.....-.....	Without flange top and bottom side								Without flange left and right side							
	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"
0176-0116-091-..1	3	3	2	0	0	0	0	0	2	1	1	0	0	0	0	0
0176-0360-150-..2	6	6	4	2	1	1	1	0	14	12	10	4	4	3	3	0
0200-0300-150-..2	6	6	6	2	2	1	1	0	12	10	8	4	3	2	2	0
0236-0176-091-..1	4	4	3	0	0	0	0	0	3	3	2	0	0	0	0	0
0236-0176-150-..1	8	8	6	3	2	2	2	0	6	6	4	2	1	1	1	0
0300-0200-150-..1	12	10	8	4	3	2	2	0	6	6	6	2	2	1	1	0
0300-0400-150-..2	12	10	8	4	3	2	2	0	16	14	12	5	4	4	3	0
0300-0400-230-..2	24	20	12	8	6	4	2	2	32	28	18	10	8	8	3	3
0360-0176-091-..1	7	6	5	0	0	0	0	0	3	3	2	0	0	0	0	0
0360-0176-150-..1	14	12	10	4	4	3	3	0	6	6	4	2	1	1	1	0
0360-0360-091-..1	7	6	5	0	0	0	0	0	7	6	5	0	0	0	0	0
0360-0360-150-..1	14	12	10	4	4	3	3	0	14	12	10	4	4	3	3	0
0360-0360-190-..1	21	18	10	8	8	3	3	2	21	18	10	8	8	3	3	2
0360-0360-190-..2	21	18	10	8	8	3	3	2	21	18	10	8	8	3	3	2
0360-0360-230-..1	28	24	15	8	8	6	3	2	28	24	15	8	8	6	3	2
0360-0550-230-..2	28	24	15	8	8	6	3	2	44	40	24	14	12	10	5	4
0360-0727-150-..2	14	12	10	4	4	3	3	0	30	28	22	10	8	7	6	0
0400-0300-150-..1	16	14	12	5	4	4	3	0	12	10	8	4	3	2	2	0
0400-0300-230-..1	32	28	18	10	8	8	3	3	24	20	12	8	6	4	2	2
0400-0400-150-..1	16	14	12	5	4	4	3	0	16	14	12	5	4	4	3	0
0400-0400-150-..2	16	14	12	5	4	4	3	0	16	14	12	5	4	4	3	0
0400-0400-230-..1	32	28	18	10	8	8	3	3	32	28	18	10	8	8	3	3
0400-0600-150-..2	16	14	12	5	4	4	3	0	24	22	18	8	7	6	5	0
0400-0600-230-..2	32	28	18	10	8	8	3	3	48	44	27	16	14	12	5	4
0480-0787-230-..2	40	36	21	12	10	8	4	3	64	60	39	20	18	16	7	6
0550-0360-230-..1	44	40	24	14	12	10	5	4	28	24	15	8	8	6	3	2
0600-0400-150-..1	24	22	18	8	7	6	5	0	16	14	12	5	4	4	3	0
0600-0400-230-..1	48	44	27	16	14	12	5	4	32	28	18	10	8	8	3	3
0600-0600-150-..1	24	22	18	8	7	6	5	0	24	22	18	8	7	6	5	0
0600-0600-230-..1	48	44	27	16	14	12	5	4	48	44	27	16	14	12	5	4
0727-0360-091-..1	15	14	11	0	0	0	0	0	7	6	5	0	0	0	0	0
0727-0360-150-..1	30	28	22	10	8	7	6	0	14	12	10	4	4	3	3	0
0727-0360-150-..1	30	28	22	10	8	7	6	0	14	12	10	4	4	3	3	0
0727-0360-190-..1	45	42	22	20	16	7	6	5	21	18	10	8	8	3	3	2
0727-0360-190-..1	45	42	22	20	16	7	6	5	21	18	10	8	8	3	3	2
0787-0480-230-..1	64	60	39	20	18	16	7	6	40	36	21	12	10	8	4	3
0787-0480-230-..1	64	60	39	20	18	16	7	6	40	36	21	12	10	8	4	3

Note: For Maximum trade size and Number of openings with flange plate, please consult factory.



INNOVATIVE EXPLOSION PROTECTION by R. STAHL 1-800-782-4357

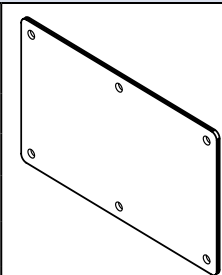Accessories and Spare Parts								
	Catalog Number	Depth mm (inches)	Sheet thickness mm (inches)	Material				
				Side A/B		Side C/D		
				304	316L	304	316L	
<b>Flanges</b> 	8150--0176-0116-...-3.1	91 (3.58)	-	-	-	-	-	-
	8150/-0176-0176-...-3.1	91 (3.58)	-	a	a	a	a	a
	8150/-0236-0176-...-3.1	91 (3.58)	3 (0.12)	202965	202966	a	a	a
			5 (0.20)	202967	202968	a	a	a
	8150--0360-0176-...-3.1	91 (3.58)	3 (0.12)	202961	202962	a	a	a
			5 (0.20)	202963	202964	a	a	a
		150 (5.91)	3 (0.12)	202892	202893	202885	202866	
			5 (0.20)	202894	202895	202887	202888	
	8150--0360-0360-...-3.1	91 (3.58)	3 (0.12)	202961	202962	202961	202962	
			5 (0.20)	202963	202964	202963	202964	
		150 (5.91)	3 (0.12)	202892	202893	202892	202893	
			5 (0.20)	202894	202895	202894	202895	
		190 (7.48)	3 (0.12)	a	a	a	a	
			5 (0.20)	a	a	a	a	
	8150--0400-0300-...-3.1	150 (5.91)	3 (0.12)	202892	202893	a	a	
			5 (0.20)	202894	202895	a	a	
		230 (9.06)	3 (0.12)	202896	202897	a	a	
			5 (0.20)	202898	202899	a	a	
	8150--0400-0400-...-3.1	150 (5.91)	3 (0.12)	202892	202893	202892	202893	
			5 (0.20)	202894	202895	202894	202895	
		230 (9.06)	3 (0.12)	202896	202897	202896	202897	
			5 (0.20)	202898	202899	202898	202899	
	8150--0550-0360-...-3.1	230 (9.06)	3 (0.12)	202900	202901	202896	202897	
			5 (0.20)	202902	202903	202898	202899	
	8150--0600-0400-...-3.1	230 (9.06)	3 (0.12)	202900		202896	202893	
			5 (0.20)	202902	202901	202898	202895	
	8150--0727-0360-...-3.1	150 (5.91)	3 (0.12)	a	a	202892	202905	
			5 (0.20)	a	a	202894	202907	
8150--0600-0600-...-3.1	150 (5.91)	3 (0.12)	202904	202905	202904	202901		
		5 (0.20)	202906	202907	202906	202903		
	230 (9.06)	3 (0.12)	202900	2029031	202900	202897		
		5 (0.20)	202902	202903	202902	202899		
8150--0787-0480-...-3.1	230 (9.06)	3 (0.12)	202938	202939	202896	202897		
		5 (0.20)	202940	202941	202898	202899		

a= available upon request

STAHL

### Ready-Term® 8125 Terminal Boxes Features:

- *Pre-Configured with terminals mounted*
- *Materials:  
Stainless Steel or  
Carbon Steel*
- *Six enclosure sizes with  
different depths*
- *For power and control  
circuits*
- *For I.S. circuits with  
blue terminals*
- *Entry hardware  
optional*
- *Field installation  
possible*



PRE-CONFIGURED STAINLESS AND CARBON STEEL TERMINAL BOXES  
WITH PHOENIX TERMINALS



### CLASSIFICATIONS OF 8125/1

NEC- Class I, Zones 1 & 2 AEx e II T6/T5  
Class I, Division 2, Groups A,B,C,D  
Class II, Division 2, Groups F,G  
Class III

#### Types:

stainless steel version  
3, 4 & 4X; IP66,  
carbon steel version, painted  
3 & 4; IP66,

File No. E177642

CEC- Class I, Zones 1 & 2 Ex e II T6/T5  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 1 & 2, Groups E,F,G  
Class III

### CSA ENCLOSURES

stainless steel version  
Types 3, 4 & 4X; IP66  
carbon steel version, painted  
Types 3 & 4; IP66

File No. LR 99480

II 2G Ex e II T6/T5  
II 2G Ex ia/ib IIC T6  
PTB 00 ATEX 3116  
II 2D Ex td A21 IP66, T80°C/T95°C

### IECEX

Ex e II T6/T5  
Ex ia/ib IIC T6  
Ex td T21 IP66 T80°C  
IECEX PTB 06.0060

Max. Voltage 600 AC/DC

### Ambient Temperature Range:

+40°C (+104°F) Max. T6  
+55°C (+131°F) Max. T5  
-20°C (-4°F) Min.

### Special Ambient Temperature Range:\*

+60°C (+140°F) Max.  
-50°C (-58°F) Min.  
\* Consult Factory

### FEATURES

The Ready-Term® 8125 Series of terminal boxes are made of 316 stainless sheet steel or painted carbon steel. They offer a one-source solution to the time-consuming process of providing ready to install terminal boxes for hazardous locations. With its single part number solution, the Ready-Term® 8125 Series eliminates the inconvenience of purchasing the enclosure and individual parts. This Series is supplied with the indicated quantity of individually numbered terminals for each size of enclosure, fully certified and ready to be installed.

### Ordering Information

TERM. QTY.	WIRE RANGE AWG.	TERM. SIZE mm2	MAX. AMPS. PER TERM.	CATALOG NUMBER		CATALOG NUMBER		ENCLOSURE ORIENTATION
				FOR POWER & CONTROL CIRCUITS	GRND. WIRE CONNECTIONS	FOR INTRINSICALLY SAFE CIRCUITS	PA WIRE CONNECTIONS	
15	26-12	2.5	20	8125/1041-2DP-12015*	8	8125/2041-2DP-12015*	8	
18	26-12	2.5	20	8125/1051-2DP-12018	14	8125/2051-2DP-12018	14	
15	26-10	4	30	8125/1051-2DP-10015	14	8125/2051-2DP-10015	14	
9	20-6	10	65	8125/1051-2DP-06009	12	-	-	
24	26-12	2.5	20	8125/1061-2DP-12024	14	8125/2061-2DP-12024	14	
21	26-10	4	30	8125/1061-2DP-10021	14	8125/2061-2DP-10021	14	
9	20-6	10	65	8125/1061-2DP-06009	12	-	-	
45	26-12	2.5	20	8125/1071-2DP-12045	14	8125/2071-2DP-12045	14	
36	26-10	4	30	8125/1071-2DP-10036	14	8125/2071-2DP-10036	14	
24	20-6	10	65	8125/1071-2DP-06024	12	-	-	

To Select Painted Steel Enclosures change 2 to 1  
To Select Weidmuller Terminals change P to W  
For dimensional data see page C44  
\*With Phoenix terminals only

### "Hazardous Location" Conduit Hubs, Mounted

HUB, NPT THREAD SIZE	CATALOG NUMBER
1/2"	8166/11-01-NE m
3/4"	8166/11-02-NE m
1"	8166/11-03-NE m
1 1/4"	8166/11-04-NE m
1 1/2"	8166/11-05-NE m
2"	8166/11-06-NE m
2 1/2"	8166/11-07-NE m
3"	8166/11-08-NE m



# Ready-Term® 8125 Terminal Boxes

PRE-CONFIGURED STAINLESS AND CARBON STEEL TERMINAL BOXES  
WITH PHOENIX TERMINALS

## Ordering Information

TERM. QTY.	WIRE RANGE AWG.	TERM. SIZE mm <sup>2</sup>	MAX. AMPS. PER TERM.	CATALOG NUMBER		ENCLOSURE ORIENTATION		
				FOR POWER & CONTROL CIRCUITS	GRND. WIRE CON-NECTIONS		FOR INTRINSICALLY SAFE CIRCUITS	PA WIRE CON-NECTIONS
45	26-12	2.5	20	8125/1073-ZDP-12045	14	8125/2073-ZDP-12045	14	
36	26-10	4	30	8125/1073-ZDP-10036	14	8125/2073-ZDP-10036	14	
24	20-6	10	65	8125/1073-ZDP-06024	12	-	-	
18	16-4	16	85	8125/1073-ZDP-04018	6	-	-	
12	14-1/0	35	150	8125/1073-ZDP-1/012	6	-	-	
45	26-12	2.5	20	8125/1083-ZDP-12045	36	8125/2083-ZDP-12045	36	
36	26-10	4	30	8125/1083-ZDP-10036	36	8125/2083-ZDP-10036	36	
24	20-6	10	65	8125/1083-ZDP-06024	24	-	-	
18	16-4	16	85	8125/1083-ZDP-04018	6	-	-	
12	14-1/0	35	150	8125/1083-ZDP-1/012	6	-	-	
90	26-12	2.5	20	8125/1083-ZDP-12090	72	8125/2083-ZDP-12090	72	
72	26-10	4	30	8125/1083-ZDP-10072	72	8125/2083-ZDP-10072	72	
48	20-6	10	65	8125/1083-ZDP-06048	48	-	-	
90	26-12	2.5	20	8125/1093-ZDP-12090	72	8125/2093-ZDP-12090	72	
72	26-10	4	30	8125/1093-ZDP-10072	72	8125/2093-ZDP-10072	72	
48	20-6	10	65	8125/1093-ZDP-06048	48	-	-	
36	16-4	16	85	8125/1093-ZDP-04036	12	-	-	
24	14-1/0	35	150	8125/1093-ZDP-1/024	12	-	-	
180	26-12	2.5	20	8125/1093-ZDP-12180	72	8125/2093-ZDP-12180	72	
144	26-10	4	30	8125/1093-ZDP-10144	72	8125/2093-ZDP-10144	72	
96	20-6	10	65	8125/1093-ZDP-06096	48	-	-	

To Select Painted Steel Enclosures change 2 to 1  
To Select Weidmuller Terminals change P to W  
For dimensional data see page C44

## TERMINATION



### CLASSIFICATIONS of 8125/1

NEC- Class I, Zones 1 & 2 AEx e II T6/T5  
Class I, Division 2, Groups A,B,C,D  
Class II, Division 2, Groups F,G  
Class III

Types: See Page C15  
File No. E177642

CEC- Class I, Zones 1 & 2 Ex e II T6/T5  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 1 & 2, Groups E,F,G  
Class III

CSA ENCLOSURES: See Page C15  
File No. LR 99480

II 2G Ex e II T6/T5  
II 2G Ex ia/ib IIC T6  
PTB 00 ATEX 3116  
II 2D Ex td A21 IP66, T80°C/T95°C

IECEX  
Ex e II T6/T5  
Ex ia/ib IIC T6  
Ex td T21 IP66 T80°C  
IECEX PTB 06.0060

Max. Voltage 600 AC/DC

Ambient Temperature Range:  
See Page C15

In addition to the various North American applications, this Series is PTB certified for use in Zones 1 and 2. The design conforms to CENELEC EN/IEC 60 079-7 and many others. Consult factory.

### APPLICATION

Typical applications include junction boxes for petrochemical plants, waste treatment facilities, oil refineries and other major industrial plants. As a product with certifications recognized globally, the Ready-Term® 8125 Series is well suited for original equipment manufacturers who market throughout the world.

The 8125/1 Series of terminal boxes is intended for use on circuits designed for power and motor control applications.

The 8125/2 Series is intended for use with intrinsically safe circuits. These enclosures are outfitted with blue terminals to provide an indication to field personnel that the circuits are intrinsically safe and should not be confused with non-intrinsically safe circuits.

These enclosures make it necessary for the metal entry hardware to be bonded to the ground system. Use the suitable 8166/11 conduit hubs specified in the hub table on page C15.

Custom enclosures can be configured upon request.

The following modifications are available:

- Stainless Steel hinges for right or left side (specify)
- Conduit hubs 8166/11 (specify)
- Cable glands (specify)
- Close-up plugs (specify)
- Flange plates (specify)
- Screw-Type Terminals up to 600MCM
- Cage Clamp Terminals up to 8AWG



The 8125 Series of metallic terminal boxes are available with factory installed conduit hubs for conduit installation or with cable glands for cable installation.

Approved and suitable for the location entry hardware can also be field installed.

These enclosures make it necessary for the metal cable glands or conduit hubs to be bonded to the ground system. This can be accomplished by installing enclosures with flange plates according to Method 1 (shown on the upper half of this page), or enclosures without flange plates according to Method 2 (shown on the lower half of this page).

For cable glands see section J.


Table for max. numbers of entry openings either installed with conduit hubs 8166/11 or cable glands (see page C18).

**CAUTION:**  
The max. possible number of entries which can be installed on the sides of the enclosures depends on the number of terminal columns installed. With horizontally installed columns, there are no side entries possible or only limited, depending on enclosure size. With vertically installed columns there are no bottom or top entries possible, or only limited, depending on enclosure size.


## 8125 Series Terminal Boxes

### INSTALLATION OF ENTRY HARDWARE

**Method 1:** Enclosures with flange plates using threaded openings through the flange plate and standard locknuts. Flange plates must be connected to the internal grounding system using jumper wires.

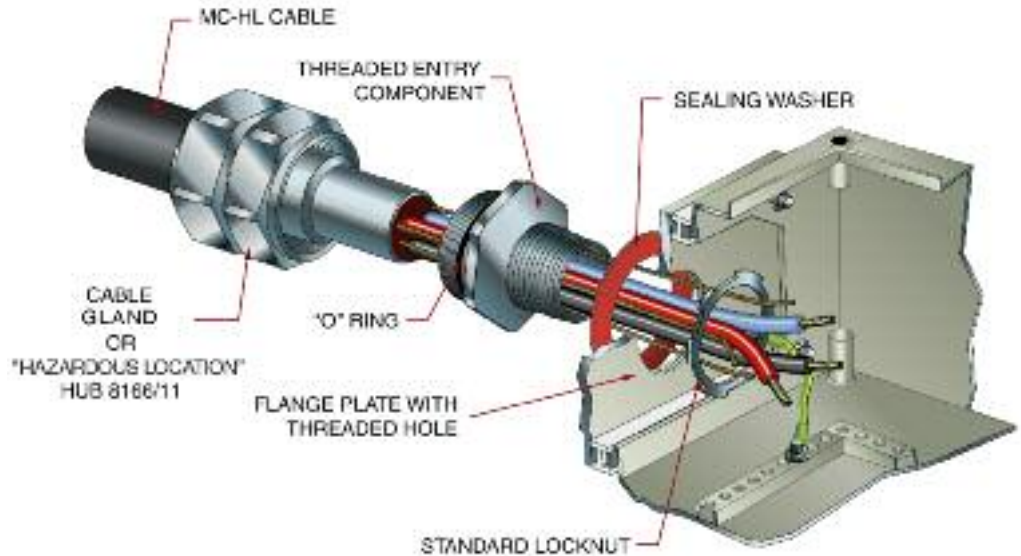

**Method 2:** Enclosures without flange plates using a hole "through the enclosure" with an "increased safety" grounding locknut.

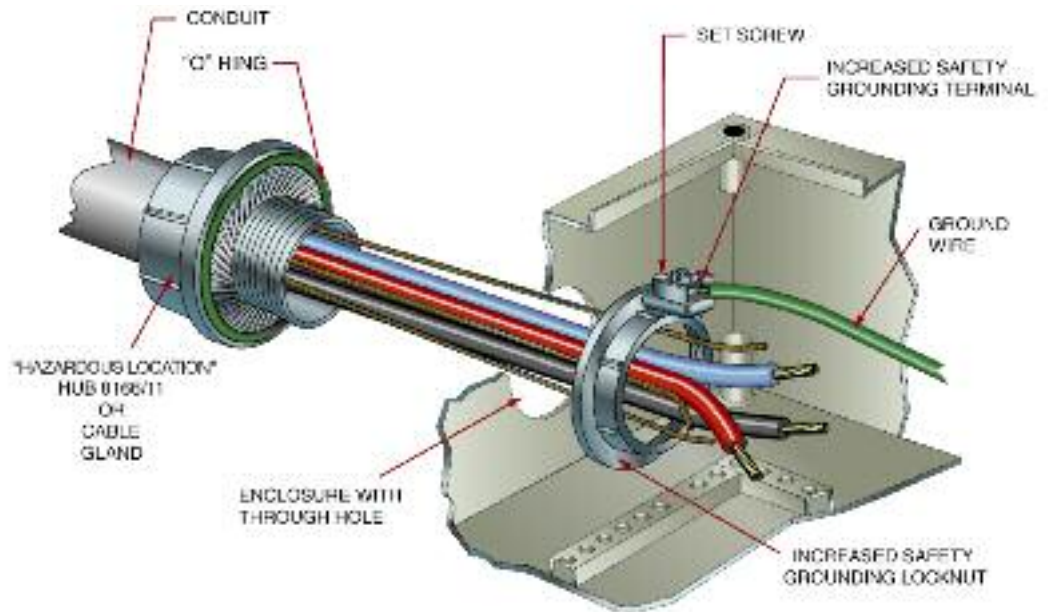


These locknuts must be bonded between each other and to the grounding system using a jumper wire.

After the entry hardware is installed, connect the appropriate conduit or cable.



## INSTALLATION OF 8166/11 CONDUIT HUBS OR TMCW CABLE GLANDS



**8125/.041**

Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	2	3	-	2
3/4"	1	3	-	2
1"	1	2	-	-
1-1/4"	1	2	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-

**8125/.051**


Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	3	3	2	2
3/4"	3	3	2	2
1"	2	2	-	-
1-1/4"	2	2	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-

**8125/.061**

Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	3	5	2	2
3/4"	3	4	2	2
1"	2	3	-	-
1-1/4"	2	2	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-

**8125/.063**

Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	6	10	4	4
3/4"	5	8	4	4
1"	4	6	2	2
1-1/4"	3	4	1	1
1-1/2"	2	3	1	1
2"	1	2	1	1
2-1/2"	1	2	1	1
3"	1	1	-	-



**8125/.071**

Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	3	8	2	4
3/4"	3	6	2	4
1"	2	5	-	-
1-1/4"	2	4	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-

**8125/.073**


Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	6	16	4	10
3/4"	5	12	4	8
1"	4	10	2	4
1-1/4"	3	7	1	4
1-1/2"	2	5	1	3
2"	1	4	1	2
2-1/2"	1	3	1	2
3"	1	2	-	-

**8125/.081**

Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	8	8	4	4
3/4"	6	6	4	4
1"	5	5	-	-
1-1/4"	4	4	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-

**8125/.083**

Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	16	16	10	10
3/4"	12	12	8	8
1"	10	10	4	4
1-1/4"	7	7	4	4
1-1/2"	5	5	3	3
2"	4	4	2	2
2-1/2"	3	3	2	2
3"	2	2	-	-



**8125/.085**

Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	23	23	10	10
3/4"	17	17	8	8
1"	12	12	4	4
1-1/4"	9	9	4	4
1-1/2"	8	8	3	3
2"	5	5	2	2
2-1/2"	3	3	2	2
3"	3	3	-	-

**8125/.091**

Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	8	17	4	8
3/4"	6	14	4	8
1"	5	10	-	-
1-1/4"	4	8	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-








**8125/.093**

Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	16	34	10	20
3/4"	12	28	8	16
1"	10	20	4	8
1-1/4"	7	12	4	8
1-1/2"	5	10	3	6
2"	4	8	2	4
2-1/2"	3	6	2	4
3"	2	5	-	-

**8125/.095**


Size	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	23	46	10	20
3/4"	17	33	8	16
1"	12	23	4	8
1-1/4"	9	20	4	8
1-1/2"	8	16	3	6
2"	5	11	2	4
2-1/2"	3	7	2	4
3"	3	6	-	-

PARTS AND ACCESSORIES


DESIGNATION	ILLUSTRATION	DESCRIPTION	CATALOG NUMBER
<b>Flange Plate Size 1</b>		5" x 2.7" x 0.2" (128 x 68 x 5 mm) carbon steel 316 stainless steel Can be fitted in Enclosures      Sides 8125/*051      A/B/C/D 8125/*061      A/B/C/D 8125/*071      A/B/C/D 8125/*S71      C/D 8125/*081      A/B/C/D	<b>81 250 01 49 0</b> <b>81 259 02 49 0</b>
<b>Flange Plate Size 2</b>		10.5" x 5" x 0.2" (266 x 128 x 5 mm) carbon steel 316 stainless steel Can be fitted in Enclosures      Sides 8125/*063      C/D 8125/*073      C/D 8125/*083; /*085      A/B/C/D 8125/*093; /*095      A/B/C/D	<b>81 250 02 49 0</b> <b>81 259 04 49 0</b>
<b>Flange Plate Size 3</b>		5" x 5" x 0.2" (126 x 126 x 5 mm) carbon steel 316 stainless steel Can be fitted in Enclosures      Sides 8125/*073      A/B	<b>81 250 03 49 0</b> <b>81 259 06 49 0</b>
<b>Flange Plate Size 4</b>		13.86" x 6.1" x 0.2" (352 x 155 x 5 mm) carbon steel 316 stainless steel Can be fitted in Enclosures      Sides 8125/*085      A/B/C/D 8125/*095      A/B/C/D	<b>81 250 04 49 0</b> <b>81 259 08 49 0</b>
<b>Coupling Frames</b>		Frame Sizes 0    2.68" x 2.68" (68 mm x 68 mm) 1    5.04" x 2.68" (128 mm x 68 mm) 2    10.47" x 4.96" (266 mm x 126 mm) 3    4.96" x 4.96" (126 mm x 126 mm) 4    13.86" x 6.1" (352 mm x 155 mm)	<b>81 460 03 10 0</b> <b>81 460 01 10 0</b> <b>81 460 04 10 0</b> <b>81 460 11 10 0</b> <b>81 250 04 10 0</b>
<b>Cover Hinges</b>		8125 for retrofitting to enclosure  Kit consists of: 2 hinges 3 hinges	<b>81 258 02 29 0</b> <b>81 258 03 29 0</b>
<b>Entry Hubs</b>			<b>8166/11 mounted</b> (see page C39 and C42)  <b>8166/11 part only</b> (see page J1)




## DIMENSIONS

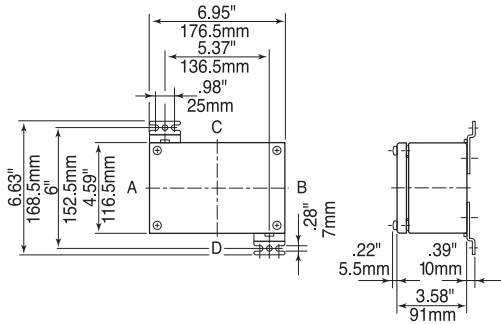


8125/041

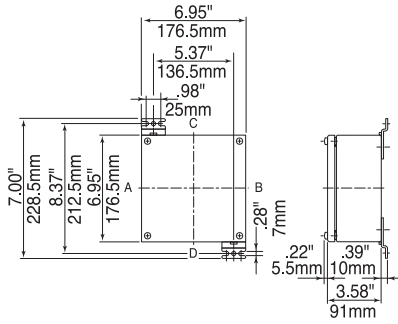


8125/051

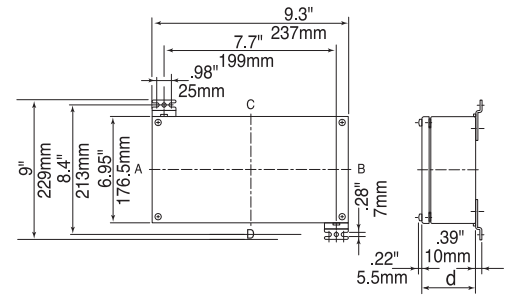


8125/06

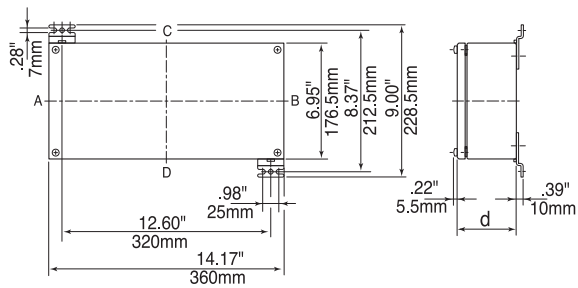

8125/07

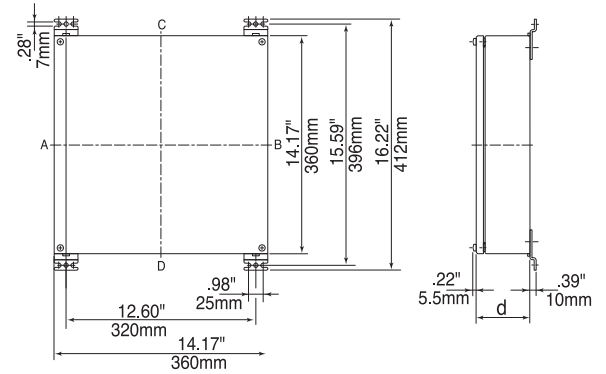


8125/08

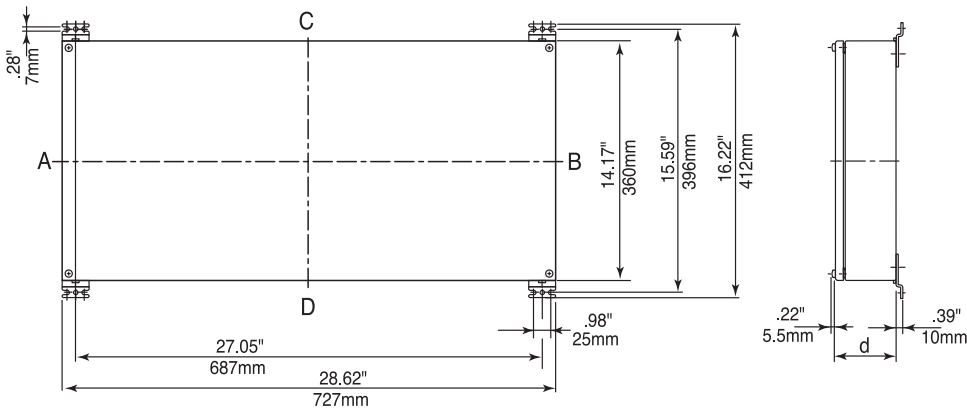

8125/09

Available Enclosure Depth (d)				
Enclosure Sizes	1	3	5	6
	3.58" 91mm	5.91" 150mm	7.48" 190mm	9.06" 230mm
8125/04	x	-	-	-
8125/05	x	-	-	-
8125/06	x	x	-	-
8125/07	x	x	-	-
8125/08	x	x	x	x
8125/09	x	x	x	-

Flange option:  
Add to overall  
dimensions.






### Electrical Capacity Tables


(only applicable for Class I, Zone 1)


In Class I, Zone 1 hazardous (classified) areas, heat produced by current in the wire inside an enclosure is a concern. Therefore, the continuous current of each current carrying conductor, the quantity and the size of the conductors inside a terminal enclosure needs to be limited. For each enclosure size, there is one table which shows the permissible values for that particular terminal enclosure.

### How to use the electrical capacity tables:

- Determine the enclosure type you are dealing with.
- Reference the applicable electrical capacity table printed on pages C46-C49.

 In the white area of the table the permitted numbers of current carrying conductors inside the enclosure are indicated (in and out counts two wires) depending on wire size and continuous current.

 In the green shaded area of the table additional conductors/terminals are permitted up to the space limit of the enclosure. (see catalog pages C39 & C40)

 In the area with red diagonal lines of the table no conductors/terminals are permitted.

Jumper links and ground wires can be neglected, in calculating the number of wires. These can be added whenever necessary.

### Terminal Data

Terminal Type Phoenix	solid/stranded wire range	Max. voltage, V	Max. Amps	Torque lb-in
UT 2.5	26-12	600	20	5.3-7
UT 4	26-10	600	30	5.3-7
UT 6	24-8	600	50	13.3-16
UT 10	20-6	600	65	13.3-16
UT 16	16-4	600	85	22-26.5
UT 35	14-1/0	600	150	28-32.7
Terminal Type Weidmueller				
WDU 2.5	22-12	600	25	4.5-7.1
WDU 4	22-10	600	35	9
WDU 6	20-8	600	45	14.2
WDU 10	16-6	600	65	20.4
WDU 16	14-6	600	70	35
WDU 35	12-2	600	115	51
WDU 70	6-2/0	600	175	87
WDU 120	2-250	600	225	130
WFF 185	8-500	600	380	177
WFF 300	6-600	600	500	354
Terminal Type Wago				
281-691	28-12	600	20	N/A
281-991	28-12	600	20	N/A
282-691	24-10	600	30	N/A
283-691	24-6	600	65	N/A
284-691	24-8	600	50	N/A

### EXAMPLE:

Enclosure type: 8125/1061-2DP-10021(see page C39).

The maximum physical quantity of terminals 30-10 AWG for this enclosure is 21.

Reference the table 8125/1061 on page C46, you will find that 18 wires 10 AWG with 30 Amps continuous current is the thermal limit of this enclosure.

Conclusion: To terminate 18 wires 9 terminals are needed, terminating two wires per terminal only. The remaining 12 terminals (21-9=12) can be used for low amperage circuits in the green shaded area of the table. Jumper links and ground wires can be neglected.

Mixed circuits of different wire sizes and current values are possible by applying the table values proportionally

i.e. enclosure table 8125/1061.

Wire Size AWG	Current Amps	Number of Current Carrying Conductors		Proportion
		Permissible	Actual	
12	20	24	12	50%
10	30	18	9	50%

100% max.

## ELECTRICAL CAPACITY TABLES

Enclosure 8125/1041				
Current Amps	Wire size AWG			
	16	14	12	10
5				
10	29	57		
15		21	42	
20			21	47
25				24
30				15

Enclosure 8125/1051							
Current Amps	Wire size AWG						
	16	14	12	10	8	6	4
5							
10	32	64					
15		24	48				
20			24	53			
25				27			
30				17	38		
35					24		
40					17	44	
45						28	
50						20	
60							30
65							22
70							17

Enclosure 8125/1061							
Current Amps	Wire size AWG						
	16	14	12	10	8	6	4
5							
10	34	68					
15		26	51				
20			24	56			
25				29			
30				18	40		
35					25		
40					18	47	
45						29	
50						21	
60							32
65							24
70							18

Enclosure 8125/1063							
Current Amps	Wire size AWG						
	16	14	12	10	8	6	4
5							
10	45	89					
15		34	67				
20			33	74			
25				38			
30				24	53		
35					33		
40					23	62	
45						38	
50						28	
60							42
65							31
70							24

## ELECTRICAL CAPACITY TABLES

Current Amps	Wire size AWG									
	16	14	12	10	8	6	4	3	2	1
5										
10	36	71								
15		27	53							
20			26	59						
25				30						
30				19	42					
35					27					
40					18	49				
45						31				
50						22				
60							33			
65						25	62			
70							19	35		
80								20	42	
85								16	30	
90								13	23	
100								9	16	29
110									11	19
115									9	16
125										12

Current Amps	Wire size AWG											
	16	14	12	10	8	6	4	3	2	1	1/0	2/0
5												
10	46	91										
15		35	68									
20			34	75								
25				39								
30				24	54							
35					34							
40					24	63						
45						39						
50						28						
60							43					
65							32	80				
70							25	44				
80								26	54			
85								21	38			
90								17	30			
100								11	20	38		
110									14	25	84	
115									12	21	44	
125										15	28	
150											13	25
175												13

Current Amps	Wire size AWG/MCM														
	16	14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250
5															
10	53	105													
15		40	78												
20			39	87											
25				45											
30				28	62										
35					39										
40					27	72									
45						45									
50						33									
60							50								
65							37	92							
70							29	51							
80								30	62						
85								25	44						
90								20	34						
100								13	23	44					
110								16	29	97					
115								13	24	51					
125									17	32					
150										15	29				
175											15	30			
200												16	35		
225													18	36	

Current Amps	Wire size AWG										
	16	14	12	10	8	6	4	3	2	1	1/0
5											
10	49	98									
15		37	73								
20			36	80							
25				41							
30				26	58						
35					37						
40					25	67					
45						42					
50						30					
60							46				
65							34	85			
70							27	47			
80								28	58		
85								23	41		
90								19	32		
100								12	22	40	
110									15	27	87
115									12	22	46
125										16	29

## ELECTRICAL CAPACITY TABLES

Enclosure 8125/1083															
Current Amps	Wire size AWG/MCM														
	16	14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250
5															
10	60	119													
15		45	89												
20			44	98											
25				50											
30				31	71										
35					45										
40					31	82									
45						51									
50						37									
60							56								
65							42	104							
70							32	58							
80								34	70						
85								28	50						
90								23	39						
100								15	26	49					
110								18	33	109					
115								15	27	58					
125									20	37					
150									17	33					
175										16	34				
200											18	40			
225												21	40		

Enclosure 8125/1085															
Current Amps	Wire size AWG/MCM														
	16	14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250
5															
10	68	133													
15		51	100												
20			49	110											
25				57											
30				35	79										
35					50										
40					35	92									
45						57									
50						42									
60							63								
65							47	117							
70							36	65							
80								38	79						
85								31	56						
90								25	44						
100								17	30	55					
110									21	37	123				
115									17	31	65				
125										22	41				
150											19	37			
175												19	38		
200													20	45	
225														24	45

Enclosure 8125/1091											
Current Amps	Wire size AWG										
	16	14	12	10	8	6	4	3	2	1	1/0
5											
10	57	113									
15		43	84								
20			42	93							
25				48							
30				30	67						
35					42						
40					29	78					
45						49					
50						35					
60							53				
65							40	99			
70							31	55			
80								33	67		
85								26	47		
90								22	37		
100								14	25	47	
110									17	31	100
115									14	26	53
125										19	33
150											15



ELECTRICAL CAPACITY TABLES

		Enclosure 8125/1093																	
Current Amps	Wire size AWG/MCM																		
	16	14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250	300	400	500	600
5																			
10	68	134																	
15		51	100																
20			49	110															
25				57															
30				35	79														
35					50														
40					35	92													
45						57													
50						42													
60							63												
65							47	117											
70							36	65											
80								38	79										
85								31	56										
90								26	44										
100								17	30	56									
110								21	37	123									
115								17	31	65									
125									22	41									
150									19	37									
175										19	38								
200											20	45							
225												24	45						
250													24	60					
300														17					
350															22				
380																37			
400																		34	
450																			27

		Enclosure 8125/1095																	
Current Amps	Wire size AWG/MCM																		
	16	14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250	300	400	500	600
5																			
10	75	147																	
15		56	110																
20			54	121															
25				62															
30				39	87														
35					55														
40					38	101													
45						63													
50						46													
60							69												
65								52	129										
70								40	72										
80									42	87									
85									34	61									
90									28	48									
100									19	33	61								
110										23	40	135							
115										19	34	72							
125											25	45							
150											21	41							
175												20	42						
200													22	49					
225														26	50				
250															27	66			
300																19			
350																	24		
380																		41	
400																			36
450																			29

# 8146 Series Terminal Boxes

## TERMINATION

STAHL



### Ready-Term® 8146 Terminal Boxes Features:

- *Pre-Configured with terminals mounted*
- *Made of Fiberglass Reinforced Polyester (FRP)*
- *8 enclosure sizes with different depths*
- *For power and control circuits*
- *For I.S. circuits with blue terminals*
- *Entry hardware optional*
- *Field installation possible*



### CLASSIFICATIONS of 8146/1

NEC- Class I, Zones 1 & 2 AEx e II T6/T5  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Division 2, Groups F,G  
 Class III  
 Types 3,4 & 4X; IP66  
 File No. E177642

CEC-Class I, Zones 1 & 2 Ex e II T6/T5  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III

CSA ENCLOSURES 3, 4 & 4X; IP66  
 File No. LR 99480

II 2G Ex e II T6/T5  
 II 2G Ex ia/ib IIC T6  
 PTB 01 ATEX 1016

II 2D Ex A21 IP66, T80°C, T45°C

### IECEX

Ex e II T6/T5  
 Ex ia/ib IIC T6  
 Ex TD A21 IP66 T80°C  
 IECEX PTB 06.0046

### Max. Voltage 600 AC/DC

### Ambient Temperature Range:

8146/1 +55°C (+131°F) Max., T5  
 +40°C (+104°F) Max., T6  
 -20°C (-4°F) Min.

8146/2 +75°C (+167°F) Max., T6  
 -20°C (-4°F) Min.

### Special Ambient Temperature Range:\*

8146/1 +55°C (+131°F) Max., T5  
 +40°C (+104°F) Max., T6  
 -40°C (-40°F) Min.

8146/2 +75°C (+167°F) Max., T6  
 -40°C (-40°F) Min.

\* Consult Factory

### FEATURES

The Ready-Term® 8146 Series of terminal boxes are made of impact proof fiberglass reinforced polyester resin. They offer a one-source solution to the time-consuming process of providing ready to install terminal boxes for hazardous locations. With its single part number solution, the Ready-Term® 8146 Series eliminates the inconvenience of purchasing the enclosure and individual parts. This Series is supplied with the indicated quantity of individually numbered terminals for each size of enclosure, fully certified and ready to be installed.

The FRP Ready-Term® 8146 Series are made of specially formulated impact proof glass fiber reinforced polyester which provides superior corrosion resistance while dissipating static electricity.

### Ordering Information

TERM. QTY.	WIRE RANGE AWG.	TERM. SIZE mm2	MAX. AMPS. PER TERM.	CATALOG NUMBER		ENCLOSURE ORIENTATION		
				FOR POWER & CONTROL CIRCUITS	GRND. WIRE CONNECTIONS		FOR INTRINSICALLY SAFE CIRCUITS	PA WIRE CONNECTIONS
9	26-12	2.5	20	8146/1031-3DP-12009	4	8146/2031-3DP-12009	4	
15	26-12	2.5	20	8146/1041-3DP-12015*	8	8146/2041-3DP-12015*	8	
18	26-12	2.5	20	8146/1051-3DP-12018	14	8146/2051-3DP-12018	14	
15	26-10	4	30	8146/1051-3DP-10015	14	8146/2051-3DP-10015	14	
9	20-6	10	65	8146/1051-3DP-06009	12	-	-	
24	26-12	2.5	20	8146/1061-3DP-12024	14	8146/2061-3DP-12024	14	
21	26-10	4	30	8146/1061-3DP-10021	14	8146/2061-3DP-10021	14	
9	20-6	10	65	8146/1061-3DP-06009	12	-	-	
45	26-12	2.5	20	8146/1071S-3DP-12045	14	8146/2071S-3DP-12045	14	
36	26-10	4	30	8146/1071S-3DP-10036	14	8146/2071S-3DP-10036	14	
24	20-6	10	65	8146/1071S-3DP-06024	12	-	-	

To Select Weidmuller Terminals Change P to W.  
 For dimensional data see page C6  
 \*With Phoenix terminals only

### "Hazardous Location" Conduit Hubs, Mounted

HUB, NPT THREAD SIZE	CATALOG NUMBER
1/2"	8166/11-01-NE m
3/4"	8166/11-02-NE m
1"	8166/11-03-NE m
1 1/4"	8166/11-04-NE m
1 1/2"	8166/11-05-NE m
2"	8166/11-06-NE m
2 1/2"	8166/11-07-NE m
3"	8166/11-08-NE m



# Ready-Term® 8146 Terminal Boxes

PRE-CONFIGURED FRP TERMINAL BOXES WITH PHOENIX TERMINALS

## Ordering Information

TERM. QTY.	WIRE RANGE AWG.	TERM. SIZE mm <sup>2</sup>	MAX. AMPS. PER TERM.	CATALOG NUMBER		CATALOG NUMBER		ENCLOSURE ORIENTATION
				FOR POWER & CONTROL CIRCUITS	GRND. WIRE CON-NECTIONS	FOR INTRINSICALLY SAFE CIRCUITS	PA WIRE CON-NECTIONS	
45	26-12	2.5	20	8146/1073S-3DP-12045	14	8146/2073S-3DP-12045	14	
36	26-10	4	30	8146/1073S-3DP-10036	14	8146/2073S-3DP-10036	14	
24	20-6	10	65	8146/1073S-3DP-06024	12	-	-	
18	16-4	16	85	8146/1073S-3DP-04018	6	-	-	
12	14-1/0	35	150	8146/1073S-3DP-1/012	6	-	-	
45	26-12	2.5	20	8146/1083-3DP-12045	36	8146/2083-3DP-12045	36	
36	26-10	4	30	8146/1083-3DP-10036	36	8146/2083-3DP-10036	36	
24	20-6	10	65	8146/1083-3DP-06024	24	-	-	
18	16-4	16	85	8146/1083-3DP-04018	6	-	-	
12	14-1/0	35	150	8146/1083-3DP-1/012	6	-	-	
90	26-12	2.5	20	8146/1083-3DP-12090	72	8146/2083-3DP-12090	72	
72	26-10	4	30	8146/1083-3DP-10072	72	8146/2083-3DP-10072	72	
48	20-6	10	65	8146/1083-3DP-06048	48	-	-	
90	26-12	2.5	20	8146/1093-3DP-12090	72	8146/2093-3DP-12090	72	
72	26-10	4	30	8146/1093-3DP-10072	72	8146/2093-3DP-10072	72	
48	20-6	10	65	8146/1093-3DP-06048	48	-	-	
36	16-4	16	85	8146/1093-3DP-04036	12	-	-	
24	14-1/0	35	150	8146/1093-3DP-1/024	12	-	-	
180	26-12	2.5	20	8146/1093-3DP-12180	72	8146/2093-3DP-12180	72	
144	26-10	4	30	8146/1093-3DP-10144	72	8146/2093-3DP-10144	72	
96	20-6	10	65	8146/1093-3DP-06096	48	-	-	

To Select Weidmuller Terminals Change P to W  
For dimensional data see page C6

## TERMINATION



### CLASSIFICATIONS of 8146/1

NEC- Class I, Zones 1 & 2 AEx e II T6/T5  
Class I, Division 2, Groups A,B,C,D  
Class II, Division 2, Groups F,G  
Class III  
Types 3, 4 & 4X; IP66  
File No. E177642

CEC- Class I, Zones 1 & 2 Ex e II T6/T5  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 1 & 2, Groups E,F,G  
Class III  
CSA ENCLOSURES 3, 4 & 4X; IP66  
File No. LR 99480

II 2G Ex e II T6/T5  
II 2G Ex ia/ib IIC T6  
PTB 01 ATEX 1016

II 2D Ex td A21 IP66, T80°C, T45°C

IECEX  
Ex e II T6/T5  
Ex ia/ib IIC T6  
Ex TD A21 IP66 T80°C  
IECEX PTB 06.0046

Max. Voltage 600 AC/DC

Ambient Temperature Range:  
See Page C1

In addition to the various North American applications, this Series is PTB certified for use in Zones 1 and 2. The design conforms to CENELEC EN/IEC 60 079-7 and many others. Consult factory.

### APPLICATION

Typical applications include junction boxes for petrochemical plants, waste treatment facilities, oil refineries and other major industrial plants. As a product with certifications recognized globally, the Ready-Term® 8146 Series is well suited for original equipment manufacturers who market throughout the world.

The 8146/1 Series of terminal boxes is intended for use on circuits designed for power and motor control applications.

The 8146/2 Series is intended for use on circuits which are intrinsically safe. These enclosures are outfitted with blue terminals to provide an indication to field personnel that the circuits are intrinsically safe and should not be confused with non-intrinsically safe circuits.

These enclosures make it necessary for the metal entry hardware to be bonded to the ground system. Use the suitable 8166/11 conduit hubs specified in the hub table on page C1.

Custom enclosures can be configured upon customer request.

The following modifications are available:

- Conduit hubs 8166 (specify)
- Cable glands (specify)
- Close-up plugs (specify)
- Flange plates (specify)
- Screw-type terminals up to 600 MCM
- Cage-clamp Terminals up to 8 AWG



INNOVATIVE EXPLOSION PROTECTION by R. STAHL 1-800-782-4357



The 8146 Series of FRP terminal boxes are available with factory installed conduit hubs for conduit installation or with cable glands for cable installation.

Approved and suitable for the location entry hardware can also be field installed.

These enclosures make it necessary for the metal cable glands or conduit hubs to be bonded to the ground system. This can be accomplished by installing them to a threaded brass back plate as shown with Method 1 (shown on the upper half of this page), or with grounding nuts, according to Method 2 (shown on the lower half of this page).

For cable glands see section J.


Table for max. numbers of entry openings either installed with conduit hubs 8166/11 or cable glands (see page C4) .

**CAUTION:**  
The max. possible number of entries which can be installed on the sides of the enclosures depends on the number of terminal columns installed. With horizontally installed columns, there are no side entries possible or only limited, depending on enclosure size. With vertically installed columns there are no bottom or top entries possible, or only limited, depending on enclosure size.

## 8146 Series Terminal Boxes


### INSTALLATION OF ENTRY HARDWARE

**Method 1:** Installation using a hole 'through the enclosure' with a brass back plate (see page C5 with a threaded opening and "increased safety" ground terminal.

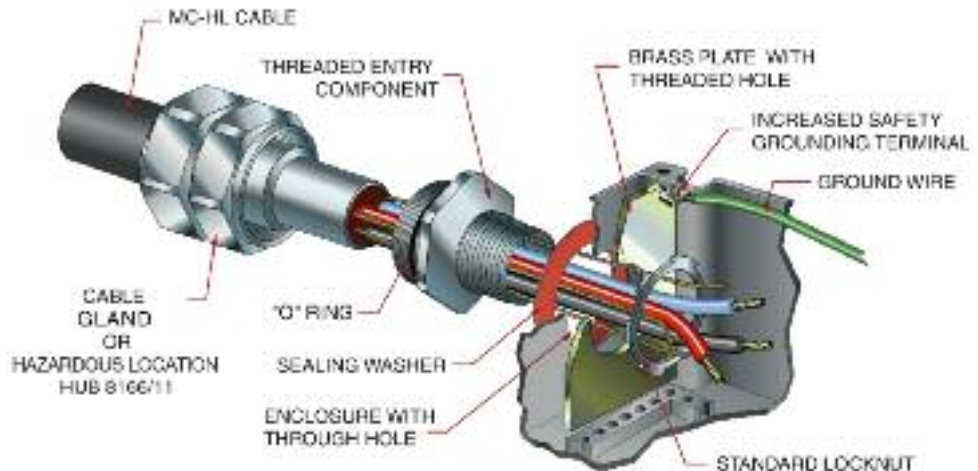


Brass Plate(s) must be connected to internal grounding system using jumper wires.

**Method 2:** Installation using a hole 'through the enclosure' with an "increased safety" grounding locknut instead of a brass back plate.

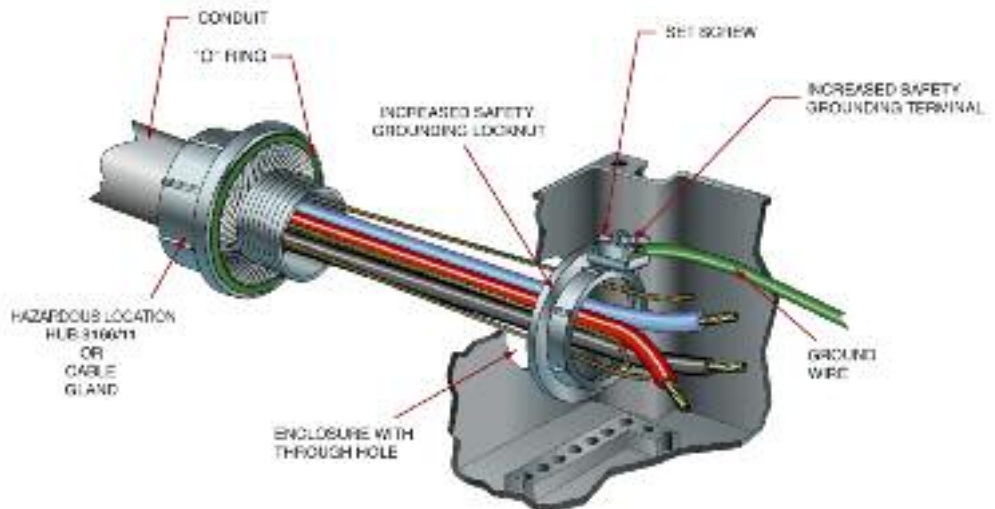

These locknuts must be bonded between each other and to the grounding system using a jumper wire.

## INSTALLATION OF 8166/11 CONDUIT HUBS OR CABLE GLANDS




Size	8146/.031		8146/.041	
	w/o flanges		w/o flanges	
	A/B	C/D	A/B	C/D
1/2"	1	1	1	2
3/4"	1	1	1	2
1"	-	1	1	1
1-1/4"	-	-	1	1
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-

Size	8146/.051/.052			
	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	2	3	-	2
3/4"	1	2	-	2
1"	1	2	-	1
1-1/4"	1	1	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-

Size	8146/.061/.062			
	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	3	4	2	2
3/4"	2	3	2	2
1"	2	2	1	1
1-1/4"	1	2	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-

Table for max. numbers of entry openings either installed with conduit hubs 8166/11 or cable glands (see section J).

**CAUTION:**  
The max. possible number of entries which can be installed on the sides of the enclosures depends on the number of terminal columns installed. With horizontally installed columns, there are no side entries possible or only limited, depending on enclosure size. With vertically installed columns there are no bottom or top entries possible, or only limited, depending on enclosure size.




Size	8146/.071/.072			
	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	3	6	2	4
3/4"	2	5	2	4
1"	2	4	1	2
1-1/4"	1	3	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-

Size	8146/.073/.075			
	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	6	12	4	11
3/4"	5	9	4	9
1"	4	8	2	4
1-1/4"	2	5	1	4
1-1/2"	2	4	1	3
2"	1	3	1	2
2-1/2"	1	2	1	2
3"	1	2	-	-

Size	8146/.S71			
	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	2	7	-	4
3/4"	1	6	-	4
1"	1	4	-	2
1-1/4"	1	4	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-

Size	8146/.S73			
	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	5	14	-	11
3/4"	3	12	-	9
1"	2	8	-	4
1-1/4"	1	5	-	4
1-1/2"	1	4	-	3
2"	1	3	-	2
2-1/2"	-	3	-	2
3"	-	2	-	-




Size	8146/.081/.082			
	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	6	7	4	4
3/4"	5	6	4	4
1"	4	4	2	2
1-1/4"	3	4	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-






Size	8146/.083/.085/.086			
	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	12	14	11	11
3/4"	9	12	9	9
1"	8	8	4	4
1-1/4"	5	5	4	4
1-1/2"	4	4	3	3
2"	3	3	2	2
2-1/2"	2	3	2	2
3"	2	2	-	-

Size	8146/.091/.092			
	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	7	12	4	8
3/4"	6	10	4	8
1"	4	8	2	4
1-1/4"	4	7	-	-
1-1/2"	-	-	-	-
2"	-	-	-	-
2-1/2"	-	-	-	-
3"	-	-	-	-


Size	8146/.093/.095			
	w/o flanges		with flanges	
	A/B	C/D	A/B	C/D
1/2"	14	28	11	22
3/4"	12	19	9	18
1"	8	16	4	8
1-1/4"	5	11	4	8
1-1/2"	4	7	3	6
2"	3	6	2	4
2-1/2"	3	4	2	4
3"	2	4	-	-

## PARTS AND ACCESSORIES


ILLUSTRATION/DESCRIPTION		CATALOG NUMBER
<b>Brass Plates for Flange Plates</b>    To bond metal cable glands  for 8146	Flange Size	
	1	<b>81 460 10 55 0</b>
	2	<b>81 460 33 55 0</b>
	3	<b>81 460 54 55 0</b>
<b>Brass Plates for Enclosures without Flange Plates</b>  8146/•03•  8146/•04•  8146/•05•  8146/•06•  8146/•071  8146/•073 & 8146/•075  8146/•S71  8146/•S73  8146/•081  8146/•083 & 8146/•085 & 8146/•086  8146/•091  8146/•093 & 8146/•095  Flange-enclosure	Side C/D	<b>81 460 17 55 0</b>
	A/B C/D	<b>81 460 17 55 0</b> <b>81 460 43 55 0</b>
	A/B C/D	<b>81 460 11 55 0</b> <b>81 460 22 55 0</b>
	A/B C/D	<b>81 460 22 55 0</b> <b>81 460 16 55 0</b>
	A/B C/D	<b>81 460 22 55 0</b> <b>81 460 23 55 0</b>
	A/B C/D	<b>81 460 39 55 0</b> <b>81 460 42 55 0</b>
	A/B C/D	<b>81 460 11 55 0</b> <b>81 460 31 55 0</b>
	A/B C/D	<b>81 460 38 55 0</b> <b>81 460 41 55 0</b>
	A/B C/D	<b>81 460 23 55 0</b> <b>81 460 31 55 0</b>
	A/B C/D	<b>81 460 40 55 0</b> <b>81 460 41 55 0</b>
	A/B C1/D1 C2/D2	<b>81 460 30 55 0</b> <b>81 460 10 55 0</b> <b>81 460 31 55 0</b>
	A/B C1/D1 C2/D2	<b>81 460 41 55 0</b> <b>81 460 40 55 0</b> <b>81 460 41 55 0</b>
		<b>81 460 32 55 0</b>

ILLUSTRATION/DESCRIPTION		CATALOG NUMBER
<b>Flange Plates Size 1</b>    in FRP  Versions 0.11" 2,8mm thick 0.23" 5,8mm thick For Mounting on: Enclosure Sides 8146/•051/•052 C/D 8146/•061/•062 A/B/C/D 8146/•071/•072 A/B/C/D 8146/•S71 C/D 8146/•081/•082 A/B/C/D 8146/•091/•082 A/B/C/D		<b>81 460 01 49 0</b> <b>81 460 04 49 0</b>
<b>Flange Plates Size 2</b>    0.11" 2,8mm thick 0.23" 5,8mm thick For Mounting on: Enclosure Sides 8146/•073/•075 C/D 8146/•S73 C/D 8146/•083/•085/•86 A/B/C/D 8146/•093/•095 A/B/C/D		<b>81 460 05 49 0</b> <b>81 460 06 49 0</b>
<b>Flange Plates Size 3</b>    0.11" 2,8mm thick 0.23" 5,8mm thick For Mounting on: Enclosure Sides 8146/•073/•075 A/B		<b>81 460 10 49 0</b> <b>81 460 11 49 0</b>
<b>Coupling Frames</b>    Size 0 Size 1 Size 2 Size 3	2.68" x 2.68" (68 mm x 68 mm)	<b>81 460 03 10 0</b>
	5.04" x 2.68" (128 mm x 68 mm)	<b>81 460 01 10 0</b>
	10.47" x 4.96" (266 mm x 126 mm)	<b>81 460 04 10 0</b>
	4.96" x 4.96" (126 mm x 126 mm)	<b>81 460 11 10 0</b>
<b>Entry Hubs</b>  		<b>8166/11 mounted</b> (see page C1 and C4)  <b>8166/11 part only</b> (see page J1)


## DIMENSIONS

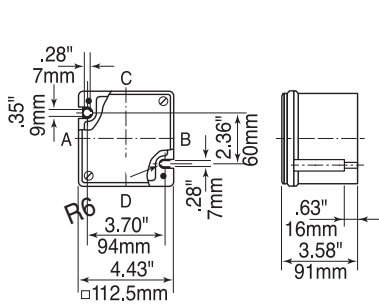


8146/031

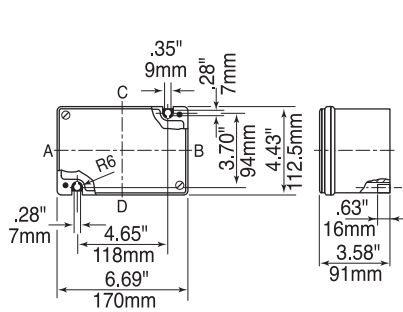


8146/041

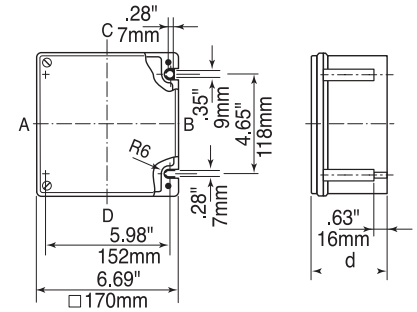


8146/05

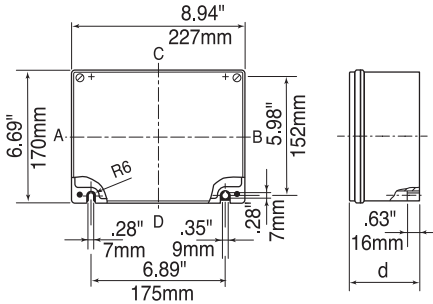


8146/06

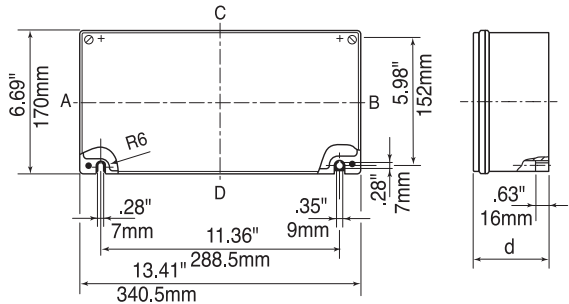

8146/07

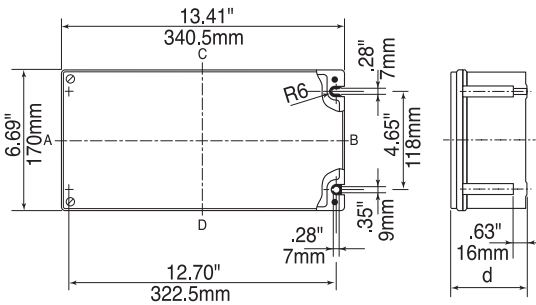


8146/S7

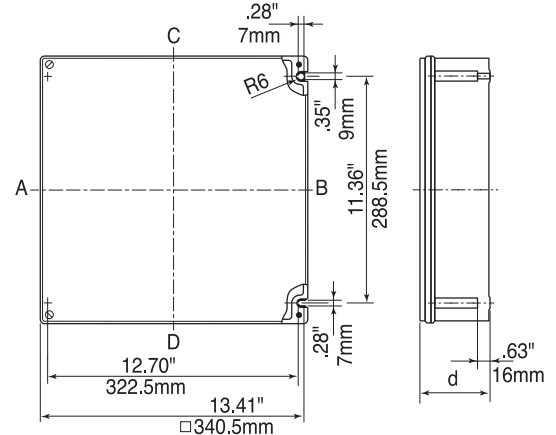

8146/08


Flange option: Add to overall dimensions.



Flange Thickness	Dimension F
0.11" 2.8mm	0.27" 7mm
0.23" 5.8mm	0.39" 10mm

Available Enclosure Depth (d)						
Enclosure Sizes	1	2	3	4	5	6
	3.58"	5.16"	5.91"	6.73"	7.48"	9.06"
	91mm	131mm	150mm	171mm	190mm	230mm
8146/03	x	-	-	-	-	-
8146/04	x	-	-	-	-	-
8146/05	x	x	-	-	-	-
8146/06	x	x	-	-	-	-
8146/07	x	x	x	-	x	-
8146/S7	x	-	x	-	-	-
8146/08	x	x	x	x	x	x
8146/09	x	x	x	-	x	-

X indicates depths available.

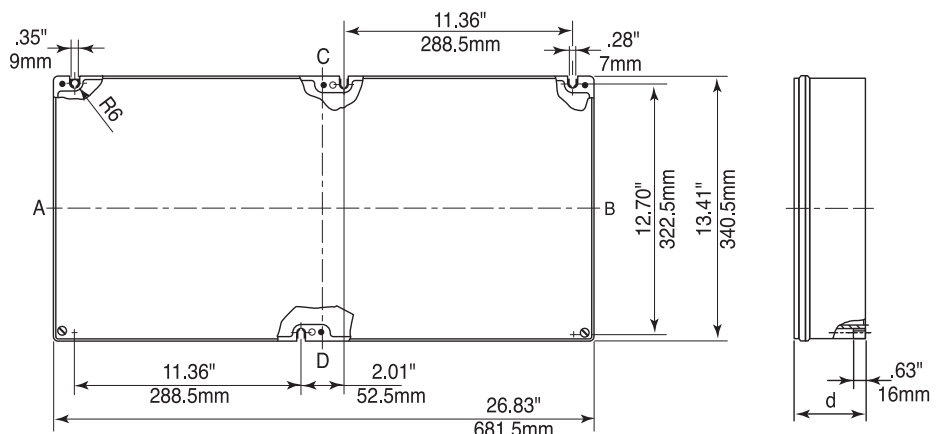

8146/09




## Electrical Capacity Tables

(only applicable for Class I, Zone 1)

In Class I, Zone 1 hazardous (classified) areas, heat produced by current in the wire inside an enclosure is a concern. Therefore, the continuous current of each current carrying conductor, the quantity and the size of the conductors inside a terminal enclosure needs to be limited. For each enclosure size, there is one table which shows the permissible values for that particular terminal enclosure.

### How to use the electrical capacity tables:

- Determine the enclosure type you are dealing with.
- Reference the applicable electrical capacity table printed on pages C8-C12.



In the white area of the table the permitted numbers of current carrying conductors inside the enclosure are indicated (in and out counts two wires) depending on wire size and continuous current.



In the green shaded area of the table additional conductors/terminals are permitted up to the space limit of the enclosure. (see pages C1 & C2)



In the area with red diagonal lines no conductors/terminals are permitted.

Jumper links and ground wires can be neglected, in calculating the number of wires. These can be added whenever necessary.

## Terminal Data

Terminal Type Phoenix	solid/stranded wire range	Max. voltage, V	Max. Amps	Torque lb-in
UT 2.5	26-12	600	20	5.3-7
UT 4	26-10	600	30	5.3-7
UT 6	24-8	600	50	13.3-16
UT 10	20-6	600	65	13.3-16
UT 16	16-4	600	85	22-26.5
UT 35	14-1/0	600	150	28-32.7
Terminal Type Weidmueller				
WDU 2.5	22-12	600	25	4.5-7.1
WDU 4	22-10	600	35	9
WDU 6	20-8	600	45	14.2
WDU 10	16-6	600	65	20.4
WDU 16	14-6	600	70	35
WDU 35	12-2	600	115	51
WDU 70	6-2/0	600	175	87
WDU 120	2-250	600	225	130
WFF 185	8-500	600	380	177
WFF 300	6-600	600	500	354
Terminal Type Wago				
281-691	28-12	600	20	N/A
281-991	28-12	600	20	N/A
282-691	24-10	600	30	N/A
283-691	24-6	600	65	N/A
284-691	24-8	600	50	N/A

### EXAMPLE:

Enclosure type: 8146/1061-3DP-10021 (see page C1).

The maximum physical quantity of terminals 30-10 AWG for this enclosure is 21.

Reference the table 8146/1061 on page C9, you will find that 18 wires 10 AWG with 30 Amps continuous current is the thermal limit of this enclosure.

Conclusion: To terminate 18 wires, 9 terminals are needed, terminating two wires per terminal only. The remaining 12 terminals (21 - 9 = 12) can be used for low amperage circuits in the green shaded area of the table. Jumper links and ground wires can be neglected.

Mixed circuits of different wire sizes and current values are possible by applying the table values proportionally

i.e. enclosure table 8146/1061.

Wire Size AWG	Current Amps	Number of Current Carrying Conductors		Proportion
		Permissible	Actual	
14	15	24	12	50%
12	20	24	12	50%

100% Max.

## ELECTRICAL CAPACITY TABLES

Enclosure 8146/1031				
Current Amps	Wire size AWG			
	16	14	12	10
5				
10	27	53		
15		20	39	
20			19	43
25				22
30				14

Enclosure 8146/1041				
Current Amps	Wire size AWG			
	16	14	12	10
5				
10	28	56		
15		21	42	
20			20	46
25				23
30				15

Enclosure 8146/1241				
Current Amps	Wire size AWG			
	16	14	12	10
5				
10	28	57		
15		21	42	
20			21	47
25				24
30				15

Enclosure 8146/1242				
Current Amps	Wire size AWG			
	16	14	12	10
5				
10	35	70		
15		26	52	
20			26	58
25				30
30				18

Enclosure 8146/1051							
Current Amps	Wire size AWG						
	16	14	12	10	8	6	4
5							
10	32	63					
15		24	47				
20			23	52			
25				27			
30				17	37		
35					24		
40					16	43	
45						27	
50						20	
60							30
65							22
70							17

Enclosure 8146/1052							
Current Amps	Wire size AWG						
	16	14	12	10	8	6	4
5							
10	39	78					
15		29	58				
20			28	64			
25				33			
30				20	46		
35					29		
40					20	53	
45						33	
50						24	
60							37
65							27
70							21

## ELECTRICAL CAPACITY TABLES

Enclosure 8146/1061							
Current Amps	Wire size AWG						
	16	14	12	10	8	6	4
5							
10	34	67					
15		24	50				
20			24	55			
25				28			
30				18	40		
35					25		
40					17	46	
45						29	
50						21	
60							31
65							23
70							18

Enclosure 8146/1062							
Current Amps	Wire size AWG						
	16	14	12	10	8	6	4
5							
10	41	81					
15		31	61				
20			30	67			
25				34			
30				21	48		
35					30		
40					21	56	
45						35	
50						25	
60							38
65							28
70							22

Enclosures 8146/1071 and 8146/1S71										
Current Amps	Wire size AWG									
	16	14	12	10	8	6	4	3	2	1
5										
10	35	70								
15		26	52							
20			25	57						
25				29						
30				18	41					
35					26					
40					18	48				
45						30				
50						22				
60							33			
65							24	61		
70							19	34		
80								20	41	
85								16	29	
90								13	23	
100								9	15	29
110									11	19
115									9	16
125										11

Enclosures 8146/1072 and 8146/1S72										
Current Amps	Wire size AWG									
	16	14	12	10	8	6	4	3	2	1
5										
10	42	83								
15		32	62							
20			31	69						
25				35						
30				22	49					
35					31					
40					21	57				
45						36				
50						26				
60							39			
65							29	73		
70							23	41		
80								24	49	
85								19	35	
90								16	27	
100								10	18	35
110									13	23
115									11	19
125										14

## ELECTRICAL CAPACITY TABLES

Enclosure 8146/1073 and 8146/1S73												
Current Amps	Wire size AWG											
	16	14	12	10	8	6	4	3	2	1	1/0	2/0
5												
10	45	90										
15		34	67									
20			33	74								
25				38								
30				24	53							
35					34							
40					23	62						
45						39						
50						28						
60							42					
65							31	79				
70							24	44				
80								26	53			
85								21	37			
90								17	29			
100								11	20	37		
110									14	25	83	
115									11	21	44	
125										15	28	
150											13	25
175												12

Enclosures 8146/1075 and 8146/1S75															
Current Amps	Wire size AWG/MCM														
	16	14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250
5															
10	52	104													
15		39	77												
20			38	85											
25				44											
30				27	61										
35					39										
40					27	71									
45						45									
50						32									
60							49								
65							36	91							
70							28	50							
80								30	61						
85								24	43						
90								20	34						
100								13	23	43					
110									16	28	95				
115									13	24	50				
125									17	32					
150										15	28				
175											14	29			
200												15	35		
225													18	35	

Enclosure 8146/1081											
Current Amps	Wire size AWG										
	16	14	12	10	8	6	4	3	2	1	1/0
5											
10	48	94									
15		36	70								
20			35	77							
25				40							
30				25	56						
35					35						
40					24	65					
45						40					
50						29					
60							44				
65							33	82			
70							26	46			
80								27	56		
85								22	39		
90								18	31		
100								12	21	39	
110									14	26	87
115									12	22	46
125										16	29
150											13

Enclosure 8146/1082											
Current Amps	Wire size AWG										
	16	14	12	10	8	6	4	3	2	1	1/0
5											
10	55	109									
15		41	81								
20			40	89							
25				46							
30				29	64						
35					41						
40					28	75					
45						47					
50						34					
60							51				
65							38	95			
70							30	53			
80								31	64		
85								25	45		
90								21	36		
100								14	24	45	
110									17	30	100
115									14	25	53
125										18	33
150											15



## ELECTRICAL CAPACITY TABLES

Enclosure 8146/1093																		
Current Amps	Wire size AWG/MCM																	
	16	14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250	300	400	600
5																		
10	65	129																
15	49	96																
20	47	106																
25		55																
30		34	77															
35			48															
40			33	89														
45				56														
50				40														
60					61													
65					45	113												
70					35	63												
80						37	76											
85						30	54											
90						25	42											
100						16	29	54										
110							20	35	119									
115							17	30	63									
125								21	40									
150								18	36									
175									18	36								
200										19	43							
225											23	44						
250												23	58					
300													17					
350														21				
380																	36	
450																		26

Enclosure 8146/1095																		
Current Amps	Wire size AWG/MCM																	
	16	14	12	10	8	6	4	3	2	1	1/0	2/0	3/0	4/0	250	300	400	600
5																		
10	72	143																
15	54	106																
20		53	118															
25			61															
30			38	85														
35				54														
40				37	98													
45					61													
50					45													
60						67												
65						50	125											
70						39	69											
80							41	84										
85							33	60										
90							27	47										
100							18	32	59									
110								22	39	131								
115								18	33	69								
125									24	44								
150										20	39							
175											20	40						
200												21	48					
225													25	48				
250														26	64			
300															19			
350																23		
380																	40	
400																		27
450																		29



STAHL

**Series Features:**

- Color coding and pin configuration makes it physically impossible to mate plugs and receptacles of different voltages and current ratings (per IEC 60 309-2).
- Interlocked switch mechanism prevents accidental removal of plug from receptacle under load.
- Horsepower rated disconnect switch
- 20A, 30A, 63A and 125A models.





### CLASSIFICATIONS

File No. OR6A2. AX

**NEC- Class I, Zones 1 & 2 AEx de IIC T\***  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III

File No. 1729614

**CEC- Class I, Zones 1 & 2 Ex de IIC T\***  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III

\*Ambient Temperature Range and T Rating:  
 8570/2 +55°C (+131°F) Max., T6  
 -50°C (-58°F) Min.

8571/2 +55°C (+131°F) Max., T5  
 +40°C (+104°F) Max., T6  
 -50°C (-58°F) Min.

Zones 1, 2, 21 & 22  
 8570: II 2 G Ex de IIC T6  
 II 2 G Ex de [ia] IIC T6  
 II 2D Ex tD A21 IP66 T80°C  
 PTB 03 ATEX 1227

8571: II 2 G Ex de IIC T6  
 II 2 G Ex de [ia] IIC T6  
 II 2D Ex tD A21 IP66 T80°C  
 PTB 04 ATEX 1060

**IECEx Zones 1, 2, 21 & 22**  
 8570: Ex de IIC T6  
 Ex de [ia] IIC T6  
 Ex tD A21 IP66 T80°C  
 IECEx PTB 05.0023  
 8571: Ex de IIC T6  
 Ex de [ia] IIC T6  
 Ex tD A21 IP66 T80°C  
 IECEx PTB 05.0024

### INTRODUCTION

The 8570 and 8571 Series of plugs and switched receptacles provide unique solutions for electrical connections in hazardous and corrosive environments in the following industries:

- Chemical                      Pharmaceutical
- Petrochemical              Offshore Energy
- Refining                        Coal Mining

They are made almost entirely from non-metallic material, and are available in 20A and 30A models.

This system makes the mating of plugs and receptacles of different voltages and current ratings physically impossible as required by the National Electrical Code. The plugs and switched receptacles are color coded according to voltage rating and ground pin position.

Each receptacle contains a horsepower rated disconnect switch. The circuit cannot be energized until the plug is inserted and the switch is turned to the ON position. The plug cannot be removed until the switch is turned to the OFF position, thus de-energizing the circuit. The switch handle is padlockable in the ON or OFF position.

### Ordering Information

POLE/WIRE	VOLTAGE (VAC) 50/60Hz	GRND. HOUR POS.	COLOR CODE	CATALOG NUMBER			
				20 AMPERE		30 AMPERE	
				RECEPTACLE	PLUG	RECEPTACLE	PLUG
2 POLE 3 WIRE	125	4	Yellow	8570/21-304	8570/22-304	-	-
	250	6	Blue	8570/21-306	8570/22-306	-	-
	480	7	Red	8570/21-307	8570/22-307	-	-
3 POLE 4 WIRE	3 ø 250	9	Blue	8570/21-409	8570/22-409	8571/21-409	8571/22-409
	3 ø 480	7	Red	8570/21-407	8570/22-407	8571/21-407	8571/22-407
	3 ø 600	5	Black	8570/21-405	8570/22-405	8571/21-405	8571/22-405
4 POLE 5 WIRE	3 øY 120/208	9	Blue	8570/21-509	8570/22-509	8571/21-509	8571/22-509
	3 øY 277/480	7	Red	8570/21-507	8570/22-507	8571/21-507	8571/22-507
	3 øY 347/600	5	Black	8570/21-505	8570/22-505	8571/21-505	8571/22-505

### Technical Data for Receptacles

DESCRIPTION	20A RECEPTACLE	30A RECEPTACLE
ENVIRONMENTAL SUITABILITY	Type 3, 4, 4X, IP66	
ENCL. MATERIAL	Polyamide	
WEIGHT	3 lbs.	4.5 lbs.
TERMINAL CAPACITY	2 Wires, 16 to 10 AWG	2 Wires, 14 to 8 AWG
TEMPERATURE RATING OF WIRE	Ta < 45°C use 75°C wire min. Ta > 45°C use 90°C wire min.	
BOTTOM ENTRY	3/4" NPT HUB	1" NPT HUB
AUXILIARY CONTACT RATING	see bottom of page D2	
HORSEPOWER RATINGS	VOLTAGE 3 PHASE 1PHASE 600 VAC 15 HP N/A 480 VAC 10 HP 5 HP 250 VAC 5 HP 3 HP 120 VAC N/A 1.5 HP	VOLTAGE 3 PHASE 600 VAC 25 HP 480 VAC 20 HP 250 VAC 10 HP — —
SHORT CIRCUIT CURRENT RATING	10 kA sym RMS	
DIMENSIONS	see pages D4 and D5	



### Technical Data for Plugs

DESCRIPTION	20A PLUG	30A PLUG
ENVIRONMENTAL SUITABILITY	Type 3, 4, 4X, IP66	
ENCL. MATERIAL	Polyamide	
WEIGHT	1 lbs.	1.3 lbs.
TERMINAL CAPACITY	1 Wire, 16 to 12 AWG	1 Wire, 14 to 8 AWG
TEMPERATURE RATING OF CORD	75°C or 90°C	
CORD O.D.	0.3" to 0.8"	0.6" to 1.1"
DIMENSIONS	see pages D4 and D5	

### Ordering Information

POLE/ WIRE	VOLTAGE (VAC) 50/60Hz	GRND. HOUR POS.	COLOR CODE	CATALOG NUMBER	
				20 AMPERE	30 AMPERE
				FLANGE RECEPT.	FLANGE RECEPT.
2 POLE 3 WIRE	125	4	Yellow	8570/25-304	-
	250	6	Blue	8570/25-306	-
	480	7	Red	8570/25-307	-
3 POLE 4 WIRE	3 $\phi$ 250	9	Blue	8570/25-409	8571/25-409
	3 $\phi$ 480	7	Red	8570/25-407	8571/25-407
	3 $\phi$ 600	5	Black	8570/25-405	8571/25-405
4 POLE 5 WIRE	3 $\phi$ Y 120/208	9	Blue	8570/25-509	8571/25-509
	3 $\phi$ Y 277/480	7	Red	8570/25-507	8571/25-507
	3 $\phi$ Y 347/600	5	Black	8570/25-505	8571/25-505

Use plug as specified on page D1



### Technical Data for Flange Receptacles

DESCRIPTION	20A RECEPTACLE	30A RECEPTACLE
ENVIRONMENTAL SUITABILITY	Type 3, 4, 4X, IP66 But not higher than enclosure	
ENCL. MATERIAL	Polyamide	
WEIGHT	3 lbs.	4.5 lbs.
TERMINAL CAPACITY	2 Wires, 16 to 10 AWG	2 Wires, 14 to 8 AWG
TEMPERATURE RATING OF WIRE	Ta $\leq$ 45°C use 75°C wire Ta > 45°C use 90°C wire	
AUXILIARY CONTACT RATING	see below	
HORSEPOWER RATINGS	VOLTAGE 3 PHASE 1PHASE 600 VAC 15 HP N/A 480 VAC 10 HP 5 HP 250 VAC 5 HP 3 HP 120 VAC N/A	VOLTAGE 3 PHASE 600 VAC 25 HP 480 VAC 20 HP 250 VAC 10 HP —
SHORT CIRCUIT CURRENT RATING	10 kA sym RMS	
DIMENSIONS	see pages D4 and D5	


### Auxiliary Contact Blocks for Receptacles 8570 and 8571



Optional Snap-in Auxiliary Contact Blocks	Catalog Number
Auxiliary Contact Block NC, A600 (600V AC, 10A)	85 708 05 76 0
Auxiliary Contact Block NO, A600 (600V AC, 10A)	85 708 06 76 0
Auxiliary Contact Block NC for I.S. Circuit	85 708 07 76 0
Auxiliary Contact Block NO for I.S. Circuit	85 708 08 76 0



### CLASSIFICATIONS

 File No. OR6A2. AX

NEC- Class I, Zones 1 & 2 AEx de IIC T\*  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 1 & 2, Groups E,F,G  
Class III

 File No. 1729614

CEC- Class I, Zones 1 & 2 Ex de IIC T\*  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 1 & 2, Groups E,F,G  
Class III

\* Ambient Temperature Range and T Rating:  
8570/2 +55°C (+131°F) Max., T6  
-50°C (-58°F) Min.  
8571/2 +55°C (+131°F) Max., T5  
+40°C (+104°F) Max., T6  
-50°C (-58°F) Min.

 Zones 1, 2, 21 & 22  
See page D1

IECEX Zones 1, 2, 21 & 22  
8570: Ex de IIC T6  
Ex de [ia] IIC T6  
Ex tD A21 IP66 T80°C  
IECEX PTB 05.0023  
8571: Ex de IIC T6  
Ex de [ia] IIC T6  
Ex tD A21 IP66 T80°C  
IECEX PTB 05.0024

### INTRODUCTION

When more than one receptacle is required in one enclosure, the flange receptacles 8570/25 and 8571/25 offer the perfect solution. They are incomplete devices and must be installed in the wall of an enclosure in compliance with the mounting, spacing, casualty and segregation requirements of the ultimate application. R.STAHL offers completely assembled Receptacle Panels in any configuration in either FRP or stainless steel enclosures according to specifications.

### ACCESSORIES

The wall and flange receptacles 8570 and 8571 accommodate up to two auxiliary contact blocks. They can be installed by snapping them into either side of the terminal block. They are not synchronized with the main contacts (Trailing - ON; Leading - OFF). There are two standard blocks one NC and one NO. The standard blocks are rated A600 (600VAC, 10A). If only one is fitted the contact may be used at its rating. If two are installed the current is limited to 5A on both contacts. There are also two I.S. blocks for intrinsically safe circuits, one NC and one NO and they both meet the requirements for simple apparatus as defined in Article 504 of NFPA 70. They all have cage clamp terminals for two wires 16 to 14 AWG.



### CLASSIFICATIONS



File No. OR6A2. AX

**NEC-** Class I, Zones 1 & 2 AEx de IIC T\*  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III

**CEC-** Class I, Zones 1 & 2 Ex de IIC T\*

Class I, Division 2, Groups A,B,C,D  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III



**8579/4:**  
 II 2G Ex de IIC T\*  
 II 2G Ex de [ib] IIC T\*  
 II 2D Ex tD A21 IP66 T90°C, T105°C  
 PTB 01 ATEX 1150

**8581/4:**  
 II 2G Ex de IIC T\*  
 II 2G Ex de [ib] IIC T\*  
 II 2D Ex tD A21 IP 66 T80°C, T95°C  
 PTB 01 ATEX 1161

\*Ambient Temperature Range and T Rating:  
 8579/4 +55°C (+131°F) Max., T5  
 +40°C (+104°F) Max., T5  
 -45°C (-49°F) Min.

8581/4 +55°C (+131°F) Max., T5  
 +40°C (+104°F) Max., T5  
 -45°C (-49°F) Min.

Each receptacle contains an horsepower rated disconnect switch. The circuit cannot be energized until the plug is inserted and the switch is turned to the ON position. The plug cannot be removed until the switch is turned to the OFF position, thus de-energizing the circuit. The switch handle is pad-lockable in the ON or OFF position.

### VALUE POINTS

The disconnect switch includes an auxiliary contact (late make, early break) as standard. This can be used for connection to a pilot light which can be used to signal power ON or power OFF, at a remote location.

### HAZARDOUS LOCATION APPLICATION DATA

When CES plugs and switched receptacles are installed in Class II, Division 1 and 2, Group E or F classified locations, a dust cap must be installed when the plug is not engaged in the receptacle. See the technical data tables for dust caps catalog numbers.

### Ordering Information

POLE/WIRE	VOLTAGE (VAC) 50/60Hz	GRND. HOUR POS.	COLOR CODE	CATALOG NUMBER			
				63 AMPERE		125 AMPERE	
				RECEPTACLE	PLUG	RECEPTACLE	PLUG
3 POLE 4 WIRE	3 ø 250	9	Blue	8579/41-409	8579/22-409	8581/41-409	8581/22-409
	3 ø 480	7	Red	8579/41-407	8579/22-407	8581/41-407	8581/22-407
	3 ø 600	5	Black	8579/41-405	8579/22-405	8581/41-405	8581/22-405
4 POLE 5 WIRE	3 øY 120/208	9	Blue	8579/41-509	8579/22-509	8581/41-509	8581/22-509
	3 øY 277/480	7	Red	8579/41-507	8579/22-507	8581/41-507	8581/22-507
	3 øY 347/600	5	Black	8579/41-505	8579/22-505	8581/41-505	8581/22-505

### Technical Data for Receptacles

DESCRIPTION	63A RECEPTACLE	125A RECEPTACLE
TEST CERTIFICATIONS	FM- J.I. OR6A2.AX PTB-01 ATEX 1150 CSA LR 99480-25	FM- J.I. OR6A2.AX PTB-01 ATEX 1161 CSA LR 99480-25
ENVIRONMENTAL SUITABILITY	Type 3, 3R,4X; IP66	
ENCL. MATERIAL	Fiberglass Reinforced Polyester	
WEIGHT	18 lbs.	50 lbs.
DIMENSIONS	see page D5	
TERMINAL CAPACITY	2 AWG	2/0 AWG (115A) 3/0 AWG (125A)
TEMP. RATING OF WIRE/CORD	75°C min.	
BOTTOM ENTRY	1 1/2" NPT HUB	2" NPT HUB
AUXILIARY CONTACT RATING	6A 250VAC	6A 250VAC
HORSEPOWER RATING	VOLTAGE 3 PHASE 600 VAC 60 HP 480 VAC 40 HP 250 VAC 20 HP	VOLTAGE 3 PHASE 600 VAC 125 HP 480 VAC 100 HP 250 VAC 40 HP
BACK-UP FUSE	Receptacle is suitable for use on a circuit capable of delivering not more than 10,000 rms symmetrical amperes, 600V max. when protected by J fuses, 100A Max. 200A Max.	
RECEPTACLE MOUNTING BOLTS	THREE 5/16" BOLTS	THREE 3/8" BOLTS




### Technical Data for Plugs


DESCRIPTION	63A PLUG	125A PLUG
TEST CERTIFICATIONS	FM- J.I. OR6A2.AX PTB-01 ATEX 1150 CSA LR 99480-25	FM- J.I. OR6A2.AX PTB-01 ATEX 1161 CSA LR 99480-25
ENVIRONMENTAL SUITABILITY	Type 3, 3R, 4X; IP66	
ENCL. MATERIAL	Polyamide	
WEIGHT	2 lbs.	3 lbs.
DIMENSIONS	see page D5	
TERMINAL CAP. (NUMBER X SIZE)	6 AWG	1 AWG
TEMP. RATING OF WIRE/CORD	90°C	
CORD O.D.	≤ 1.4"	≤ 2.0"
DUST CAPS	CATALOG NUMBER	
4/5 WIRE	85 798 01 14 0	85 818 01 14 0




*DIMENSIONS*

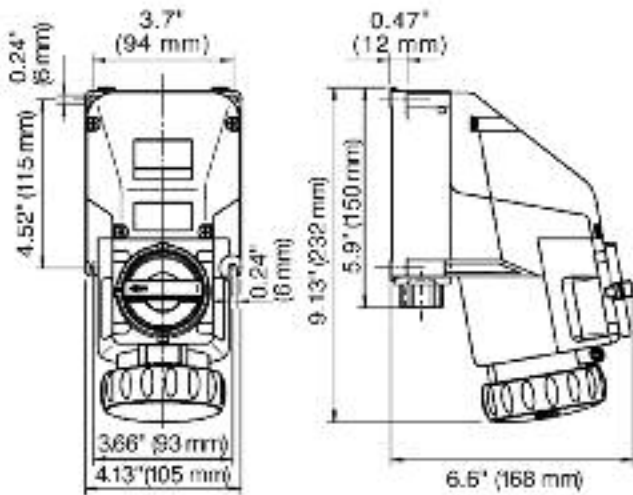


**WALL RECEPTACLE 20A**  
**2 POLE - 3 WIRE**  
**8570/21-3••**

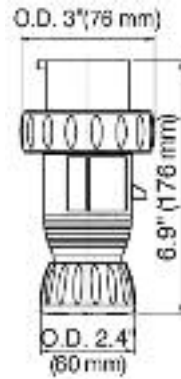


**PLUG 20A**  
**2 POLE - 3 WIRE**  
**8570/22-3••**

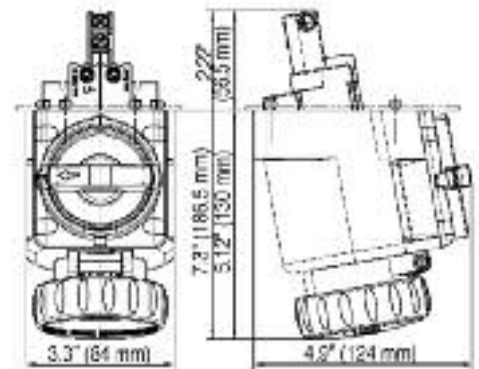


**FLANGE RECEPTACLE 20A**  
**2 POLE - 3 WIRE**  
**8570/25-3••**

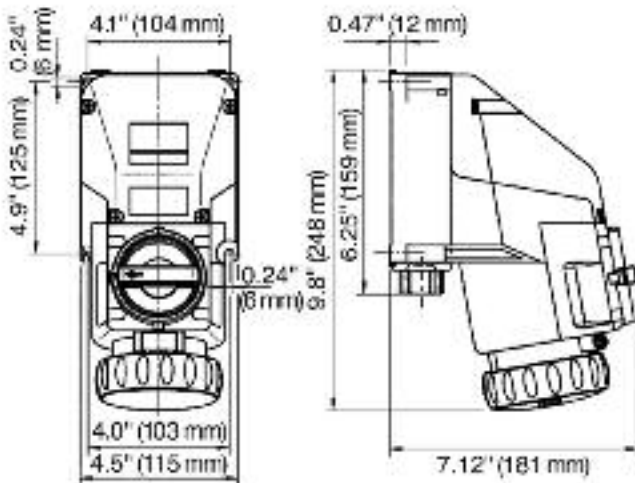

**WALL RECEPTACLE 20A**  
**3 POLE - 4 WIRE & 4 POLE 5 WIRE**  
**8570/21-•••**

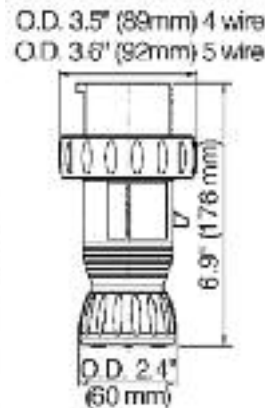


**PLUG 20A**  
**3 POLE - 4 WIRE &**  
**4 POLE - 5 WIRE**  
**8570/22-•••**

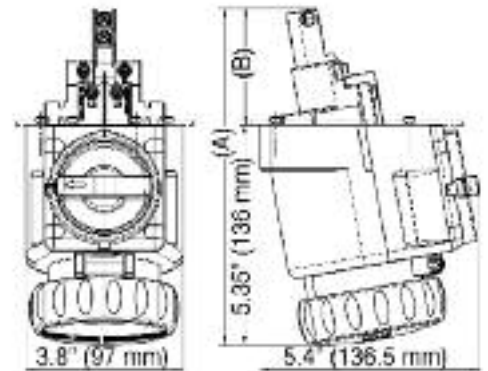


**FLANGE RECEPTACLE 20A**  
**3 POLE - 4 WIRE & 4 POLE 5 WIRE**  
**8570/25-•••**

Versions	Dimensions (approx.)	
	A	B
405, 407	8.2" (208 mm)	2.8" (72 mm)
409	7.7" (195.5 mm)	2.3" (59.5 mm)
505, 507	8.2" (208 mm)	2.8" (72 mm)
509	7.5" (190.5 mm)	2.1" (54.5 mm)



*DIMENSIONS*

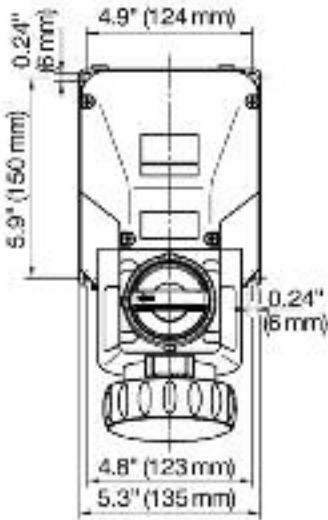

**WALL RECEPTACLE 30A**  
**3 POLE - 4 WIRE & 4 POLE - 5 WIRE**  
**8571/21-•••**

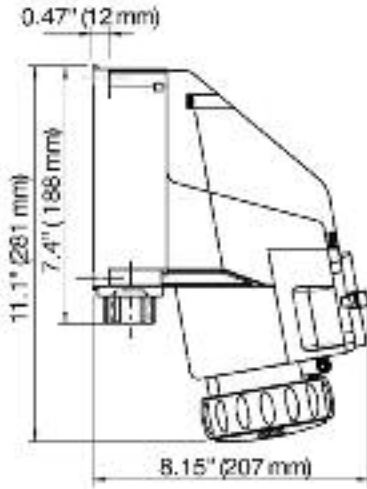









OD. 3.9" (99mm) 4 wire  
 OD. 4" (102mm) 5 wire

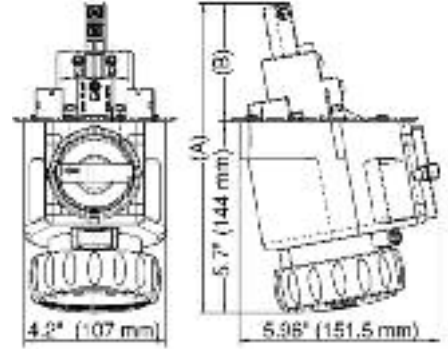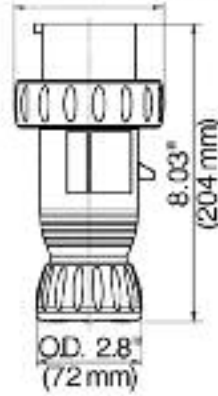

**PLUG 30A**  
**3 POLE - 4 WIRE &**  
**4 POLE - 5 WIRE**  
**8571/2-•••**

**FLANGE RECEPTACLE 30A**  
**3 POLE - 4 WIRE &**  
**4 POLE - 5 WIRE**  
**8571/25-•••**

Versions	Dimensions (approx.)	
	A	B
405, 407	9.2" (234 mm)	3.5" (90 mm)
409	8.5" (217 mm)	2.8" (73 mm)
505, 507	9.2" (234 mm)	3.5" (90 mm)
509	8.5" (217 mm)	2.8" (73 mm)

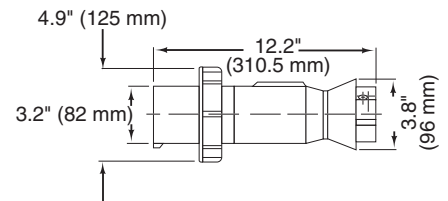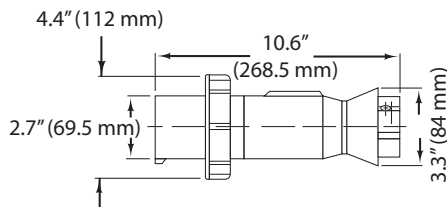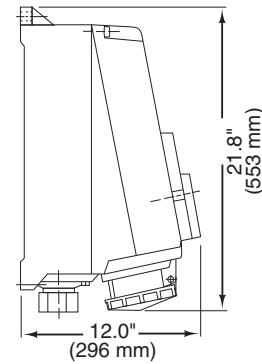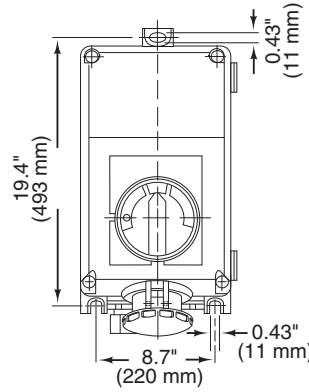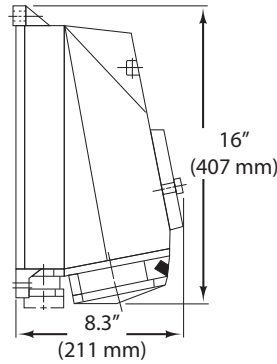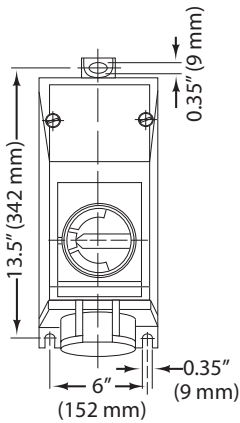

**WALL RECEPTACLE & PLUG 63A**  
**3 POLE - 4 WIRE & 4 POLE - 5 WIRE**  
**8579/2-••••**

**WALL RECEPTACLE & PLUG 125A**  
**3 POLE - 4 WIRE & 4 POLE - 5 WIRE**  
**8581/2-••••**

## CLEAN ROOM RECEPTACLE PANELS



Single Panel



Duplex Panel

### CLASSIFICATIONS

NEC & CEC

Class I, Division 2, Groups A,B,C,D  
 Class I, Zone 2, Group IIC T6  
 Enclosure Type 3 & 3R



II 2G Ex de IIC T5/T6, IP65  
 PTB 01 ATEX 1001

### Applications

Designed specifically for hazardous (classified) location clean rooms, such as found in the pharmaceutical industry, where equipment must be easy to clean and free of contaminant holding cavities. Electrical devices should also be flush wall mounted with concealed wiring, to minimize contamination.

### Features

Available with single or duplex receptacles, in 16 or 30 amps with a variety of voltages, and pin configurations. See page D7.

Color coding and pin configuration makes it physically impossible to mate plugs and receptacles of different voltages and current ratings (per IEC 60 309-2)

Flush mounting, smooth contours for easy cleaning.


Hazardous (classified) locations suitability.

Enclosure made of 316 stainless steel with concealed gasket.

Interlocked switch mechanism prevents accidental removal of plug from receptacle under load.

The internal disconnect switch includes an auxiliary contact for indicating control circuits.

### Ordering Information




Single Panel

**CRP Single Panel with Receptacle**

(choose receptacle from "ordering information" table on page D7 and fill in the red blanks)

**8125/5073**  
**8800/23 \_-0-21- \_ \_ \_ \_**



Duplex Panel

**CRP Duplex Panel**  
**Receptacle left**  
**Receptacle right**

(choose receptacles from "ordering information" table on page D7 and fill in the red blanks)

**8125/5083**  
**8800/23 \_-0-21- \_ \_ \_ \_**  
**8800/23 \_-0-21- \_ \_ \_ \_**

In addition, select mating plug(s) from information on page D7

## CLEAN ROOM RECEPTACLE PANELS

### Ordering Information

POLE/ WIRE	VOLTAGE (VAC) 50/60Hz	GRND. HOUR POS.	COLOR CODE	CATALOG NUMBER			
				16 AMPERE		30 AMPERE	
				RECEPTACLE	PLUG	RECEPTACLE	PLUG
2 POLE 3 WIRE	125	4	Yellow	8800/231-0-21-304	8570/22-304	—	—
	250	6	Blue	8800/231-0-21-306	8570/22-306	—	—
	480	7	Red	8800/231-0-21-307	8570/22-307	—	—
3 POLE 4 WIRE	3 ø 250	9	Blue	8800/231-0-21-409	8570/22-409	8800/232-0-21-409	8571/22-409
	3 ø 480	7	Red	8800/231-0-21-407	8570/22-407	8800/232-0-21-407	8571/22-407
	3 ø 600	5	Black	8800/231-0-21-405	8570/22-405	8800/232-0-21-405	8571/22-405
4 POLE 5 WIRE	3 øY 120/208	9	Blue	8800/231-0-21-509	8570/22-509	8800/232-0-21-509	8571/22-509
	3 øY 277/480	7	Red	8800/231-0-21-507	8570/22-507	8800/232-0-21-507	8571/22-507
	3 øY 347/600	5	Black	8800/231-0-21-505	8570/22-505	8800/232-0-21-505	8571/22-505

### Technical Data


DESCRIPTION	16A RECEPTACLE	30A RECEPTACLE
ENVIRONMENTAL PROTECTION	Type 3, 3S, IP65	
TERMINAL CAPACITY MAX.	1 wire, 10 AWG 4mm <sup>2</sup>	1 wire, 8 AWG 10mm <sup>2</sup>
TEMP. RATING OF WIRE/CORD	75°C min.	
SHORT CIRCUIT CURRENT RATING	10 kA sym RMS	
FREQUENCY	50/60 Hz.	
MATERIAL Enclosure Cover Gasket Switch Handle Receptacle Flange	Stainless Steel 316T, polished Polyurethane, formed in place Stainless Steel 316T Polyester	
COVER FIXING	Cover Hinges on the right Stainless Steel	
AMBIENT TEMP.	40°C (104°F) Max. -20°C (-5°F) Min.	
ENTRY HARDWARE	See Section J	

### Technical Data


DESCRIPTION	16A PLUG	30A PLUG
ENVIRONMENTAL PROTECTION	Type 4X, IP66,	
TERMINAL CAPACITY MAX.	1 wire, 12 AWG 4mm <sup>2</sup>	1 wire, 8 AWG 10mm <sup>2</sup>
TEMP. RATING OF WIRE/CORD	75°C min.	
FREQUENCY	50/60 Hz.	
MATERIAL	Polyamide	
AMBIENT TEMP.	40°C (104°F) Max. -20°C (-5°F) Min.	

For Plug Dimensions see pages D4 and D5.


### Receptacle Panel Dimensions

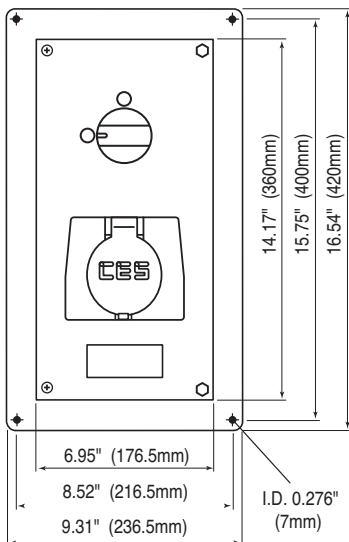

Single Receptacle Panel

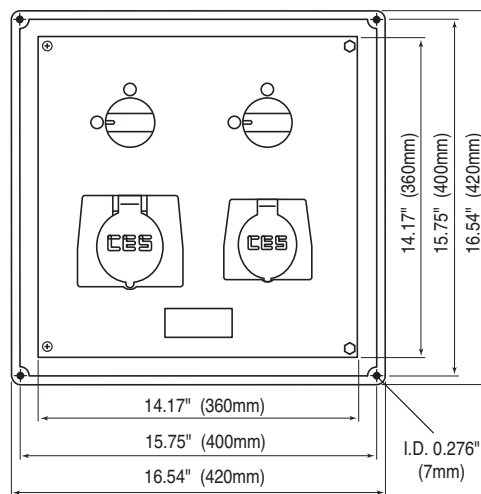

Duplex Receptacle Panel

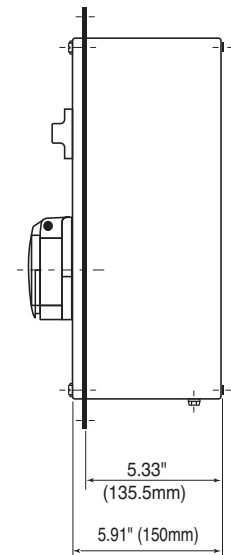

Single/Duplex Receptacle Profile

STAHL

### PanSiG Series Features:

- Suitable for hazardous and corrosive locations.
- Installation is easy and precise.
- Devices fit into a standard 30.5mm, 1.2" knock-out.
- Tightening the retainer nut makes installation complete.
- Available with cage clamp terminals or leads for easy connection.



## 8003 PUSHBUTTONS AND CONTROL SWITCHES



### CLASSIFICATIONS

#### NEC & CEC

Class I, Zone 1 & 2, AEx de IIC T6  
 Class I, Zone 1 & 2, Ex de IIC T6  
 Class I, Division 2, Groups A,B,C,D

Environmental Protection 4, 4X, IP66, Front,  
 depending on enclosure (see table –  
 “Enclosure Type Rating For Installation”)



File No. E 182378

#### 8003/1•1 and 8003/1•3



II 2 G Ex de IIC T6  
 II 2D Ex tD A21 IP66 T80°C  
 PTB 02 ATEX 1057X

#### 8003/1•2



II 2 G Ex de IIC  
 PTB 02 ATEX 1080 U

#### IECEX

#### 8003/1.1 & 8003/1.3



Ex de IIC T6  
 Ex tD A21 IP66 T80°C  
 IECEX PTB 06.0066 U

#### Ambient Temperature Range:

+60°C (+140°F) Max.  
 -30°C (-22°F) Min.

### FEATURES


The 8003 pushbutton and control switch series are typically mounted in an electrical panel or enclosure, for custom control applications. They come with different actuators, contact arrangements and connection options as indicated on pages E2, E3 and E4.

Installation is easy and precise. To install, simply snap through a standard 30.5mm (1.20”) pushbutton knockout. Hand tightening of the retainer nut makes the installation complete. The pushbuttons are suitable for hazardous (classified) locations in conjunction with the appropriate enclosure type (see above table for “Enclosure Type Rating For Installation”).

### Technical Data

Enclosure Material	Polyamide
Contact Material	Silver-Nickel
Mechanical/Electrical Life	10 <sup>6</sup> Operations
Terminal Wire Capacity	2 x 18 to 2 x 12 AWG
Wire Leads	4 Core, 18 AWG
Contact AC switching capacity	UL A 600 (750VA)
Contacts DC switching capacity	110V Max. 1 Amp. Max.
Lowest Energy	12V AC/DC, 50 mA*

\*For lower energy use gold plated contacts, available on request.



Knockout for 8003

### Enclosure Type Rating For Installation

Area Classification Of Use	Pushbutton with Cap 8003/1•1 or with Cap and Lead 8003/1•3	Pushbutton with Cage Clamps 8003/1•2 (without Cap)
Class I Zone 1	Enclosure Type 1, 2, 3, 3R, 4, 4X, 12, 13	Enclosure AEx e, Ex e
Class I Division 2 Groups A, B, C, D	Enclosure Type 1, 2, 3, 3R, 4, 4X, 12, 13	




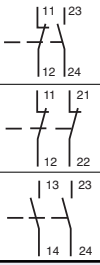
Terminate in “Increased Safety” Enclosure.



### PUSHBUTTONS

#### Ordering Information



Connection Options  Actuator Options				
	With Cage Clamps & Cap	With Cage Clamps	With Cap & 20' Lead	
Descriptions	C A T A L O G N U M B E R			Contacts
<b>Momentary Pushbutton</b> 1.5" (38mm) O.D. With two legend disks START STOP.	8003/111-001	8003/112-001	8003/113-001-6	NC/NO
	8003/121-001	8003/122-001	8003/123-001-6	NC/NC
	8003/131-001	8003/132-001	8003/133-001-6	NO/NO
<b>Emergency Stop Red Mushroom</b> 1.5" (38mm) O.D. Maintained action. Key-to-Release from maintained position.	8003/111-009	8003/112-009	8003/113-009-6	NC/NO
	8003/121-009	8003/122-009	8003/123-009-6	NC/NC
<b>Mushroom Black</b> 1.5" (38mm) O.D. Maintained action. Key-to-Release from maintained position.	8003/111-006	8003/112-006	8003/113-006-6	NC/NO
	8003/121-006	8003/122-006	8003/123-006-6	NC/NC
	8003/131-006	8003/132-006	8003/133-006-6	NO/NO
<b>Emergency Stop Red Mushroom Pushbutton</b> 1.5" (38mm) O.D. Maintained action. Turn-to-Release.	8003/111-010	8003/112-010	8003/113-010-6	NC/NO
	8003/121-010	8003/122-010	8003/123-010-6	NC/NC
<b>Emergency Stop (Jumbo) Red Mushroom Pushbutton</b> 2.16" (55mm) O.D. Maintained action. Turn-to-Release.	8003/111-015	8003/112-015	8003/113-015-6	NC/NO
	8003/121-015	8003/122-015	8003/123-015-6	NC/NC
<b>Mushroom Pushbutton Maintained Black with Red Legend Disk</b> 1.5" (38mm) O.D. Maintained action. Turn-to-Release.	8003/111-012	8003/112-012	8003/113-012-6	NC/NO
	8003/121-012	8003/122-012	8003/123-012-6	NC/NC
	8003/131-012	8003/132-012	8003/133-012-6	NO/NO
<b>Mushroom Pushbutton Black</b> 1.5" (38mm) O.D. Momentary action. With black snap-in legend disk.	8003/111-003	8003/112-003	8003/113-003-6	NC/NO
	8003/121-003	8003/122-003	8003/123-003-6	NC/NC
	8003/131-003	8003/132-003	8003/133-003-6	NO/NO

Yellow plastic washer for E-STOP function is enclosed.  
 Other legend disks must be ordered separately. See Page E7.

8003 SELECTOR SWITCHES

CATALOG NUMBER	CONTACT ARRANGEMENTS	CATALOG NUMBER	CONTACT ARRANGEMENTS
8003/11n-nnn-2-r maintained maintained		8003/14n-nnn-2-r maintained maintained	
8003/11n-nnn-2-t maintained spring return		8003/14n-nnn-2-t maintained spring return	
8003/12n-nnn-2-r maintained maintained		8003/11n-nnn-3-rr maintained maintained maintained	
8003/12n-nnn-2-t maintained spring return		8003/11n-nnn-3-rt maintained maintained spring return	
8003/13n-nnn-2-r maintained maintained		8003/11n-nnn-3-tr spring return maintained maintained	
8003/13n-nnn-2-t maintained spring return		8003/11n-nnn-3-tt spring return maintained spring return	



### 8003 SELECTOR SWITCHES

CATALOG NUMBER	CONTACT ARRANGEMENTS	CATALOG NUMBER	CONTACT ARRANGEMENTS
8003/12n-nmm-3-rr maintained maintained maintained		8003/13n-nmm-3-tr spring return maintained maintained	
8003/12n-nmm-3-rt maintained maintained spring return		8003/13n-nmm-3-tt spring return maintained spring return	
8003/12n-nmm-3-tr spring return maintained maintained		8003/14n-nmm-3-rr maintained maintained maintained	
8003/12n-nmm-3-tt spring return maintained spring return		8003/14n-nmm-3-rt maintained maintained spring return	
8003/13n-nmm-3-rr maintained maintained maintained		8003/14n-nmm-3-tr spring return maintained maintained	
8003/13n-nmm-3-rt maintained maintained spring return		8003/14n-nmm-3-tt spring return maintained spring return	



Standard:  
Key removable in all positions.  
Key type: MS 1

Special:  
Non-removable key positions need to be specified.  
Other key types than MS 1 available.



## CLASSIFICATIONS

For types 8013/31•

NEC- Class I, Zone 2, AEx nA IIC T6  
Class I, Division 2, Groups A,B,C, & D  
Class I, Zone 1, contact factory

File No. E182378

CEC- Class I, Zones 1 & 2, Ex dem IIC T6  
Class I, Division 2, Groups A,B,C, & D

II 2G Ex e mb IIC (T6)  
II 2D Ex tD A21 IP66 T80°C  
8013/311 and 8013/313  
PTB 02 ATEX 2131X  
8013/312  
PTB 02 ATEX 2130U

IECEX  
Ex e mb IIC (T6)  
Ex tD A21 IP66 T80°C  
8013/311 & 8013/313  
IECEX PTB 07.0010 X  
8013/312  
IECEX PTB 07.0012 U

## CLASSIFICATIONS

For I. S. versions 8013/32•

NEC- Class I, Zone 0, AEx ia IIB T4  
Class I, Zone 1, AEx ia IIC T4  
Class I, Division 1, Groups A,B,C, & D  
CEC- Class I, Zone 0, Ex ia IIB T4  
Class I, Zone 1, Ex ia IIC T4  
Class I, Division 1, Groups A,B,C, & D

Environmental Protection 3, 4, 4X; IP66 Front,  
depending on enclosure (see table – “Enclosure  
Type Rating For Installation”)

Ambient Temperature Range:  
+60°C (+140°F) Max.  
-30°C (-22°F) Min.

II 2G Ex d mb ia IIC (T6)  
8013/321 & 8013/323  
PTB 02 ATEX 2131X  
8013/322  
PTB 02 ATEX 2130U

IECEX  
Ex d mb ia IIC (T6)  
8013/321 & 8013/323  
IECEX PTB 07.0010 X  
8013/322  
IECEX PTB 07.0012 U

## FEATURES:

The 8013/3 Series of Pilot Lights are available for standard – and I.S. application. The Pilot Lights for standard application 8013/31-al are capable to work on voltages between 12V up to 254V AC/DC.

The types 8013/32-al are for connection with intrinsically safe circuits only and operate safely within the values stated in the above table “Intrinsic Safety Ratings Entity Parameters”.

The installation should be in accordance with ANSI/ISA RP 12. 06. 01. Recommended Barrier: 9002/13-252-121-041

## 8013/3 LED PILOT LIGHTS

### Technical Data

Material - Enclosure	Polyamide
Material - Bezel/Lens	Polyamide
Mechanical/Electrical Life	10 <sup>6</sup> Output Hours
Rated Voltage - Standard	12V to 254V AC or DC 0-60 Hz
Rated Voltage - I. S.	10.8V to 28V AC or DC
Rated Current	14 mA at 24V DC
Rated Power	0.6W
Colors	red, amber, green, blue and white
Wire Leads	2 Core, 18 AWG
Terminal Capacity	2 x 18 to 2 x 12 AWG per terminal
Enclosure Knock-out	30.5 mm or 1.2" I.D.



Intrinsic Safety Ratings Entity Parameters	
V max	28V
I max	150 mA
P max	1W
Li	0
Ci	0

### Enclosure Type Rating For Installation

Area Classification of Use	Pilot Light I.S. 8013/32•	Pilot Light with Cap 8013/3•1 or with Cap & Lead 8013/3•3	Pilot Light with Cage Clamps 8013/3•2 (without Cap)
Class I, Div. 1, I.S. Class I, Zone 0, I.S.	Enclosure Types 4, 4X, 12 or 13		
Class I, Zone 1			Increased Safety Enclosure
Class I, Division 2 Groups A,B,C & D			

Terminate in “Increased Safety” Enclosure.

### Ordering Information

Connection Options	Applications		
	With Cage Clamps & Cap	With Cage Clamps	With Cap & 20' Lead
Descriptions	CATALOG NUMBER		
Standard - 12V to 254V AC/DC	8013/311-al	8013/312-al	8013/313-al-6
For I.S. Circuits 10.8V to 28V AC/DC	8013/321-al	8013/322-al	8013/323-al-6



### 8018/3 ILLUMINATED PUSHBUTTONS

#### Technical Data


ENCLOSURE	
Material - Enclosure	Polyamide
Material - Bezel	Polyamide
Colors	red, amber, green, blue and white
Wire Leads	6 Core, 18 AWG, 20' Length
Enclosure Knock-out	30.5 mm or 1.2" I.D.
CONTACTS	
Material	Silver-Nickel
Contact Life	10 <sup>6</sup> Operations
Lowest Energy	12V AC/DC, 50 mA*
Contact Switching Capacity	AC – A600 (720VA Max.) DC – 110V Max. 1 Amp Max.
LED PILOT LIGHT	
LED Life	10 <sup>6</sup> Output Hours
Rated Voltage	12V to 254V AC/DC 0-60 Hz
Rated Current	14 mA at 24V DC
Rated Power	0.6W

\*For lower energy use gold plated contacts, available on request.

#### Enclosure Type Rating For Installation

Area Classification of Use	Illuminated Pushbutton with Lead
Class I Zone 1	Enclosure Type 1, 2, 3, 3R, 4, 4X, 12 or 13
Class I Division 2 Groups A, B, C, & D	Enclosure Type 1, 2, 3, 3R, 4, 4X, 12 or 13

Terminate in "Increased Safety" Enclosure.

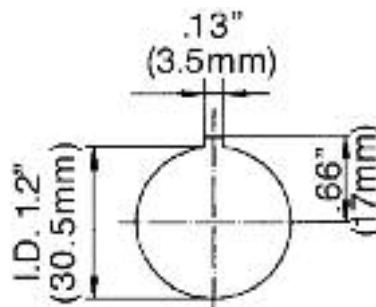

Knockout for 8018



#### CLASSIFICATIONS

NEC- Class I, Zone 2, AEx nC IIC T6  
Class I, Division 2, Groups A,B,C,D  
Class I, Zone 1, contact factory

CEC- Class I, Zones 1 & 2, Ex dm IIC T6  
Class I, Division 2, Groups A,B,C,D



File No. E182378

Environmental Protection 3, 4, 4X; IP66  
depending on enclosure (see table –  
"Enclosure Type Rating For Installation")



II 2 D Ex tD A21 IP66 T80°C  
PTB 02 ATEX 2129X  
IP66 depending on enclosure

Ambient Temperature Range:  
+60°C (+140°F) Max.  
-30°C (-22°F) Min.

IECEx

Ex d mb IIC T6  
Ex tD A21 IP66 T80°C  
IECEx PTB 07.0011 X

#### Ordering Information

Description	Wire Connections	CATALOG NUMBER
Illuminated Pushbutton Spring Return 1 NC and 1 NO		8018/3113-al-6
Illuminated Pushbutton Spring Return 2 NC		8018/3123-al-6
Illuminated Pushbutton Spring Return 2 NO		8018/3133-al-6



#### FEATURES:

The illuminated Pushbutton for panel mounting Series 8018/3 combines control and indicating functions. One actuator operates two contacts and simultaneously can indicate their actual operating status by means of an LED. All illuminated Pushbuttons are spring return action and come with a clear bezel and five colored snap-in filter disks, red, amber, green, blue and white. All disks are included in the package for the user to choose from.









ACCESSORIES AND SPARE PARTS




**Ordering Information**



DESIGNATION	ILLUSTRATION	DESCRIPTION	CATALOG NUMBER
<b>Spare Keys</b>		For all key-operated buttons/ key-operated switches Standard version MS 1 Special key, specify number	<b>3746050</b> <b>3746060</b>
<b>Pushbutton Legend Disks</b>		Blank, Legend Disk Blue Blank, Legend Disk Amber Blank, Legend Disk Red Blank, Legend Disk Green Blank, Legend Disk White Blank, Legend Disk Black Red, Legend Disk "STOP" Green, Legend Disc "START" Red, Legend Disk "OFF" Green, Legend Disk "ON" Green, Legend Disk "I" Green, Legend Disk "II" Red, Legend Disk "O" Red, Legend Disk Arrow Black, Legend Disk "UP" Black, Legend Disk "DOWN" Black, Legend Disk "RUN" Black, Legend Disk "SLOW" Black, Legend Disk "FAST" Black, Legend Disk "CLOSE" Black, Legend Disk "OPEN" Black, Legend Disk "AUTO" Black, Legend Disk "RIGHT" Black, Legend Disk "LEFT" Black, Legend Disk "HAND" Black, Legend Disk "RESET" Black, Legend Disk "OFF-ON" Black, Legend Disk Arrow Black, Legend Disk Arrow	<b>86 029 34 85 6</b> <b>86 029 35 85 6</b> <b>86 029 30 85 6</b> <b>86 029 31 85 6</b> <b>86 029 33 85 6</b> <b>86 029 32 85 6</b> <b>86 029 03 84 0</b> <b>86 029 09 84 0</b> <b>86 029 05 84 0</b> <b>86 029 06 84 0</b> <b>86 029 07 84 0</b> <b>86 029 08 84 0</b> <b>86 029 02 84 0</b> <b>86 029 01 84 0</b> <b>86 029 32 85 0</b> "UP" <b>86 029 32 85 0</b> "DOWN" <b>86 029 32 85 0</b> "RUN" <b>86 029 32 85 0</b> "SLOW" <b>86 029 32 85 0</b> "FAST" <b>86 029 25 84 0</b> <b>86 029 23 84 0</b> <b>86 029 32 85 0</b> "AUTO" <b>86 029 32 85 0</b> "RIGHT" <b>86 029 32 85 0</b> "LEFT" <b>86 029 32 85 0</b> "HAND" <b>86 029 32 85 0</b> "RESET" <b>86 029 32 85 0</b> "OFF-ON" <b>86 029 11 84 0</b> <b>86 029 12 84 0</b>
<b>Inserts</b>		HAND 0 AUTO OFF • ON O/OFF I/ON blank 1 line text blank 2 lines text	<b>86 029 09 85 0</b> <b>86 029 08 85 0</b> <b>86 029 01 85 0</b> <b>86 029 10 85 0</b> <b>86 029 24 85 0</b>
<b>Legend Frames</b>		One-line Legend Frame Blank, One-line Insert Two-line Legend Frame Blank, Two-line Insert Three-line Legend Frame Blank, Three-line Insert	<b>86 029 04 80 0</b> <b>86 029 10 85 0</b> <b>86 029 07 80 0</b> <b>86 029 24 85 0</b> <b>86 029 20 80 0</b> <b>86 029 40 85 0</b>
<b>Actuator</b>		for illuminated pushbutton (spring-return)	<b>86 020 24 03 0</b>
<b>Color Filter</b>		Snap-in Color Filters white red amber green blue	<b>86 029 25 58 0</b> <b>86 029 26 58 0</b> <b>86 029 27 58 0</b> <b>86 029 28 58 0</b> <b>86 029 29 58 0</b>
<b>Close-up Plug</b>		To close-up unused mounting holes I.D. 1.2" (30.5mm)	<b>86 028 01 58 7</b>




### DIMENSIONS

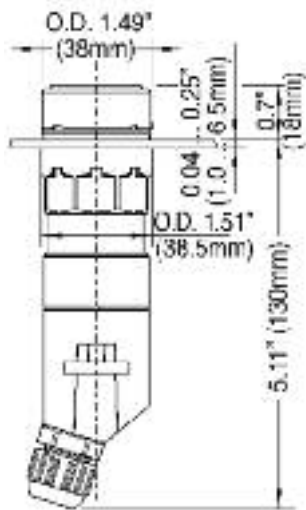


8003/1•1-001 Momentary Pushbutton with Cage Clamps & Cap




8003/1•2-001 Momentary Pushbutton with Cage Clamps




8003/1••-003, -010, -012 Mushroom Buttons  
Mushroom E-STOP Button




8003/1••-006, Mushroom Black Key Button  
8003/1••-009, E-STOP Red Mushroom, Key Button




8003/1••-726, Control Switch Handle Non-Lockable




8003/1••-015 E-STOP Red Mushroom Pushbutton




8003/1••-008 Key Operated Switch




8003/1••-727, Control Switch Handle Pad-Lockable

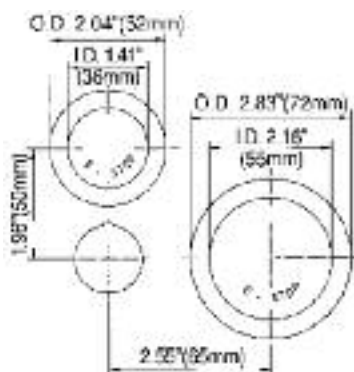


Standard Knock-out Distance for Jumbo E-STOP Button (8003/1••-015 Mushroom Maintained)

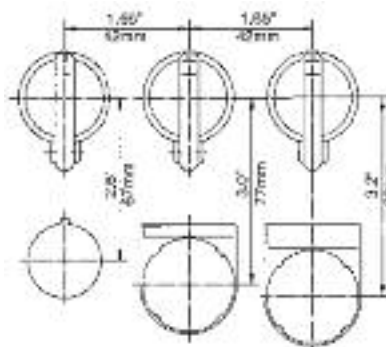


Standard Knock-out Distance with / without Legend Frame

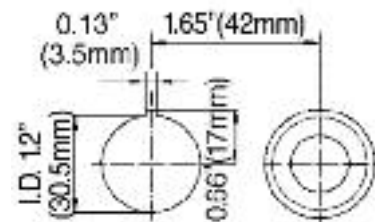


Knock-out Distance for Aligning Several devices with O.D. 1.49\"(38mm) in a Panel

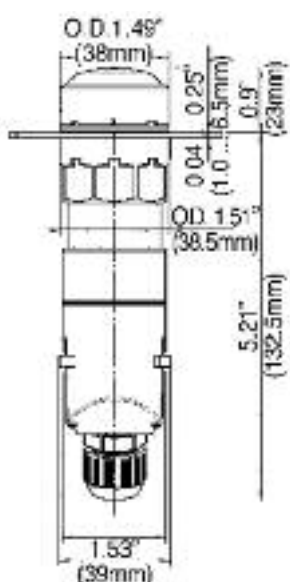

8013/3•1 Pilot Light with Cap

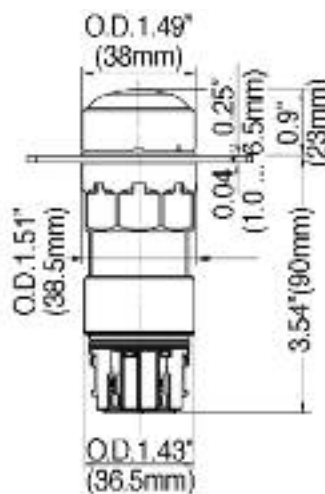

8013/3•2 Pilot Light without Cap

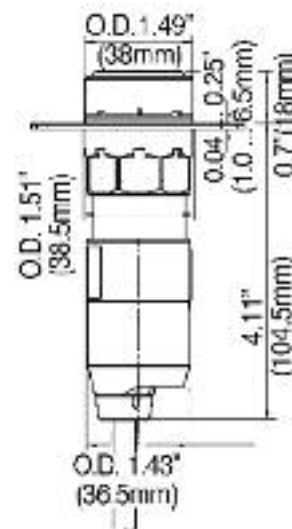

8018 Illuminated Pushbutton with Lead



## CLASSIFICATIONS

For Pilot Light 8010/2 and Bezel 8602  
 NEC- Class I, Zones 1 & 2, AEx de IIC T6  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Division 2, Groups F,G  
 Class III

File No. E182378

Class I, Zones 1 & 2, Ex de IIC T6  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III

Certified File No. LR99480

II 2G Ex de IIC  
 PTB 01 ATEX 1160 U  
 PTB 01 ATEX 1129 U

## CLASSIFICATIONS

For I. S. Pilot Light 8010/3 and Bezel 8602  
 NEC- Class I, Zone 0, AEx ia/ib IIB T4  
 Class I, Zone 1, AEx ia/ib IIC T4  
 Class I, Division 1, Groups A,B,C,D

CEC- Class I, Zone 0, Ex ia/ib IIB T4  
 Class I, Zone 1, Ex ia/ib IIC T4  
 Class I, Division 1, Groups A,B,C,D

File Nos. E81680 and E182378

II 2G Ex d ia/ib IIC  
 PTB 01 ATEX 1160 U  
 PTB 01 ATEX 1129 U

IECEx  
 Ex d ia/ib IIC  
 IECEx PTB 06.0016 U  
 IECEx PTB 06.0016 U

Ambient Temperature Range:  
 +55°C (+131°F) Max.  
 -25°C (-13°F) Min.

Environmental Protection 3, 4, 4X; IP66  
 front, depending on enclosure (see table –  
 “Enclosure Type Rating For Installation”)

## FEATURES:

The 8415 Pilot Light assembly consists of an LED/power pack 8010/3, one mounting bracket and one bezel/lens assembly. Five different colors are available: red, green, amber, white and blue.

The 8415 Pilot Light assemblies are available for power circuits – and intrinsically safe circuits. The types for power applications 8415/24 are capable to work on voltages between 12V up to 254V AC/DC.

The types 8415/24-50 are for connection with intrinsically safe circuits only, and operate safely within the values stated in the above table “Intrinsic Safety Rating Entity Parameters”.

The installation should be in accordance with ANSI/ISA RP 12. 06. 01. and control drawing 80 106 01 31 3.


Recommended Barrier:  
 9002/13-252-121-041.



## 8415 LED PILOT LIGHT ASSEMBLY

### Technical Data

Mechanical/Electrical Life	10 <sup>5</sup> Output Hours
Rated Voltage - Standard	12V to 254V AC or DC 0-60 Hz
Voltage Tolerance	-10% +6%
Rated Voltage - I. S.	10.8V to 28V AC or DC
Rated Current	15 mA at 24V DC
Rated Power	1W max.
Colors	red, amber, green, blue and white
Terminal Capacity	2 x 12 AWG (2.5mm <sup>2</sup> )
Enclosure Knock-out	30.5 mm or 1.2" I.D.
Enclosure/Lens Material	Polyamide



Knockout for 8415

Intrinsic Safety Ratings Entity Parameters	
V max	28V
I max	150 mA
P max	1W
Li	0
Ci	0

### Enclosure Type Rating For Installation

Area Classification of Use	Pilot Light
Class I Zone 1	Enclosure AEx e/Ex e
Class I Div. 1, Zone 0 I.S.	Enclosure Type 1, 2, 3, 3R, 4, 4X, 12, 13
Class I Division 2 Groups A, B, C, D	Enclosure Type 1, 2, 3, 3R, 4, 4X, 12, 13
Class II Division 1 Groups E, G	Enclosure Type 3, 4, 4X, 9, 12, 13
Class II Division 2 Groups E, G	Enclosure Type 3, 4, 4X, 12, 13
Class III	Enclosure Type 3, 4, 4X, 12, 13

### Ordering Information

PILOT LIGHT	LENS COLORS	CATALOG NUMBER
Standard 12V – 10% to 254V + 6% AC/DC	red	<b>8415/24-R-9</b>
	green	<b>8415/24-G-9</b>
	amber	<b>8415/24-A-9</b>
	white	<b>8415/24-W-9</b>
	blue	<b>8415/24-B-9</b>
For I.S. Circuits 10.8-28V AC/DC	red	<b>8415/24-50-R-9</b>
	green	<b>8415/24-50-G-9</b>
	amber	<b>8415/24-50-A-9</b>
	white	<b>8415/24-50-W-9</b>
	blue	<b>8415/24-50-B-9</b>

## 8703 PUSHBUTTON ASSEMBLY

### Contact Block Information

DESCRIPTION	CONTACT SYMBOL		INDIVIDUAL ORDER CATALOG NUMBER
	IEC	NEMA	
Single contact block, 1 NC			8082/1-1-00
Single contact block, 1 NO			8082/1-2-00


### Technical Data of Contact Block

	NEC/CEC	IEC
Rated Voltage	600VAC	500VAC
Continuous Current	10A	6A
Terminals	12AWG	2.5mm <sup>2</sup>
Mechanical Life	≥ 10 <sup>6</sup> operations	
Electrical Life	≥ 10 <sup>6</sup> operations	
Housing Material	polyamide	
Contact Material	silver plated	
Lowest Energy	50mA. @ 12V*	



### Enclosure Type Rating For Installation

Area Classification of Use	Pushbutton 8703
Class I Zone 1	Enclosure AEx e/Ex e
Class I Division 2 Groups A, B, C, D	Enclosure Type 1, 2, 3, 3R, 4, 4X, 12, 13
Class II Division 2 Groups F, G	Enclosure Type 3, 4, 4X, 12, 13
Class III	Enclosure Type 3, 4, 4X, 12, 13



Knockout for 8703

### Ordering Information

PUSHBUTTON CONTACTS	CATALOG NUMBER
1 NC	8703/01 - pp - 9
1 NO	8703/02 - pp - 9
1 NC / 1 NO	8703/12 - pp - 9
2 NC	8703/11 - pp - 9
2 NO	8703/22 - pp - 9

Fill out the blanks in the Catalog Number with the information found on pages F7 or F8 in the column "ACTUATOR CODE" (actuator code 23 not possible).



### CLASSIFICATIONS for Contact Block 8082/1 and Actuator 8602

NEC- Class I, Zones 1 & 2 AEx de IIC T6  
Class I, Division 2, Groups A,B,C,D  
Class II, Division 2, Groups F,G  
Class III  
Environmental Protection 3, 4, 4X;  
IP66 Front, depending on enclosure  
(see table - "Enclosure Type Rating For Installation")



File No. E182378

CEC- Class I, Zones 1 & 2 Ex de IIC T6  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 2, Groups F,G  
Class III



CERTIFIED - FILE No. LR99480



II 2 G Ex de IIC  
PTB 00 ATEX 1031 U  
PTB 01 ATEX 1129 U

Ambient Temperature Range:  
+55°C (+131°F) Max.  
-25°C (-13°F) Min.

IECEX


Ex de IIC  
IECEX PTB 06.0011 U  
IECEX PTB 06.0014 U

### FEATURES:

The 8703 pushbutton assembly consists of contact block(s) 8082/1, one mounting bracket and one actuator 8602 - as listed on page F7.

The contact blocks have a single contact either 1 NC or 1 NO.

The terminals are accessible from the front, therefore the wires need to be connected before the contact block is snapped into the bracket.

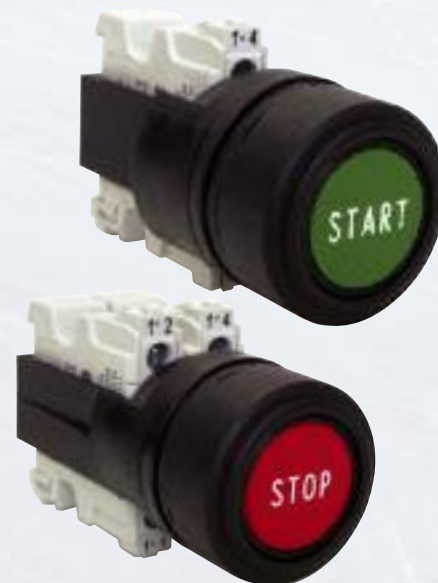

Lined area for notes, consisting of approximately 30 horizontal lines.

# ConSig 8040 Series

CONTROL & SIGNALING STATIONS



CONTROLS


STAHL

## 8040 Features:

- *Attractive space efficient design.*
- *A variety of enclosure sizes made of Fiberglass Reinforced Polyester (FRP).*
- *Snap-on mounting of individual components.*
- *High illumination LED pilot light from 12V to 254V, AC or DC with an operating life time over 100,000 hours.*
- *A variety of pushbuttons.*
- *Control switches.*
- *Illuminated pushbutton.*
- *Durable EPDM enclosure gaskets are concealed to protect from damage or premature aging by UV light and chemicals.*
- *Fluorsilicate gasket in standard pushbutton actuators is suitable for a wide temperature range.*

# ConSig "PUTS YOU IN CONTROL"

R. STAHL is setting new standards for function, design and technology with the new ConSig 8040 Series of control and signaling stations. Designed for complex industrial conditions and rough operation, the new ConSig 8040 system combines functionality with an attractive, modular design. The wide variety of UL Listed/CSA Certified control and signaling devices can be supplied, providing the ultimate in flexibility to meet the most demanding application requirements.

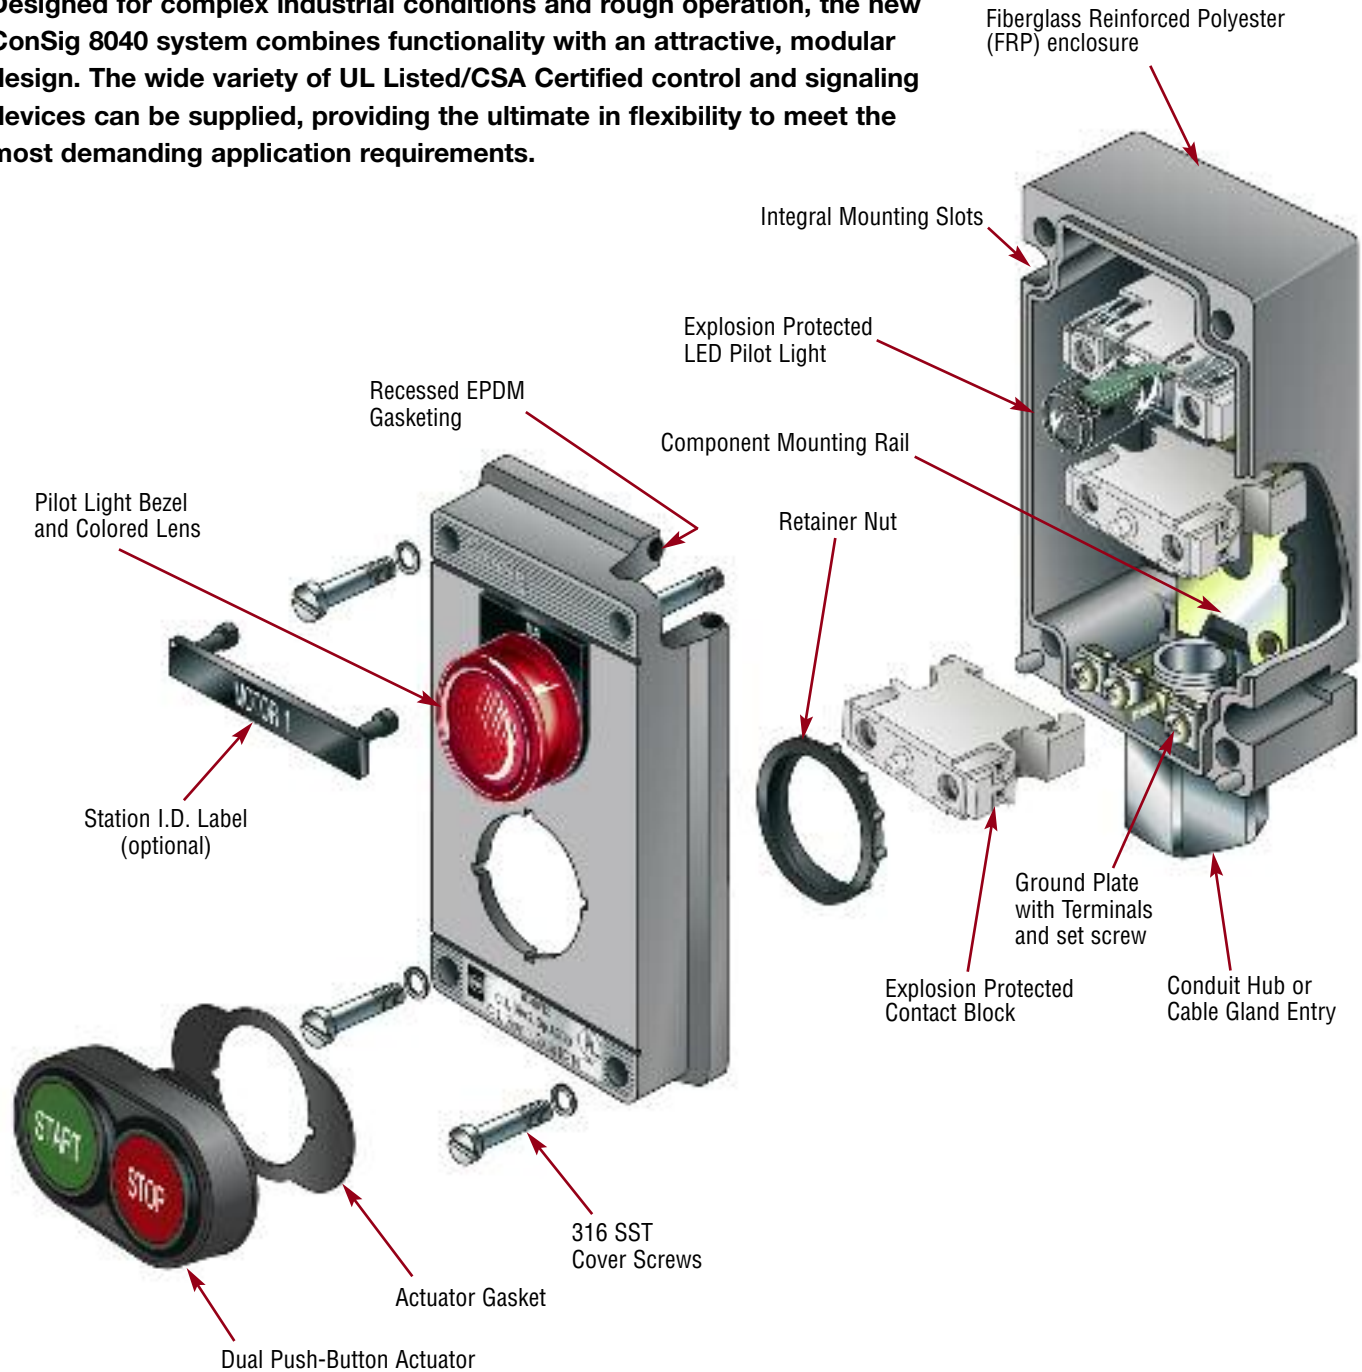

The ConSig 8040 Series is a new generation of control and signaling stations utilizing explosion protected components with non-metallic control housings for the ultimate flexibility, safety and durability in Hazardous (Classified) and Hostile (Corrosive) Locations.


This control and signaling station utilizes snap-on mounted components making field assembly quick and easy. Components include contact blocks with a variety of actuator options, LED pilot lights in all of the standard colors and voltages from 12V to 254V AC/DC, 2-pole and 4-pole control switches configurations and direct or indirect reading ammeters.

### Enclosures

ConSig 8040 Series can be specified as one, two or three gang configurations and is made of Fiberglass Reinforced Polyester (FRP). Enclosure gasketing is durable EPDM which is concealed to protect it from premature aging by UV light and chemical elements. Components snap-on to the rail provided.

### Contact Blocks

The contact system incorporates 8082 Series contact blocks which are individually explosion protected single pole units and are available as 1 N.O. or 1 N.C. The contact blocks incorporate a parallel bridge contact (H-contact) designed to ensure utmost contact reliability even with very low control voltages and currents. Any combination can be installed to provide a complete range of control configurations. Standard actuator styles include a double push-button, booted pushbutton and illuminated pushbutton.

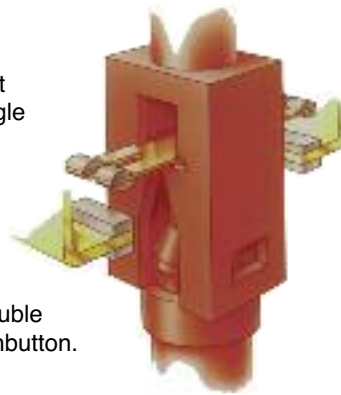

### LED Pilot Lights

ConSig 8040 Series introduces an extraordinary compact LED pilot light unit. The 8010 Series pilot light incorporates electronics which allow the same unit to operate at any voltage from 12 to 254 Volts, DC to 60 Hz. High output LEDs are used to provide superior illumination levels which are visible in direct sunlight from the front or side. The bezel is clear and the snap-on lenses are added in the colors Red, Green, Amber, White and Blue!

### Control Switches

8008 Series control switches offer over 300 different switching configurations. They are available as 2-pole and 4-pole units incorporating maintained or spring return action. The control switch is for quick and easy snap-on mounting. Three styles of handles, with or without padlocking provision can be used in conjunction with the switches.

### Illuminated Push-Buttons

Illuminated push-buttons make it possible to have control and signaling functions in the space of one. This is achieved by combining the 8082 Series Contact Blocks and 8010 Series LED Pilot Lights under a special illuminated pushbutton actuator which is spring return with a clear bezel and five colored snap-in filter disks in Red, Green, Amber, White and Blue.



### Ammeters

ConSig 8040 Series offers a cost effective ammeter station as a solution for applications in a Hazardous (Classified) Location. The 8405 Series ammeter is a moving iron core instrument available in direct or indirect read versions. A manually adjustable red pointer provides quick and easy comparison of the actual circuit operation. The ammeter is for quick and easy snap-on mounting.



### CLASSIFICATIONS

NEC- Class I, Zones 1 & 2 AEx de IIC T6  
Class I, Division 2, Groups A,B,C,D  
Class II, Division 2, Groups F,G  
Class III

Enclosure Type 3,4 & 4X; IP66  
FILE No. E182378

CEC- Class I, Zones 1 & 2 Ex de IIC T6  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 1 & 2, Groups E,F,G  
Class III

CSA ENCLOSURES 3, 4 & 4X; IP66  
CERTIFIED - FILE No. LR99480

II 2 G Ex de IIC T6  
II 2 D Ex tD A21 IP66 T80°C  
PTB 01 ATEX 1105

### IECEx

Ex de IIC T6  
Ex tD A21 IP66 T80°C  
IECEx PTB 06.0025

### Ambient Temperature Range:

+40°C (+104°F) Max.  
-20°C (-4°F) Min.

### Special Ambient Temperature Range:\*

+60°C (+140°F) Max.  
-50°C (-58°F) Min.

\*Consult Factory



PRE-CONFIGURED CONTROL STATIONS



**Ordering Information**

FUNCTION	CONTACT SYMBOL		CATALOG NUMBER
	IEC	NEMA	
"START" Green Momentary Pushbutton, 1 NO		START 	8040/114 - X011
"STOP" RED Momentary Pushbutton, 1NC		STOP 	8040/114 - Y012
"E-STOP" SMALL RED Maintained Mushroom, 1 NC		STOP 	8040/114 - Y100
"E-STOP" JUMBO RED Maintained Pushbutton, 1 NC		STOP 	8040/114 - Y150
"E-STOP" Keyed Maintained Red Mushroom, 1 NC		STOP 	8040/114 - Y090
"OFF - ON" Selector Switch 2-Position/10 Amps		OFF    ON 	8040/114 - 02MN1
"LOCAL REMOTE" Selector Switch 2-Positions/10 Amps		LOCAL    REMOTE 	8040/114 - U2MN4
"Hand - 0 - Auto" Maintained Selector Switch 3-Positions/10 Amps		HAND    0    AUTO 	8040/114 - 03MMN3
"START-STOP" Double PB Momentary 1 NO / 1 NC		START    STOP 	8040/114 - U2312
"PILOT LIGHT" RED LED 12V-254V AC / DC			8040/114 - PLR0
"PILOT LIGHT" GREEN LED 12V-254V AC / DC			8040/114 - PLG0

All above stations include one 3/4" hub bottom.



## PRE-CONFIGURED CONTROL STATIONS

### Ordering Information

FUNCTION			CONTACT SYMBOL		CATALOG NUMBER
①	②	③	IEC	NEMA	
RED LED Pilot Light 12V-254V AC / DC	----	----			8040/124 - PLR0
"START" Green Momentary Pushbutton 1 NO / 1 NC	----	----			8040/124 - U011
"E-STOP" RED JUMBO Mushroom Maintained 2 NC	----	----			8040/124 - C150
"OFF - ON" Maintained Control Switch 2-Pos./2-Pole 10 amps	----	----		OFF ON 	8040/124 - N021
RED LED Pilot Light 12V-254V AC / DC	"OFF-ON" Maintained Control Switch 2-Pos./2-Pole 10 amps	----		OFF ON 	8040/224 - PLR0-N021
"H - O - A" Maintained Control Switch 3-Pos./2-Pole 10 amps	----	----		HAND OFF AUTO 	8040/124 - N273
"LOCAL REMOTE" Control Switch 2-Positions 10 amps	----	----		LOCAL REMOTE 	8040/124 - N164
"STOP-RUN START" Control Switch 3-Pos./2-Pole Spring Return From Right 10 amps	----	----		STOP RUN START 	8040/124 - N385
"START" Momentary Green Pushbutton 1 NO / 1 NC	"STOP" Momentary Red Pushbutton 1 NO / 1 NC	----		START STOP 	8040/224 - U011-U012
RED LED Pilot Light 12V- 254V AC / DC	"START-STOP" Double PB Momentary 1 NO / 1 NC	----		START STOP 	8040/224 - PLR0-U2312
RED LED Pilot Light 12V-254V AC / DC	"Start" Green Momentary Pushbutton 1 NO / 1 NC	"STOP" Red Momentary Pushbutton 1 NO / 1 NC		START STOP 	8040/3 34 - PLR0-U011-U012

All above stations include one 3/4" hub bottom.





### Start Here

<b>ConSig</b> Control Station <b>8040/</b>
--

Enclosure	
Enclosure Size ( ___ )	Entry or Entries ( ___ )

### CLASSIFICATIONS

**NEC-** Class I, Zones 1 & 2 AEx de IIC T6  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Division 2, Groups F,G  
 Class III  
 Enclosure Type 3, 4 & 4X; IP66  
**FILE No. E182378**

**CEC-** Class I, Zones 1 & 2 Ex de IIC T6  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III  
**CSA ENCLOSURES 3, 4 & 4X; IP66**  
**CERTIFIED - FILE No. LR99480**

See page F2

IECEX See page F2

**HOUSING MATERIAL AND GASKETING**  
 Fiberglass Reinforced Polyester (FRP)  
 with EPDM recessed gasketing.

### FEATURES

The ConSig 8040 Series of control & signaling stations with its many enclosure sizes and components is uniquely flexible. If the preconfigured control stations on pages F3 and F4 do not meet your specific application needs, take advantage of the flexibility of ConSig 8040 and use the custom configuration logic tables on the right to custom configure a control station which can exactly meet your particular application.

### How to use configuration logic tables:

Fill in the blanks in the light blue striped fields located on the top of pages F5 and F6 left to right from information stated below the individual fields.

**Step 1:** Select enclosure size

**Step 2:** Select entry or entries

**Step 3:** Select the device mounted to the cover as well as the device mounted into the back box.

**Step 4:** Repeat step 3 when configuring a two-gang station.

**Step 5:** Repeat step 3 when configuring a three-gang station.

### DIMENSIONS

For dimensional data see page F15.

**11**  
 1-device  
 Compact

**12**  
 1-device  
 Expanded

**22**  
 2-device

**64**  
 2-device  
 Expanded

**33**  
 3-device

**42**  
 Ammeter

**54**  
 Ammeter  
 plus  
 1-device

**73** One  
 4 Pole  
 switch  
 Deep

**84** Two  
 4 Pole  
 switch  
 Deep

**94**  
 Ammeter  
 1- 4 Pole  
 switch  
 Deep

### Entry Type:

#### Conduit Hub

- 0** = 1/2" Hub Top Feed
- 1** = 1/2" Hub Bottom Feed
- 2** = 1/2" Hub Feed-Thru
- 3** = 3/4" Hub Top Feed
- 4** = 3/4" Hub Bottom Feed
- 5** = 3/4" Hub Feed-Thru

#### Compression Gland - FOR IEC CENELEC

- 6** = M25 Gland Top Feed
- 7** = M25 Gland Bottom Feed
- 8** = M25 Gland Feed-Thru
- 9** = Special

#### Threaded Opening - In Internal Ground Plate

- A** = 1/2" NPT plate Top Feed
- B** = 1/2" NPT plate Bottom Feed
- C** = 1/2" NPT plate Feed-Through
- D** = 3/4" NPT plate Top Feed
- E** = 3/4" NPT plate Bottom Feed
- F** = 3/4" NPT plate Feed-Through
- G** = 1/2" NPT plug Feed-Through
- H** = 3/4" NPT plug Feed-Through
- L** = M20 Plate Bottom Feed
- M** = M25 Plate Bottom Feed

#### Other Special Entries

##### Non-Metallic Cable Glands

- J** = M20 Gland Bottom Feed
- K** = M20 Gland Feed-Through

##### Metal Clad Cable Connectors

- Q** = MCR050 Bottom Feed
- V** = MCR075 Bottom Feed

##### 8040 Control Station Coupling

- Z** = Coupling Frame Bottom



## CUSTOM CONFIGURATION LOGIC

Device Specification (1, 2 or 3 devices described from top to bottom)		
First or only position (_____)	—	Second position (_____)
	—	Third position (_____)

PUSHBUTTONS		
<b>Contact type</b> <b>X</b> = 1 N.O. <b>Y</b> = 1 N.C. <b>U</b> = 1 N.O./ 1 N.C. <b>O</b> = 2 N.O. <b>C</b> = 2 N.C. <b>M</b> = 2 N.C./ 1 N.O. <b>W</b> = 1 N.C./ 2 N.O. <b>T</b> = 3 N.C. <b>R</b> = 3 N.O. <b>D</b> = 2 N.O./ 2 N.C. only with actuator 23 in enclosures 12, 54 & 64	<b>Actuator type</b> <b>01</b> = Standard Momentary <b>02</b> = Booted Momentary <b>03</b> = Black Momentary small Mushroom <b>09</b> = Keyed E-STOP Red Mushroom Maintained <b>10</b> = E-STOP Red small Mushroom Maintained <b>12</b> = Black small Mushroom Maintained <b>13</b> = Red small Mushroom Maintained <b>15</b> = Emergency STOP Red Jumbo Mushroom Maint. <b>23</b> = Double Pushbutton Momentary <b>P733</b> = Device Close-up Plug	<b>Legend</b> <b>0</b> = none <b>1</b> = START <b>2</b> = STOP <b>3</b> = ON <b>4</b> = OFF <b>5</b> = RUN <b>6</b> = RESET <b>7</b> = OPEN <b>8</b> = CLOSE <b>9</b> = special (specify from F14)

SELECTOR SWITCHES			
<b>X</b> = 1 N.O. <b>Y</b> = 1 N.C. <b>U</b> = 1 N.O./ 1 N.C. <b>O</b> = 2 N.O. <b>C</b> = 2 N.C.	<b>2SK</b> <b>2MK</b> <b>3SSK</b> <b>3MMK</b> <b>3SMK</b> <b>3MSK</b>	<b>2SN</b> <b>2MN</b> <b>3SSN</b> <b>3MMN</b> <b>3SMN</b> <b>3MSN</b>	<b>2SL</b> <b>2ML</b> <b>3SSL</b> <b>3MML</b> <b>3SML</b> <b>3MSL</b>


**Note:** For Actuator Descriptions see page F8

PILOT LIGHTS		
<b>PL</b>	<b>Color</b> <b>A</b> = amber <b>B</b> = blue <b>G</b> = green <b>R</b> = red <b>W</b> = white	<b>Legend</b> Same # as pushbutton

CONTROL SWITCHES		
<b>Actuator type</b> <b>N</b> = Non-lockable <b>S</b> = Small-lockable <b>L</b> = Large lockable	<b>Switch arrangements 2 pole</b> <b>02</b> = 2-pos. Maintained (OFF-ON) <b>05</b> = 2-pos. Maintained (ON-OFF) <b>16</b> = 2-pos. Maintained (LOCAL-REMOTE) <b>27</b> = 3-pos. Maintained (HAND-O-AUTO) <b>38</b> = 3-pos. Maint., Spring Return from Right (OFF-RUN-START) <b>Switch arrangements 4 pole</b> <b>102</b> = 2-pos. OFF-ON <b>106</b> = 2-pos. LOCAL-REMOTE } only for deep enclosures 73, 84 & 94 <b>119</b> = 3-pos. HOA } For more switching arrangements see pgs. F11 and F12.	<b>Legend</b> <b>0</b> = none <b>1</b> = OFF-ON <b>2</b> = ON-OFF <b>3</b> = HAND-O-AUTO <b>4</b> = LOCAL-REMOTE <b>5</b> = STOP-RUN-START <b>6</b> = O - I <b>7</b> = blank one line text <b>8</b> = blank two lines text <b>9</b> = special (specify)

ILLUMINATED PUSHBUTTONS			
<b>Spring Return</b> <b>SR</b> = <b>SG</b> = <b>SA</b> = <b>SW</b> = <b>SB</b> =	<b>Colors</b> red green amber white blue	<b>Contact type</b> <b>X</b> = 1 N.O. <b>Y</b> = 1 N.C. <b>U</b> = 1 N.O. / 1 N.C. <b>O</b> = 2 N.O. <b>C</b> = 2 N.C.	<b>Legend</b> Same # as pushbuttons

**Example**  
8040/334 - PLR0 - U2312 - Y090

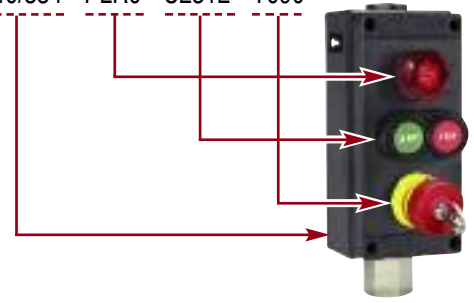

PUSHBUTTON LOCKOUTS/GUARDS
<b>LK01</b> = Momentary Lockout (01 & 02) <b>LK02</b> = Momentary Exclusion (01 & 02) <b>LK03</b> = Small Mushroom Guard (03,10,12 & 13) <b>LK10</b> = Small Mushroom Lockout (03,10,12 & 13) <b>LK11</b> = Small Mushroom Pin & Chain Lockout (03,10,12, 13 & 15) <b>LK20</b> = Small Mushroom Exclusion Lockout (03,10,12 & 13) <b>LK21</b> = Momentary Pushbutton (01 & 02) exclusion <b>LK23</b> = Double Pushbutton Lockout, 1-device (23)

POTENTIOMETERS	
Dial Increments	Resistance (Ohm) Range
<b>P1</b> = 0-10 scale	<b>01</b> = 100Ω <b>06</b> = 4.7 kΩ <b>11</b> = 220 kΩ <b>02</b> = 220Ω <b>07</b> = 10 kΩ <b>12</b> = 470 kΩ <b>03</b> = 470Ω <b>08</b> = 22 kΩ <b>13</b> = 1 MΩ <b>04</b> = 1 kΩ <b>09</b> = 47 kΩ <b>14</b> = 2.2 MΩ <b>05</b> = 2.2 kΩ <b>10</b> = 100 kΩ <b>15</b> = 4.7 MΩ
<b>P2</b> = 0-100 scale	
<b>P6</b> = 0-6 scale	

AMMETERS	
Direct reading (2X overload): <b>AD....</b>	<b>Scales</b> <b>0-0.02/0.04A</b> <b>0-1/2A</b> <b>0-4/8A</b> <b>0-10/20A</b> <b>0-15/30A</b>
Indirect reading for Current Transformer (5X overload): <b>A1....</b> ← For 1 AMP C.T.	<b>0-1/5</b> <b>0-50/250</b> <b>0-2/10</b> <b>0-75/375</b> <b>0-5/25</b> <b>0-100/500</b> <b>0-10/50</b> <b>0-150/750</b> <b>0-15/75</b> <b>0-200/1000</b> or <b>A5....</b> ← For 5 AMP C.T.
<b>A5....</b> ← For 5 AMP C.T.	<b>0-20/100</b> <b>0-250/1250</b> <b>0-30/150</b> <b>0-300/1500</b> <b>0-40/200</b>

**Ammeter Example:**  
8040/424-A1 20/100, Ammeter for CT 1AMP,  
Scale 0-20/100A in  
Enclosure Size 42 with 3/4" NPT Bottom Hub.



### APPROVALS

- FILE No. E182378
- CERTIFIED - FILE No. LR99480
- PTB 01 ATEX 1129 U
- IECEX PTB 06.0014 U

STAHL offers a large variety of push-button actuator versions including momentary and maintained action in standard, booted, mushroom, keyed and selector switch styles. A new double push-button actuator combines two control functions in the space of one with the same size button.

Up to three 8082 contact blocks can be mounted under each push-button actuator. Under the double momentary push-button 23, up to four 8082 contact blocks can be mounted. Legend disks, in a variety of standard markings, snap into the center of the actuator making the button function easily identifiable.



## PUSH BUTTON ACTUATORS

### Ordering Information

ACTUATOR DESCRIPTION	INDIVIDUAL ORDER CATALOG NUMBER	ASSEMBLY CODE		
		CONTACT BLOCK	ACTUATOR CODE	LEGEND DISK
<b>Standard Momentary Pushbutton</b> 1.5" (38mm) O.D. Legend disks to be ordered separately, see page F14.	<b>8602A0001-1-S</b>		01 __	0 = none
<b>Booted Momentary Pushbutton</b> 1.5" (38mm) O.D. Legend disks to be ordered separately, see page F14.	<b>8602A0002-1-S</b>	M = 2 x NC 1 x NO	02 __	1 = START
<b>Double Momentary Pushbutton</b> 1.5" (38mm) O.D. Legend disks to be ordered separately, see page F14.	<b>8602A0023-1-S</b>	W = 1 x NC 2 x NO	23 __	2 = STOP
<b>Black Mushroom Pushbutton</b> 1.5" (38mm) O.D. Momentary action. Legend disks to be ordered separately, see page F14.	<b>8602A0003-1-S</b>	T = 3 x NC	03 __	3 = ON
<b>Emergency Stop Red Pushbutton</b> 1.5" (38mm) O.D. Maintained action. Turn-to-Release. Arrow disk and yellow washer supplied.	<b>8602A0010-1-S</b>	R = 3 x NO  X = 1 x NO	10 __	4 = OFF  5 = RUN
<b>Maintained Black Mushroom Pushbutton</b> 1.5" (38mm) O.D. Maintained action. Turn-to-Release. Red arrow disk included	<b>8602A0012-1-S</b>	Y = 1 x NC	12 __	6 = RESET
<b>Maintained Red Mushroom Pushbutton</b> 1.5" (38mm) O.D. Maintained action. Turn-to-Release. Legend disks to be ordered separately, see page F14.	<b>8602A0013-1-S</b>	U = 1 NO + 1 NC	13 __	7 = OPEN
<b>Emergency Stop (Jumbo) Red Pushbutton</b> 2.16" (55mm) O.D. Maintained action. Turn-to-Release. Arrow disk and yellow washer supplied.	<b>8602A0015-1-S</b>	O = 2 x NO  C = 2 x NC	15 __	8 = CLOSE
<b>Emergency Stop Red Mushroom</b> 1.5" (38mm) O.D. Maintained action. Key-to-Release from maintained position. Arrow disk and yellow washer supplied.	<b>8602A0009-1-S -MS1</b>	D = 2 x NC 2 x NO	09 __	9 = special (state text w/order)

Only possible under double pushbutton 23 in enclosures 12, 54 & 64.




## SELECTOR SWITCH ACTUATORS

### Ordering Information



ACTUATOR DESCRIPTION	INDIVIDUAL ORDER CATALOG NUMBER	ASSEMBLY CODE		
		CONTACT BLOCK(S)	ACTUATOR CODE	LEGEND
Key Operated Switch - 2 Positions	<b>8602A0008-1-2-r-V-MS1</b>		__2SK__	0 = none
			__2MK__	1 = OFF-ON
Key Operated Switch - 3 Positions	<b>8602A0008-1-3-rr-V-MS1</b>	X = 1 x NO	__3SSK__	2 = ON-OFF
			__3MMK__	3 = HAND-OFF-AUTO
			__3SMK__	
			__3MSK__	
Rotary Actuator 2 Positions Non-lockable	<b>8602A0726-1-2-r</b>	Y = 1 x NC	__2SN__	4 = LOCAL-REMOTE
Rotary Actuator 3 Positions Non-lockable	<b>8602A0726-1-3-rr-V</b>	U = 1 NO + 1 NC	__2MN__	5 = STOP-RUN-START
			__3SSN__	6 = 0 - I
			__3MMN__	
Rotary Actuator 2 Positions Padlockable in center	<b>8602A0727-1-2-r-V</b>	O = 2 x NO	__3SMN__	7 = blank, one-line text
			__3MSN__	8 = blank, two-lines text
			__2SL__	
Rotary Actuator 3 Positions Padlockable in center	<b>8602A0727-1-3-rr-V</b>	C = 2 x NC	__2ML__	9 = special (specify)
			__3SSL__	
			__3MML__	
			__3SML__	
			__3MSL__	

Replacement actuators include parts to convert maintained positions into spring return and to convert key removable positions into non-removable positions.



\* Standard: Key removable in all maintained positions. Key not removable in all spring return positions.



### APPROVALS

FILE No. E182378

CERTIFIED - FILE No. LR99480

PTB 01 ATEX 1129 U

IECEx

IECEx PTB 06.0014 U





### APPROVALS

FILE No. E182378

CERTIFIED - FILE No. LR99480

PTB 00 ATEX 1031U

IECEX

IECEX PTB 06.0014 U

The contact block Series 8082 are available in two versions.

- 1 NO
- 1 NC

Each block is made of polyamide and designed to contain an internal explosion.

The terminals are designed to increased safety requirements

## 8082 CONTACT BLOCK

### Ordering Information

DESCRIPTION	CONTACT SYMBOL		INDIVIDUAL ORDER CATALOG NUMBER
	IEC	NEMA	
Single contact block, 1 NC			8082/1-1
Single contact block, 1 NO			8082/1-2



### Technical Data

	NEC/CEC	IEC
Rated Voltage	600VAC	500VAC
Continuous Current	10A	6A
Terminals	12AWG	2.5mm <sup>2</sup>
Mechanical Life	≥ 10 <sup>6</sup> operations	
Electrical Life	≥ 10 <sup>6</sup> operations	
Housing Material	polyamide	
Contact Material	silver plated	
Lowest Energy	50mA. @ 12VAC/DC*	

\* For lower energy use gold plated contacts, available on request.

### APPROVALS

FILE No. E81680 (I.S.)

CERTIFIED - FILE No. LR99480

PTB 01 ATEX 1160 U

IECEX

IECEX PTB 06.0016 U

The rail mounted 8010 Series LED Pilot Light accommodates any voltage from 12 to 254V AC or DC in one compact unit!

High intensity LED's provide superior illumination levels that are easily viewable in direct sunlight from the front or side.

Long life & low temperature make these ideal for hazardous location applications.

## 8010 LED Pilot Light

### Ordering Information

	COLORS	SYMBOL		INDIVIDUAL ORDER CATALOG NUMBER	ASSEMBLY CODE
		IEC	NEMA		
PILOT LIGHT	white			8010/2-01-W	Included in ordering code below.
PILOT LIGHT FOR I.S. CIRCUITS 10.8-28V AC/DC				8010/3-02-WS	
BEZEL WITH COLORED LENS	red			86 028 03 58 7 AA	PLR
	amber			86 028 03 58 7 AB	PLA
	green			86 028 03 58 7 AC	PLG
	clear			86 028 03 58 7 AD	PLW
	blue			86 028 03 58 7 AE	PLB

See page F14 for legend plate ordering information.



### Technical Data

	NEC/CEC/IEC
Rated Voltage	12V-10% . . . 254V+6%
Frequency	DC . . . 60Hz.
Rated Current	max. 15mA.
Rated Power	max. 15mW
Electrical Life	100,000 hrs (11yrs)
Colors	Red, Amber, Green, White, Blue
Terminals	2.5mm <sup>2</sup> (12AWG)
Housing Material	polyamide

## 8082/8010 ILLUMINATED PUSHBUTTON

### Ordering Information

	CONTACT SYMBOL		COLOR	INDIVIDUAL ORDER CATALOG NUMBER	ASSEMBLY CODE
	IEC	NEMA			
<b>Contact Arrangement</b>					
1NC + 1 NO			N/A	8602-A0737-1	U
2 NC			N/A	8602-A0738-1	C
2 NO			N/A	8602-A0739-1	O
<b>Actuator</b>					
Spring Return	Includes red, green, amber, white and blue color filter disks		red green amber white blue	8602-A0735-1	SR SG SA SW SB

### Technical Data

8010 Pilot Light	NEC/CEC/IEC	
Rated Voltage	12V-10% . . . 254V+6%	
Frequency	DC . . . 60Hz.	
Rated Current	max. 15mA.	
Rated Power	max. 15mW	
Electrical Life	100,000 hrs. (11 yrs.)	
Colors	Red, Green, Amber, White, Blue,	
Terminals	12AWG (2.5mm <sup>2</sup> )	
Housing Material	polyamide	
8082 Contact Block	NEC/CEC	IEC
Rated Voltage	600VAC	500VAC
Continuous Current	10A	6A
Lowest Energy	50mA @ 12VAC/DC*	

\* For lower energy use gold plated contacts, available on request.



### APPROVALS

FILE No. E182378



CERTIFIED - FILE No. LR99480



PTB 00 ATEX 1031U  
PTB 01 ATEX 1160 U  
PTB 01 ATEX 1129 U

### IECEX

IECEX PTB 06.0011 U  
IECEX PTB 06.0016 U  
IECEX PTB 06.0014 U

Series 8082/8010 Illuminated Pushbuttons have contact blocks and LED pilot lights combined under one actuator. The possible contact blocks are either 2 N.C., or 2 N.O., or 1 N.O. and 1 N.C. By wiring the individual components appropriately, different switching and indicating functions can be achieved.

The lamps may be operated at any voltage between 12V and 254 V AC/DC. They are available in red, green, amber, white and blue.



8008 CONTROL SWITCHES



**APPROVALS**

- FILE No. E182378
- CERTIFIED - FILE No. LR99480
- PTB 00 ATEX 1111U
- IECEX  
IECEX PTB 06.0010 U

The 8008 Series is a two pole and a four pole control switch which is rail mountable via a supplied adapter plate. Control switch bodies are made from polyester and designed to contain the pressure generated by an internal explosion. The switches are available in over 300 different contact configurations. The most common 2-pole switching arrangements are illustrated on this page. The 4 pole switching arrangements are illustrated on page F12. For more configurations, consult factory.




Insert Actuator Code  
 L-Large Lockable  
 S-Small Lockable  
 N-Small Lockable  
 Non-Locking

**Ordering Information**

Selector switch specification example: 8008/2-038  
**How to read the diagram:**

First we note that there are three positions to which the handle can be turned: 45° left position, 90° center position and 135° right position.



The first contact, designated by terminal numbers 13-14 is open when the handle is in the left position (45°) [blank square], it is also open in the center position (90°) [blank square], and is closed in the right position (135°) [square marked with an X].


The second contact, designated by terminal numbers 23-24 is open in the left position (45°) [blank square] and is closed in the center position (90°) [square marked with an X]. At the right position (135°) the contact remains closed [square marked with an X].

The terminal numbers are marked on the switch block.

See chart below for a selection of available contact configurations. For other contact configurations, consult factory.

**Technical Data for 2 and 4 Pole**

	NEC/CEC	IEC
Rated Voltage	600V	690VAC
Rated Current	10A	16A
Mechanical Life	≥ 10 <sup>5</sup> Operations	
Electrical Life	≥ 10 <sup>5</sup> Operations	
Terminals	12AWG	2.5mm <sup>2</sup>

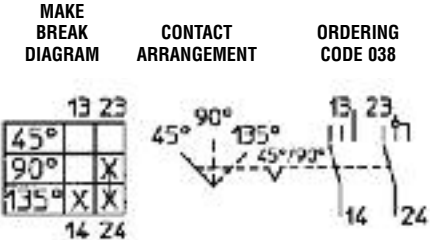

Note: The above denoted 45°/90° at the notch indicates that in these two positions the switch is maintained, and the unmentioned 135° position is spring return to the 90° center position. The contacts are drawn in the 45° position. This is indicated by the solid 45° line.

**Ordering Information, 2 Pole Switches**

MAKE BREAK DIAGRAMS	CONTACT ARRANGEMENTS	INDIVIDUAL ORDER CATALOG NUMBER	ASSEMBLY CODE
		8008/2-002	p 02
		8008/2-005	p 05
		8008/2-016	p 16
		8008/2-027	p 27
		8008/2-034	p 34
		8008/2-038	p 38
		8008/2-040	p 40
		8008/2-051	p 51

(See Switch handle ordering table on next page).



## 8008 CONTROL SWITCHES, 4-POLE

### Ordering Information, 4 Pole Switches

MAKE BREAK DIAGRAM	CONTACT ARRANGEMENT	INDIVIDUAL ORDER CATALOG NUMBER	ASSEMBLY CODE
		8008/2-102	p102
		8008/2-106	p106
		8008/2-109	p109
		8008/2-110	p110
		8008/2-113	p113
		8008/2-119	p119
		8008/2-127	p127
		8008/2-139	p139
		8008/2-148	p148



### APPROVALS



FILE E182378



CERTIFIED - FILE LR99480



PTB 00 ATEX 1111U

IECEX

IECEX PTB 06.0010 U

The most common 4-pole switching arrangements are illustrated on this page. For more configurations, consult factory.

Since the 4 pole switches are deeper than the 2 pole, they only can be mounted into deep enclosures with the assembly codes 73, 84 and 94.



### Control Switch Handles

DESCRIPTION	TYPE	INDIVIDUAL ORDER CATALOG NUMBER	ASSEMBLY CODE
Small Rotary Actuator	not lockable	8602A0732-1	N
	lockable, one position	8602A4-0734	S
Large Rotary Actuator*	lockable	8602A1-SS-0731	L

Insert Actuator Code

L - Large Lockable  
S - Small Lockable  
N - Small Non-Locking

\* Can only be installed in enclosure codes 12, 73, 54 and 94 (See page F14 for legend plate ordering information.)





## 8405 AMMETERS

### Ordering Information

TYPE	MEASURING RANGE	INDIVIDUAL ORDER CATALOG NUMBER	ASSEMBLY CODE
DIRECT READ (2X OVERLOAD)	0-20mA or 4-20mA	8405/2-0.02/0.04	AD0204
	0-1/2 A	8405/2-1/2	AD0012
	0-4/8 A	8405/2-4/8	AD0048
	0-10/20 A	8405/2-10/20	AD1020
	0-15/30 A	8405/2-15/30	AD1530
INDIRECT READ (for current transformer)	1A Secondary/ 2 and 5X Overload	8405/2-1	A1 - - - -
	5A Secondary/ 2 and 5X Overload	8405/2-5	A5 - - - -
	SCALE CODES		
	1/5 2/10 5/25 10/50 15/75	20/100 30/150 40/200 50/250 75/375	100/500 150/750 200/1000 250/1250 300/1500
BEZEL	2.5" x 2.5" (64 x 64mm)	86 038 01 58 7	Included in ordering code above

#### APPROVALS

- FILE No. E182378
- CERTIFIED - FILE LR99480
- PTB 01 ATEX 2158 U
- IECEX  
IECEX PTB 06.0017 U

The 8405 Series ammeters are used to measure current of a motor supply circuit in a potentially explosive atmosphere.

They are available in both direct and indirect reading versions (current transformer not supplied) with slide in scales to accommodate any amperage range required.

A red pointer can be manually adjusted for quick visual comparison of the actual value with the set value.

The supplied adapter plate allows the unit to be rail mounted for snap-on-installation.

### Technical Data

	NEC/CEC	IEC
Rated Insulated Voltage:	600V	690V
Movement:	Iron Core	
Power Consumption:	0.2W Max.	
Frequency	15-100 Hz. DC available	
Accuracy	2.5% of full range	
Terminals	12AWG	2.5mm <sup>2</sup>



#### APPROVALS

- CERTIFIED - FILE LR99480
- PTB 01 ATEX 1066U
- IECEX  
IECEX PTB 06.0032 U

A potentiometer functions as a variable resistor. It is used to adjust resistance in a control circuit to vary motor speed or other applications.

The housing is made from polyester and designed to contain the pressure generated by an internal explosion.

The supplied adapter makes it rail mountable for snap-on-installation.

## 8208 POTENTIOMETERS FOR HAZARDOUS LOCATIONS

### Ordering Information

	INDIVIDUAL ORDER CATALOG NUMBER	ASSEMBLY CODE
<b>Potentiometer</b>	8208/24-08-S002- - -	01 = 100Ω    06 = 4.7 kΩ    11 = 220 kΩ 02 = 220Ω    07 = 10 kΩ    12 = 470 kΩ 03 = 470Ω    08 = 22 kΩ    13 = 1 MΩ 04 = 1 kΩ    09 = 47 kΩ    14 = 2.2 MΩ 05 = 2.2 kΩ    10 = 100 kΩ    15 = 4.7 MΩ
resistance values in ohms		
<b>Actuator</b>		
with dial scale		
0-6	86 028 06 16 7 AA	P6
0-10	86 028 06 16 7 AB	P1
0-100	86 028 06 16 7 AC	P2

### Technical Data

Housing material:	Polyester
Rated Power:	2 Watt
Voltage limit:	450V
Resistance Values:	100 ohms to 4.7 mega ohms
Characteristics:	linear
Resistance tolerance:	±30%
Material of resistor:	carbon
Adjustment scale:	270 degrees
Terminals:	12AWG (2.5mm <sup>2</sup> )



## NAME PLATES AND LEGEND DISCS



### Pushbutton Legend Disks Ordering

DESCRIPTION	CATALOG NUMBER	
Blank, Legend Disk Blue	86 029 34 85 6	
Blank, Legend Disk Yellow	86 029 35 85 6	
Blank, Legend Disk Red	86 029 30 85 6	
Blank, Legend Disk Green	86 029 31 85 6	
Blank, Legend Disk White	86 029 33 85 6	
Blank, Legend Disk Black	86 029 32 85 6	
Red, Legend Disk "STOP"	86 029 03 84 0	
Green, Legend Disc "START"	86 029 09 84 0	
Red, Legend Disk "OFF"	86 029 05 84 0	
Green, Legend Disk "ON"	86 029 06 84 0	
Green, Legend Disk "I"	86 029 07 84 0	
Green, Legend Disk "II"	86 029 08 84 0	
Red, Legend Disk "O"	86 029 02 84 0	
Red, Legend Disk Arrow	86 029 01 84 0	
Black, Legend Disk "UP"	86 029 32 85 0	"UP"
Black, Legend Disk "DOWN"	86 029 32 85 0	"DOWN"
Black, Legend Disk "RUN"	86 029 32 85 0	"RUN"
Black, Legend Disk "SLOW"	86 029 32 85 0	"SLOW"
Black, Legend Disk "FAST"	86 029 32 85 0	"FAST"
Black, Legend Disk "CLOSE"	86 029 25 84 0	
Black, Legend Disk "OPEN"	86 029 23 84 0	
Black, Legend Disk "AUTO"	86 029 32 85 0	"AUTO"
Black, Legend Disk "RIGHT"	86 029 32 85 0	"RIGHT"
Black, Legend Disk "LEFT"	86 029 32 85 0	"LEFT"
Black, Legend Disk "HAND"	86 029 32 85 0	"HAND"
Black, Legend Disk "RESET"	86 029 32 85 0	"RESET"
Black, Legend Disk "OFF-ON"	86 029 32 85 0	"OFF-ON"
Black, Legend Disk Arrow	86 029 11 84 0	
Black, Legend Disk Arrow	86 029 12 84 0	

### Legend Plates Ordering


DESCRIPTION			CATALOG NUMBER
One-line Legend Frame			86 029 04 80 0
Inserts:			
POS. 1	POS. 2	POS. 3	
HAND	0	AUTO	86 029 09 85 0
OFF	.	ON	86 029 08 85 0
	0	I	86 029 07 85 0
I		II	86 029 06 85 0
I	0	II	86 029 05 85 0
0	I	II	86 029 04 85 0
0	.	I	86 029 02 85 0
0/OFF		I/ON	86 029 01 85 0
Blank- one line insert			86 029 10 85 0
Two-line Legend Frame			86 029 07 80 0
Blank- two line insert			86 029 24 85 0
Three-line Legend Frame			86 029 20 80 0
Blank- Three-line insert			86 029 40 85 0

### Legend Disks for Large Control Switch Handle\* Ordering

DESCRIPTION	CATALOG NUMBER
Blank	86 029 23 85 6
OFF-ON	86 029 11 85 0
HAND-O-AUTO	86 029 18 85 0

### Label Ordering

DESCRIPTION	CATALOG NUMBER
Station Identification Label	80 400 01 85 0




\* Must be installed prior to handle assembly

### Accessories

Description	Catalog Number	Assembly Code
Device close-up plug	8602801587	P733
Actuator wrench	8030901400	N/A
Momentary PB 01, 02 lockout	8602A0754	LK01
Momentary PB 01, 02 exclusion	8602A0755	LK02
Small mushroom PB 03, 10, 12 & 13 guard	8602A0751	LK03
Small mushroom 03, 10, 12 & 13 lockout (actuated)	8602A0752	LK10
Mushrooms 10, 15 pin & chain lockout	8602A0756	LK11
Small mushroom 03, 10, 12 & 13 exclusion (non actuated)	8602A0758	LK20
Momentary PB 01, 02 exclusion	8602A0753	LK21
Double PB 23 lockout	8602A0757	LK23

### Conduit & Cable Entry Parts Ordering

DESCRIPTION	CATALOG NUMBER
<b>Hub Assemblies for FRP Housings</b>	
Back Plate M20	80 400 07 55 0
Back Plate M25	80 400 08 55 0
Back Plate 1/2"	80 400 10 55 0
Back Plate 3/4"	80 400 09 55 0
3/4" NPT Fixed Hub	82 959 39 37 0
Cable Gland, plastic M25	8161/5-M25-17
Close-up Plug M25	8290/3-M25
Locknut M25	81 610 03 91 0
Breathing Gland, includes locknut M25	81 620 04 02 0
Breathing Gland, 3/4"	8162/9
Reducer, 3/4" - 1/2" NPT	R-21
Coupling Kit M25	80 408 06 29 0



Combination Coupling Kit to gang boxes



88 000 07 54 0 Installed



88 000 07 52 0




Conduit Hub Assembly




Actuator Wrench




*DIMENSIONS*

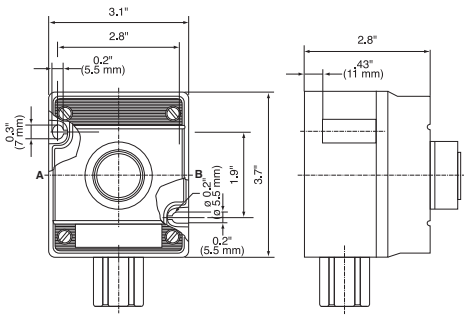


**Compact 8040/11**

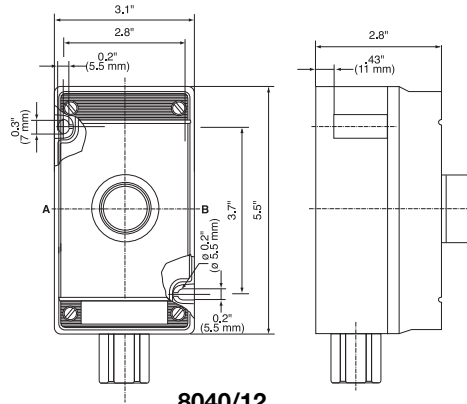


**8040/12**

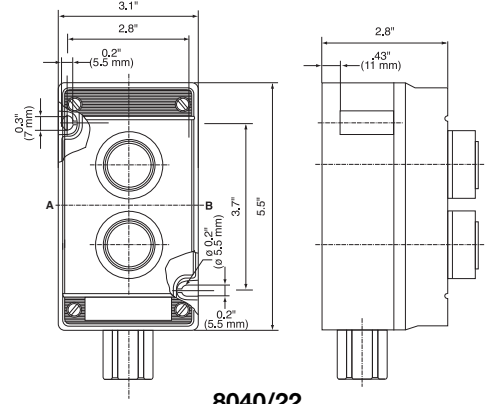


**8040/22**

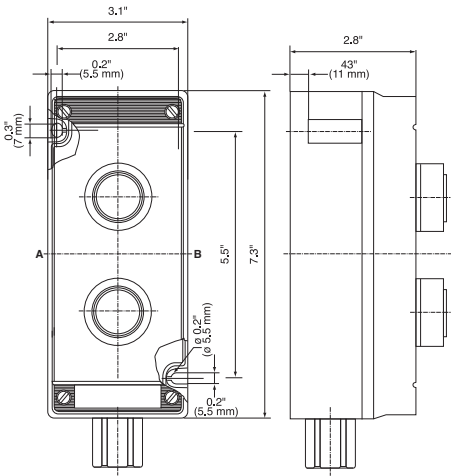


**8040/64**

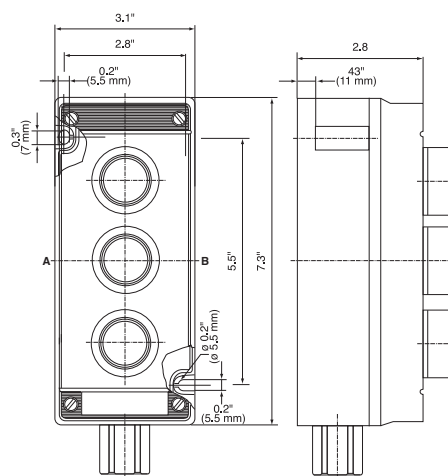


**8040/33**

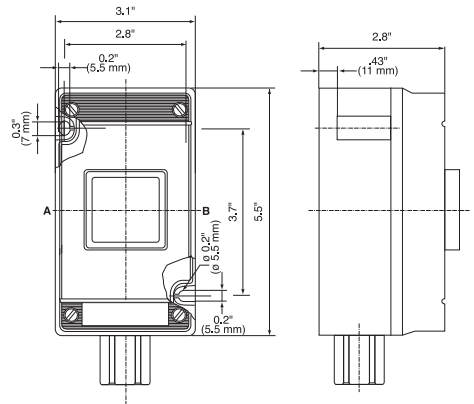


**8040/42**

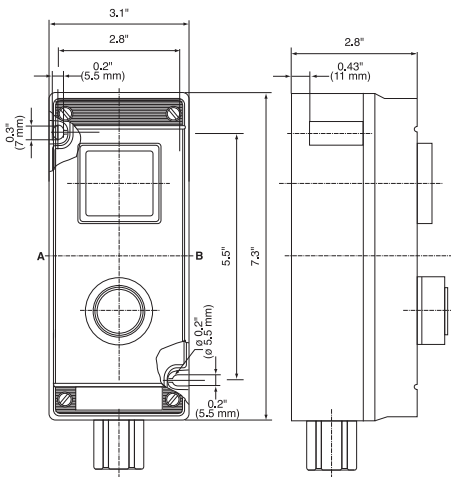

**8040/54**

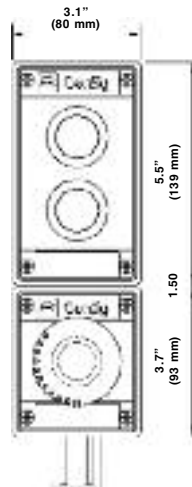

**Any Combination possible with kit 80 408 06 29 0**

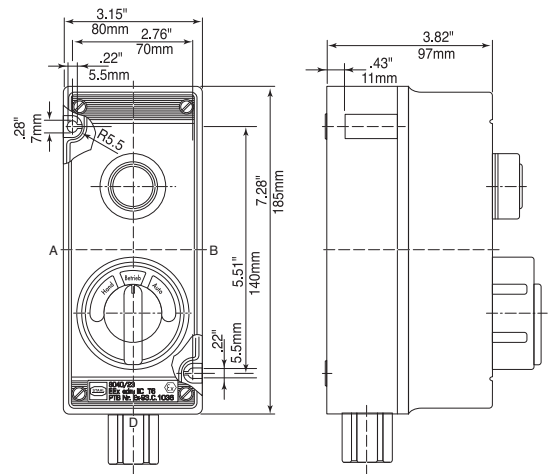

**8040/73,84,94**

# 8150 Series

CONTROL STATION IN STAINLESS STEEL



## CONTROLS

STAHL

### CLASSIFICATIONS

#### NEC & CEC

Class I, Zones 1 & 2 AEx de II C T6  
Class I, Division 2, Groups A,B,C,D  
Class II, Division 2, Groups F,G  
Class III  
Enclosure Type: 3, 4 & 4X; IP66



File No. E 182378



II 2G Ex de IIC T6  
PTB 09 ATEX 1109



II 2D Ex tD A21 IP66, T80°C

#### IECEX

Ex de IIC T6  
Ex tD A21 IP66 T80°C  
IECEX PTB 06.0090

#### Special Ambient Temperature Range:\*

+55°C (+131°F) Max.  
-60°C (-76°F) Min.

\*Consult Factory

#### Features:

8150 series control stations are designed to incorporate control and display devices. The number of units installed depends on the control station size and the space required to fit each device.

- Enclosures in 316 or 304 stainless steel
  - 6 basic enclosure sizes
  - Options:
    - Flanges
    - Cover Hinges
  - Enclosures can be coupled together
- For entry hardware see pages C41, C42 & Section J

#### Components:

- Contact blocks
- Pilot lights
- Illuminated buttons
- Control switches
- Ammeters
- Voltmeters

For component data  
see pages F7-F14 and F37-F39

IN CARBON STEEL OR STAINLESS STEEL



**8082**  
Control Unit with actuators  
7/16" /o.d. 38mm



**8010**  
LED Pilot Light



**8082/8010**  
Illuminated Pushbutton
















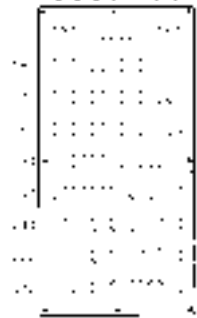
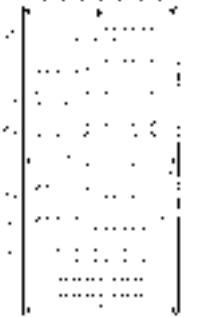
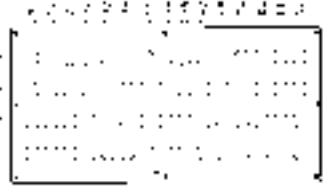
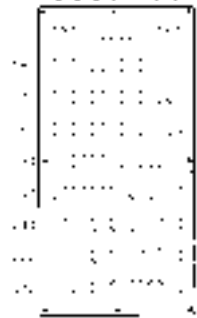
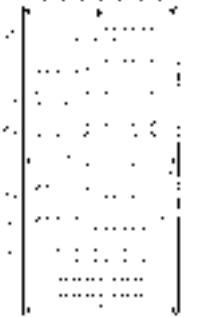
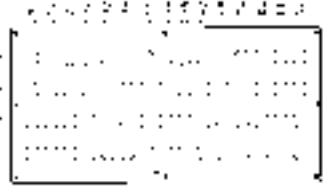
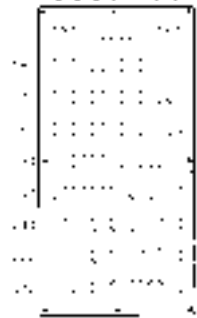
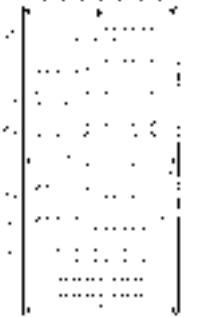
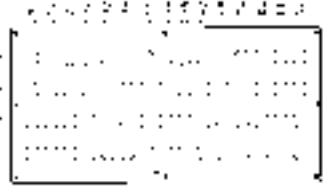
## Typical Panel Configurations

ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER																									
		<p>Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, and Illuminated Pushbuttons 8082/8010.</p>																										
<p><b>4</b></p> <table border="0"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>6.95"</td> <td>4.58"</td> <td>3.58"</td> </tr> <tr> <td>176 mm</td> <td>116 mm</td> <td>91 mm</td> </tr> </table> <p>Side facing down</p>	a	b	c	6.95"	4.58"	3.58"	176 mm	116 mm	91 mm		<p>Fig. 4.1</p> <p>A</p>	<table border="0"> <tr> <td>1.4301 (AISI 304)</td> <td><b>8150/5-0176-0116-091-2311</b></td> </tr> <tr> <td>1.4404 (AISI 316L)</td> <td><b>8150/5-0176-0116-091-3311</b></td> </tr> </table>	1.4301 (AISI 304)	<b>8150/5-0176-0116-091-2311</b>	1.4404 (AISI 316L)	<b>8150/5-0176-0116-091-3311</b>												
a	b	c																										
6.95"	4.58"	3.58"																										
176 mm	116 mm	91 mm																										
1.4301 (AISI 304)	<b>8150/5-0176-0116-091-2311</b>																											
1.4404 (AISI 316L)	<b>8150/5-0176-0116-091-3311</b>																											
<p><b>5</b></p> <table border="0"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>6.95"</td> <td>6.95"</td> <td>3.58"</td> </tr> <tr> <td>176 mm</td> <td>176 mm</td> <td>91 mm</td> </tr> </table> <p>Side facing down</p>	a	b	c	6.95"	6.95"	3.58"	176 mm	176 mm	91 mm		<table border="0"> <tr> <td>Fig. 5.1</td> <td>Fig. 5.2</td> <td>Fig. 5.3</td> <td>Fig. 5.4</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>A</td> <td>A</td> <td>D</td> <td>D</td> </tr> </table>	Fig. 5.1	Fig. 5.2	Fig. 5.3	Fig. 5.4					A	A	D	D	<table border="0"> <tr> <td>1.4301 (AISI 304)</td> <td><b>8150/5-0176-0176-091-2311</b></td> </tr> <tr> <td>1.4404 (AISI 316L)</td> <td><b>8150/5-0176-0176-091-3311</b></td> </tr> </table>	1.4301 (AISI 304)	<b>8150/5-0176-0176-091-2311</b>	1.4404 (AISI 316L)	<b>8150/5-0176-0176-091-3311</b>
a	b	c																										
6.95"	6.95"	3.58"																										
176 mm	176 mm	91 mm																										
Fig. 5.1	Fig. 5.2	Fig. 5.3	Fig. 5.4																									
A	A	D	D																									
1.4301 (AISI 304)	<b>8150/5-0176-0176-091-2311</b>																											
1.4404 (AISI 316L)	<b>8150/5-0176-0176-091-3311</b>																											
<p><b>6</b></p> <table border="0"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>9.29"</td> <td>6.95"</td> <td>3.58"</td> </tr> <tr> <td>236 mm</td> <td>176 mm</td> <td>91 mm</td> </tr> </table> <p>Side facing down</p>	a	b	c	9.29"	6.95"	3.58"	236 mm	176 mm	91 mm		<table border="0"> <tr> <td>Fig. 6.1</td> <td>Fig. 6.2</td> <td>Fig. 6.3</td> <td>Fig. 6.4</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>A</td> <td>A</td> <td>D</td> <td>D</td> </tr> </table>	Fig. 6.1	Fig. 6.2	Fig. 6.3	Fig. 6.4					A	A	D	D	<table border="0"> <tr> <td>1.4301 (AISI 304)</td> <td><b>8150/5-0236-0176-091-2311</b></td> </tr> <tr> <td>1.4404 (AISI 316L)</td> <td><b>8150/5-0236-0176-091-3311</b></td> </tr> </table>	1.4301 (AISI 304)	<b>8150/5-0236-0176-091-2311</b>	1.4404 (AISI 316L)	<b>8150/5-0236-0176-091-3311</b>
a	b	c																										
9.29"	6.95"	3.58"																										
236 mm	176 mm	91 mm																										
Fig. 6.1	Fig. 6.2	Fig. 6.3	Fig. 6.4																									
A	A	D	D																									
1.4301 (AISI 304)	<b>8150/5-0236-0176-091-2311</b>																											
1.4404 (AISI 316L)	<b>8150/5-0236-0176-091-3311</b>																											
<p><b>7</b></p> <table border="0"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>14.17"</td> <td>6.95"</td> <td>3.58"</td> </tr> <tr> <td>360 mm</td> <td>176 mm</td> <td>91mm</td> </tr> </table> <p>Side facing down</p>	a	b	c	14.17"	6.95"	3.58"	360 mm	176 mm	91mm		<table border="0"> <tr> <td>Fig. 7.1</td> <td>Fig. 7.2</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td>D</td> <td>D</td> </tr> </table>	Fig. 7.1	Fig. 7.2			D	D	<table border="0"> <tr> <td>1.4301 (AISI 304)</td> <td><b>8150/5-0360-0176-091-2311</b></td> </tr> <tr> <td>1.4404 (AISI 316L)</td> <td><b>8150/5-0360-0176-091-3311</b></td> </tr> </table>	1.4301 (AISI 304)	<b>8150/5-0360-0176-091-2311</b>	1.4404 (AISI 316L)	<b>8150/5-0360-0176-091-3311</b>						
a	b	c																										
14.17"	6.95"	3.58"																										
360 mm	176 mm	91mm																										
Fig. 7.1	Fig. 7.2																											
D	D																											
1.4301 (AISI 304)	<b>8150/5-0360-0176-091-2311</b>																											
1.4404 (AISI 316L)	<b>8150/5-0360-0176-091-3311</b>																											

For dimensional information see page F21

IN CARBON STEEL OR STAINLESS STEEL
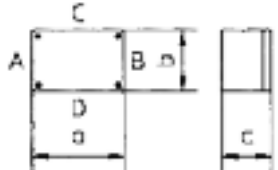
### Typical Panel Configurations

ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER																							
		Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, and Illuminated Pushbuttons 8082/8010.																								
<b>7</b>	<table border="0"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>14.17"</td> <td>6.95"</td> <td>3.58"</td> </tr> <tr> <td>360 mm</td> <td>176 mm</td> <td>91mm</td> </tr> </table>	a	b	c	14.17"	6.95"	3.58"	360 mm	176 mm	91mm	<table border="0"> <tr> <td>Fig. 7.3 </td> <td>Fig. 7.4 </td> </tr> <tr> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> </tr> </table>	Fig. 7.3 	Fig. 7.4 	A	A	<table border="0"> <tr> <td>1.4301 (AISI 304)</td> <td><b>8150/5-0360-0176-091-2311</b></td> </tr> <tr> <td>1.4404 (AISI 316L)</td> <td><b>8150/5-0360-0176-091-3311</b></td> </tr> </table>	1.4301 (AISI 304)	<b>8150/5-0360-0176-091-2311</b>	1.4404 (AISI 316L)	<b>8150/5-0360-0176-091-3311</b>						
a	b	c																								
14.17"	6.95"	3.58"																								
360 mm	176 mm	91mm																								
Fig. 7.3 	Fig. 7.4 																									
A	A																									
1.4301 (AISI 304)	<b>8150/5-0360-0176-091-2311</b>																									
1.4404 (AISI 316L)	<b>8150/5-0360-0176-091-3311</b>																									
Side facing down																										
<b>8</b>	<table border="0"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>14.17"</td> <td>14.17"</td> <td>3.58"</td> </tr> <tr> <td>360 mm</td> <td>360 mm</td> <td>91mm</td> </tr> </table>	a	b	c	14.17"	14.17"	3.58"	360 mm	360 mm	91mm	<table border="0"> <tr> <td>Fig. 8.1 </td> <td>Fig. 8.2 </td> </tr> <tr> <td style="text-align: center;">D</td> <td style="text-align: center;">D</td> </tr> </table>	Fig. 8.1 	Fig. 8.2 	D	D	<table border="0"> <tr> <td>1.4301 (AISI 304)</td> <td><b>8150/5-0360-0360-091-2311</b></td> </tr> <tr> <td>1.4404 (AISI 316L)</td> <td><b>8150/5-0360-0360-091-3311</b></td> </tr> </table>	1.4301 (AISI 304)	<b>8150/5-0360-0360-091-2311</b>	1.4404 (AISI 316L)	<b>8150/5-0360-0360-091-3311</b>						
a	b	c																								
14.17"	14.17"	3.58"																								
360 mm	360 mm	91mm																								
Fig. 8.1 	Fig. 8.2 																									
D	D																									
1.4301 (AISI 304)	<b>8150/5-0360-0360-091-2311</b>																									
1.4404 (AISI 316L)	<b>8150/5-0360-0360-091-3311</b>																									
Side facing down																										
<b>9</b>	<table border="0"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>28.62"</td> <td>14.17"</td> <td>3.58"</td> </tr> <tr> <td>727 mm</td> <td>360 mm</td> <td>91mm</td> </tr> </table>	a	b	c	28.62"	14.17"	3.58"	727 mm	360 mm	91mm	<table border="0"> <tr> <td>Fig. 9.1 </td> <td>Fig. 9.2 </td> </tr> <tr> <td style="text-align: center;">A</td> <td style="text-align: center;">A</td> </tr> <tr> <td>Fig. 9.3 </td> <td style="text-align: center;">D</td> </tr> </table>	Fig. 9.1 	Fig. 9.2 	A	A	Fig. 9.3 	D	<table border="0"> <tr> <td>1.4301 (AISI 304)</td> <td><b>8150/5-0727-0360-091-2311</b></td> </tr> <tr> <td>1.4404 (AISI 316L)</td> <td><b>8150/5-0727-0360-091-3311</b></td> </tr> <tr> <td>1.4301 (AISI 304)</td> <td><b>8150/5-0727-0360-091-2311</b></td> </tr> <tr> <td>1.4404 (AISI 316L)</td> <td><b>8150/5-0727-0360-091-3311</b></td> </tr> </table>	1.4301 (AISI 304)	<b>8150/5-0727-0360-091-2311</b>	1.4404 (AISI 316L)	<b>8150/5-0727-0360-091-3311</b>	1.4301 (AISI 304)	<b>8150/5-0727-0360-091-2311</b>	1.4404 (AISI 316L)	<b>8150/5-0727-0360-091-3311</b>
a	b	c																								
28.62"	14.17"	3.58"																								
727 mm	360 mm	91mm																								
Fig. 9.1 	Fig. 9.2 																									
A	A																									
Fig. 9.3 	D																									
1.4301 (AISI 304)	<b>8150/5-0727-0360-091-2311</b>																									
1.4404 (AISI 316L)	<b>8150/5-0727-0360-091-3311</b>																									
1.4301 (AISI 304)	<b>8150/5-0727-0360-091-2311</b>																									
1.4404 (AISI 316L)	<b>8150/5-0727-0360-091-3311</b>																									
Side facing down																										
Side facing down																										

For dimensional information see page F21

IN CARBON STEEL OR STAINLESS STEEL



**8082**  
Contact Blocks with Double Momentary Pushbutton

Emergency STOP (Jumbo)

**8008**  
Control Switches

**8405**  
Ammeter








## Typical Panel Configurations

ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER
		Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, Illuminated Pushbuttons 8082/8010, Control Switches 8008 and Ammeters 8405.	
<b>4</b> a 6.95" 176 mm  Side facing down	b 4.58" 116 mm	c 3.58" 91 mm  Fig. 4.4  A Fig. 4.5  A Fig. 4.6  D Fig. 4.7  D	1.4301 <b>8150/5-0176-</b> (AISI 304) <b>0116-091-2311</b>  1.4404 <b>8150/5-0176-</b> (AISI 316L) <b>0116-091-3311</b>
<b>5</b> a 6.95" 176 mm  Side facing down	b 6.95" 176 mm	c 3.58" 91mm  Fig. 5.5  D Fig. 5.6  D	1.4301 <b>8150/5-0176-</b> (AISI 304) <b>0176-091-2311</b>  1.4404 <b>8150/5-0176-</b> (AISI 316L) <b>0176-091-3311</b>
<b>6</b> a 9.29" 236 mm  Side facing down	b 6.95" 176 mm	c 3.58" 91 mm  Fig. 6.5  A Fig. 6.6  A	1.4301 <b>8150/5-0236-</b> (AISI 304) <b>0176-091-2311</b>  1.4404 <b>8150/5-0236-</b> (AISI 316L) <b>0176-091-3311</b>
<b>7</b> a 14.17" 360 mm  Side facing down	b 6.95" 176 mm	c 3.58" 91mm  Fig. 7.5  D	1.4301 <b>8150/5-0360-</b> (AISI 304) <b>0176-091-2311</b>  1.4404 <b>8150/5-0360-</b> (AISI 316L) <b>0176-091-3311</b>

For dimensional information see page F21


IN CARBON STEEL OR STAINLESS STEEL
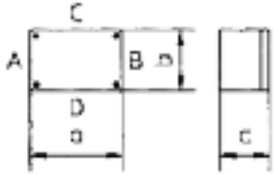
## Typical Panel Configurations

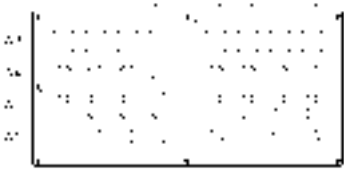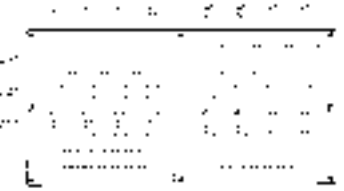ENCLOSURE SIZE	DIMENSIONS Inches mm			PANEL CONFIGURATIONS	CATALOG NUMBER	
				Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, Illuminated Pushbuttons 8082/8010, Control Switches 8008 and Ammeters 8405.		
<b>7</b>	a 14.17" 360 mm	b 6.95" 176 mm	c 3.58" 91 mm	Fig. 7.6  A	Fig. 7.7  A	1.4301 <b>8150/5-0360-</b> (AISI 304) <b>0176-091-2311</b>  1.4404 <b>8150/5-0360-</b> (AISI 316L) <b>0176-091-3311</b>
Side facing down						
<b>8</b>	a 14.17" 360 mm	b 14.17" 360 mm	c 3.58" 91 mm	Fig. 8.4  D	Fig. 8.5  D	1.4301 <b>8150/5-0360-</b> (AISI 304) <b>0360-091-2311</b>  1.4404 <b>8150/5-0360-</b> (AISI 316L) <b>0360-091-3311</b>
Side facing down						
<b>9</b>	a 28.62" 727 mm	b 14.17" 360 mm	c 3.58" 91 mm	Fig. 9.4  D	Fig. 9.5  D	1.4301 <b>8150/5-0727-</b> (AISI 304) <b>0360-091-2311</b>  1.4404 <b>8150/5-0727-</b> (AISI 316L) <b>0360-091-3311</b>  1.4301 <b>8150/5-0727-</b> (AISI 304) <b>0360-091-2311</b>  1.4404 <b>8150/5-0727-</b> (AISI 316L) <b>0360-091-3311</b>
Side facing down						
Side facing down						

For dimensional information see page F21


*DIMENSIONS*

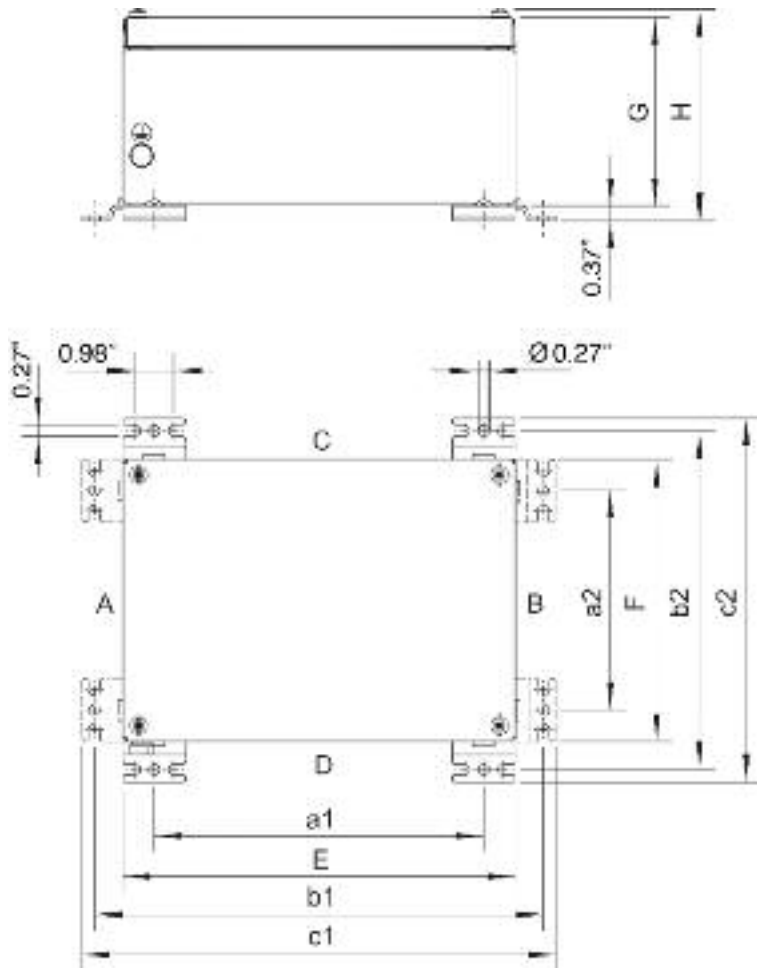

	Width	Height	Depth	Total Depth	Fixing Dimensions					
Type	E	F	G	H	a1	a2	b1	b2	c1	c2
<b>8150/1-0176-0116-091</b>	6.95" (176,5mm)	4.59" (116,5mm)	3.58" (91mm)	4.17" (106mm)	3.01" (76,5mm)	5.35" (136mm)	5.98" (152mm)	8.98" (228mm)	6.61" (228mm)	8.98" (228mm)
<b>8150/1-0176-0176-091</b>	6.95" (176,5mm)	6.95" (176,5mm)	3.58" (91mm)	4.17" (106mm)	5.37" (136,5mm)	5.35" (136mm)	8.35" (212mm)	8.35" (212mm)	8.98" (228mm)	8.98" (228mm)
<b>8150/1-0236-0116-091</b>	9.31" (236,5mm)	6.95" (176,5mm)	3.58" (91mm)	4.17" (106mm)	5.37" (136,5mm)	7.74" (136,5mm)	8.35" (212mm)	10.71" (272mm)	8.98" (228mm)	8.98" (228mm)
<b>8150/1-0360-0176-091</b>	14.17" (360mm)	6.95" (176,5mm)	3.58" (91mm)	4.17" (106mm)	5.37" (136,5mm)	12.6" (320mm)	8.35" (212mm)	15.59" (396mm)	8.98" (228mm)	16.22" (412mm)
<b>8150/1-0360-0360-091</b>	14.17" (360mm)	14.17" (360mm)	3.58" (91mm)	4.17" (106mm)	12.6" (320mm)	12.6" (320mm)	15.59" (396mm)	15.59" (396mm)	16.22" (412mm)	16.22" (412mm)
<b>8150/1-0727-0360-091</b>	28.62" (727mm)	14.17" (360mm)	3.58" (91mm)	4.17" (106mm)	27.05" (687mm)	12.6" (320mm)	30.04" (763mm)	15.59" (396mm)	30.67" (779mm)	16.22" (412mm)

# 8125 Series

CONTROL STATION IN SHEET STEEL OR STAINLESS STEEL

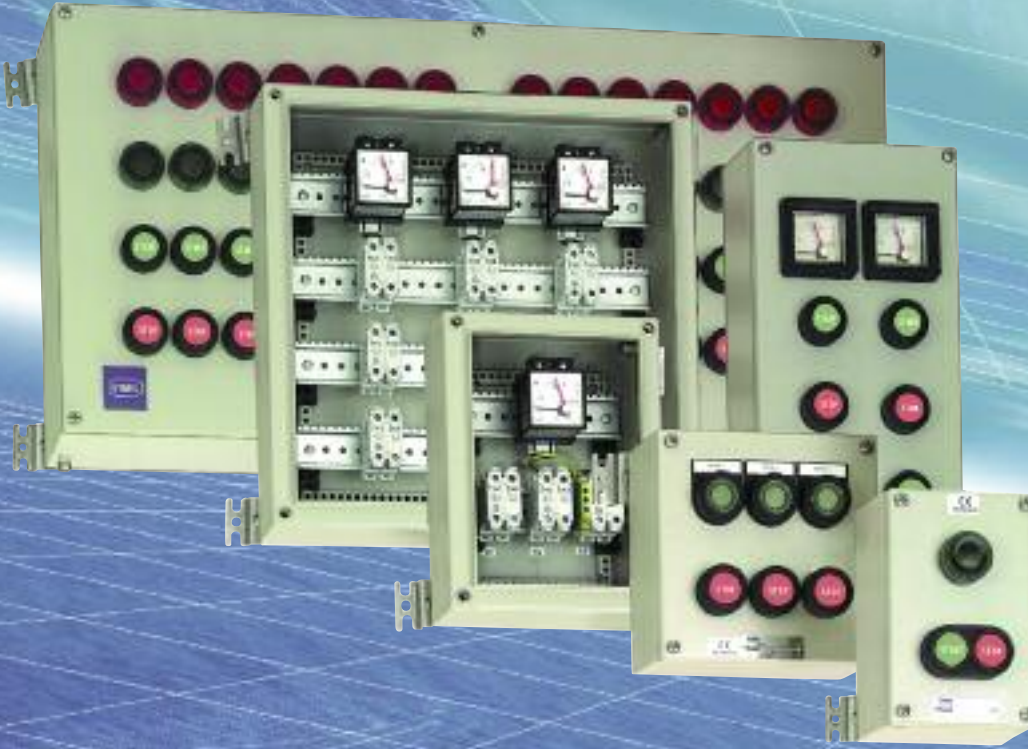

## CONTROLS

STAHL

### CLASSIFICATIONS

NEC- Class I, Zones 1 & 2 AEx de II C T6  
Class I, Division 2, Groups A,B,C,D  
Class II, Division 2, Groups F,G  
Class III

#### Enclosure Type:

stainless steel version  
3, 4 & 4X; IP66,  
carbon steel version, painted  
3 & 4; IP66,



File No. E182378

CEC- Class I, Zones 1 & 2 Ex de II T6  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 1 & 2, Groups E,F,G  
Class III



#### CSA ENCLOSURES

stainless steel version  
3, 4 & 4X; IP66  
carbon steel version, painted  
3 & 4; IP66

File No. LR 99480



II 2G Ex de IIC T6

II 2D Ex tD A21 IP66 T80°C



PTB 01 ATEX 1001

IECEx PTB 09.0049

#### Special Ambient Temperature Range:\*

+55°C (+131°F) Max.

-55°C (-67°F) Min.

\*Consult Factory

#### Features:

8125 series control stations are designed to incorporate control and display devices. The number of units installed depends on the control station size and the space required to fit each device.

- Enclosures in galvanized sheet steel or 316 stainless steel
- 6 basic enclosure sizes
- Options:
  - Flanges
  - Cover Hinges
- Enclosures can be coupled together

For entry hardware see pages C25, C27, C28 & Section J

#### Components:


- Contact blocks
- Pilot lights
- Illuminated buttons
- Control switches
- Ammeters
- Voltmeters

For component data see pages F7-F14 and F37-39.

IN CARBON STEEL OR STAINLESS STEEL



**8082**  
Control Unit with actuators  
7/16" /o.d. 38mm



**8010**  
LED Pilot Light



**8082/8010**  
Illuminated Pushbutton









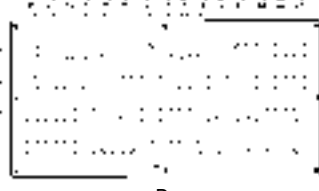
**Typical Panel Configurations**

ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER
		Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, and Illuminated Pushbuttons 8082/8010.	
<b>4</b>	a 6.95" 176 mm  Side facing down	b 4.58" 116 mm	c 3.58" 91 mm
		Fig. 4.1  A	<b>8125/5041-rr</b>
<b>5</b>	a 6.95" 176 mm  Side facing down	b 6.95" 176 mm	c 3.58" 91 mm
		Fig. 5.1 Fig. 5.2 Fig. 5.3 Fig. 5.4  A A D D	<b>8125/5051-rr</b>
<b>6</b>	a 9.29" 236 mm  Side facing down	b 6.95" 176 mm	c 3.58" 91 mm
		Fig. 6.1 Fig. 6.2 Fig. 6.3 Fig. 6.4  A A D D	<b>8125/5061-rr</b>
<b>7</b>	a 14.17" 360 mm  Side facing down	b 6.95" 176 mm	c 3.58" 91mm
		Fig. 7.1 Fig. 7.2  D D	<b>8125/5071-rr</b>
		Enclosure material: sheet steel, painted stainless steel	1 2
<b>Add to catalog number:</b>	Specify side facing down A or D (see above)		

For dimensional information see page F28

IN CARBON STEEL OR STAINLESS STEEL


## Typical Panel Configurations

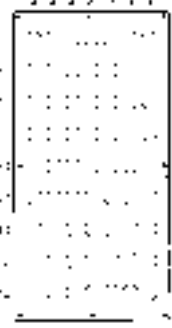ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER
		Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, and Illuminated Pushbuttons 8082/8010.	
<b>7</b>	a 14.17" 360 mm  b 6.95" 176 mm  c 3.58" 91mm	Fig. 7.3  Fig. 7.4 	<b>8125/5071-rr</b>
	Side facing down		
<b>8</b>	a 14.17" 360 mm  b 14.17" 360 mm  c 3.58" 91mm	Fig. 8.1  Fig. 8.2 	<b>8125/5081-rr</b>
	Side facing down		
<b>9</b>	a 28.62" 727 mm  b 14.17" 360 mm  c 3.58" 91mm	Fig. 9.1  Fig. 9.2   Fig. 9.3 	<b>8125/5091-rr</b>
	Side facing down		
		Enclosure material: sheet steel, painted <input type="checkbox"/> 1 stainless steel <input type="checkbox"/> 2	
<b>Add to catalog number:</b>		Specify side facing down A or D (see above)	

For dimensional information see page F28



IN CARBON STEEL OR STAINLESS STEEL

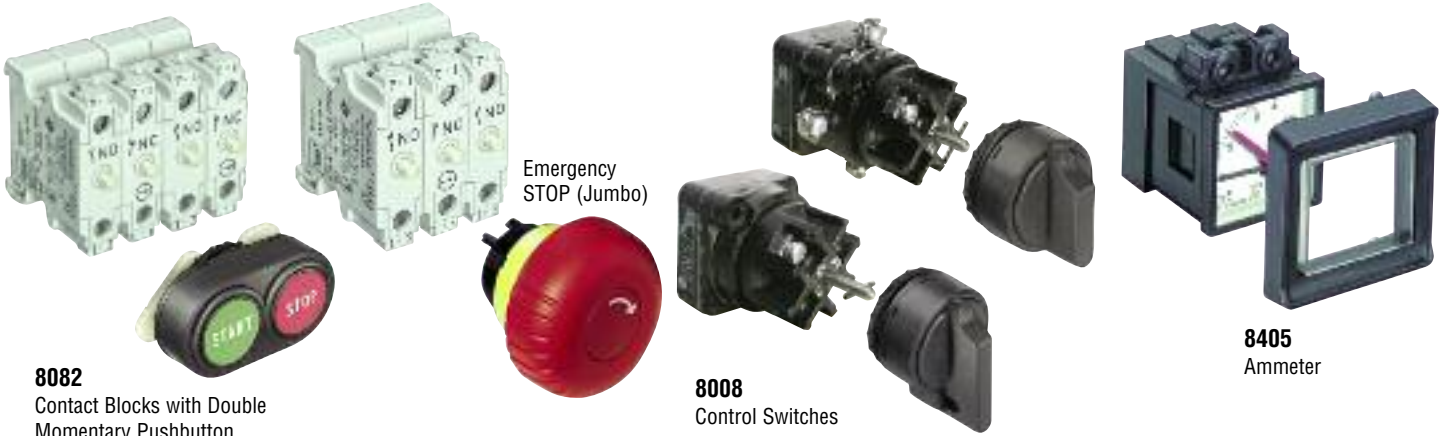

**8082**  
Contact Blocks with Double Momentary Pushbutton

Emergency STOP (Jumbo)

**8008**  
Control Switches

**8405**  
Ammeter







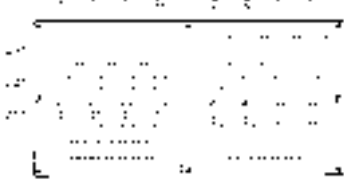
## Typical Panel Configurations

ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER		
		Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, Illuminated Pushbuttons 8082/8010, Control Switches 8008 and Ammeters 8405.			
<b>4</b>	a 6.95" 176 mm  Side facing down	b 4.58" 116 mm	c 3.58" 91 mm	Fig. 4.4 Fig. 4.5 Fig. 4.6 Fig. 4.7  A — A — D — D	<b>8125/5041-rr</b>
<b>5</b>	a 6.95" 176 mm  Side facing down	b 6.95" 176 mm	c 3.58" 91mm	Fig. 5.5 Fig. 5.6  D — D	<b>8125/5051-rr</b>
<b>6</b>	a 9.29" 236 mm  Side facing down	b 6.95" 176 mm	c 3.58" 91 mm	Fig. 6.5 Fig. 6.6  A — A	<b>8125/5061-rr</b>
<b>7</b>	a 14.17" 360 mm  Side facing down	b 6.95" 176 mm	c 3.58" 91mm	Fig. 7.5  D	<b>8125/5071-rr</b>
<b>Add to catalog number:</b>		Enclosure material: sheet steel, painted stainless steel	1 2		
		Specify side facing down A or D (see above)			

For dimensional information see page F28

IN CARBON STEEL OR STAINLESS STEEL
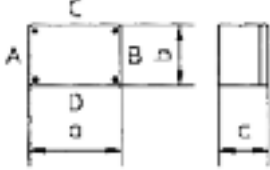
## Typical Panel Configurations

ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER								
		<p>Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, Illuminated Pushbuttons 8082/8010, Control Switches 8008 and Ammeters 8405.</p>									
<p><b>7</b></p> <table border="0"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>14.17"</td> <td>6.95"</td> <td>3.58"</td> </tr> <tr> <td>360 mm</td> <td>176 mm</td> <td>91 mm</td> </tr> </table> <p>Side facing down</p>	a	b	c	14.17"	6.95"	3.58"	360 mm	176 mm	91 mm	<p>Fig. 7.6</p>  <p>Fig. 7.7</p>  <p>A ————— A</p>	<p>8125/5071-rr</p>
a	b	c									
14.17"	6.95"	3.58"									
360 mm	176 mm	91 mm									
<p><b>8</b></p> <table border="0"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>14.17"</td> <td>14.17"</td> <td>3.58"</td> </tr> <tr> <td>360 mm</td> <td>360 mm</td> <td>91 mm</td> </tr> </table> <p>Side facing down</p>	a	b	c	14.17"	14.17"	3.58"	360 mm	360 mm	91 mm	<p>Fig. 8.4</p>  <p>Fig. 8.5</p>  <p>D ————— D</p>	<p>8125/5081-rr</p>
a	b	c									
14.17"	14.17"	3.58"									
360 mm	360 mm	91 mm									
<p><b>9</b></p> <table border="0"> <tr> <td>a</td> <td>b</td> <td>c</td> </tr> <tr> <td>28.62"</td> <td>14.17"</td> <td>3.58"</td> </tr> <tr> <td>727 mm</td> <td>360 mm</td> <td>91 mm</td> </tr> </table> <p>Side facing down</p>	a	b	c	28.62"	14.17"	3.58"	727 mm	360 mm	91 mm	<p>Fig. 9.4</p>  <p>D —————</p> <p>Fig. 9.5</p>  <p>D —————</p>	<p>8125/5091-rr</p>
a	b	c									
28.62"	14.17"	3.58"									
727 mm	360 mm	91 mm									
<p><b>Add to catalog number:</b></p>	<p>Enclosure material:</p> <table border="0"> <tr> <td>sheet steel, painted</td> <td>1</td> </tr> <tr> <td>stainless steel</td> <td>2</td> </tr> </table> <p>Specify side facing down A or D (see above)</p>	sheet steel, painted	1	stainless steel	2						
sheet steel, painted	1										
stainless steel	2										

For dimensional information see page F28




PARTS AND ACCESSORIES




DESIGNATION	ILLUSTRATION	DESCRIPTION	CATALOG NUMBER
<b>Flange Plate Size 1</b>		5" x 2.7" x 0.2" (128 x 68 x 5 mm) carbon steel 316 stainless steel Can be fitted in Enclosures      Sides 8125/*051      A/B/C/D 8125/*061      A/B/C/D 8125/*071      A/B/C/D 8125/*S71      C/D 8125/*081      A/B/C/D	<b>81 250 01 49 0</b> <b>81 259 02 49 0</b>
<b>Flange Plate Size 2</b>		10.5" x 5" x 0.2" (266 x 128 x 5 mm) carbon steel 316 stainless steel Can be fitted in Enclosures      Sides 8125/*063      C/D 8125/*073      C/D 8125/*083 /*085      A/B/C/D 8125/*093 /*095      A/B/C	<b>81 250 02 49 0</b> <b>81 259 04 49 0</b>
<b>Flange Plate Size 3</b>		5" x 5" x 0.2" (126 x 126 x 5 mm) carbon steel 316 stainless steel Can be fitted in Enclosures      Sides 8125/*073      A/B	<b>81 250 03 49 0</b> <b>81 259 06 49 0</b>
<b>Flange Plate Size 4</b>		13.86" x 6.1" x 0.2" (352 x 155 x 5 mm) carbon steel 316 stainless steel Can be fitted in Enclosures      Sides 8125/*085      A/B/C/D 8125/*095      A/B/C/D	<b>81 250 04 49 0</b> <b>81 259 08 49 0</b>
<b>Coupling Frames</b>		Frame Sizes 0    2.68" x 2.68" (68 mm x 68 mm) 1    5.04" x 2.68" (128 mm x 68 mm) 2    10.47" x 4.96" (266 mm x 126 mm) 3    4.96" x 4.96" (126 mm x 126 mm) 4    13.86" x 6.1" (352 mm x 155 mm)	<b>81 460 03 10 0</b> <b>81 460 01 10 0</b> <b>81 460 04 10 0</b> <b>81 460 11 10 0</b> <b>81 250 04 10 0</b>
<b>Cover Hinges</b>		8125 for retrofitting to enclosure  Kit consists of: 2 hinges 3 hinges	<b>81 258 02 29 0</b> <b>81 258 03 29 0</b>
<b>Entry Hubs</b>			<b>8166/11 mounted</b> (see page C15 and C18)  <b>8166/11 part only</b> (see page J1)

For Entry information see pages C16, 18 & 19.


## DIMENSIONS

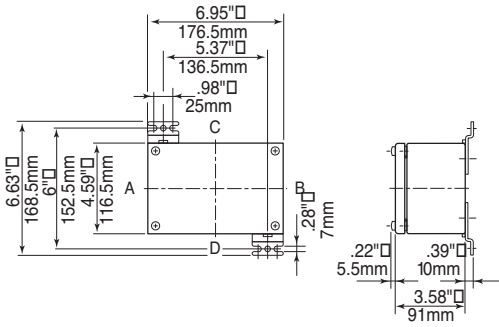


8125/5041

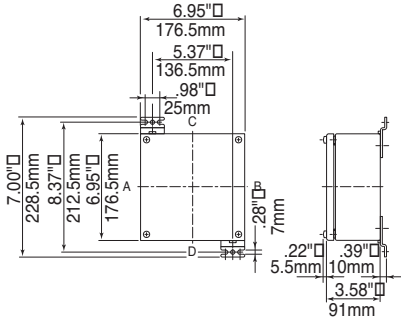


8125/5051

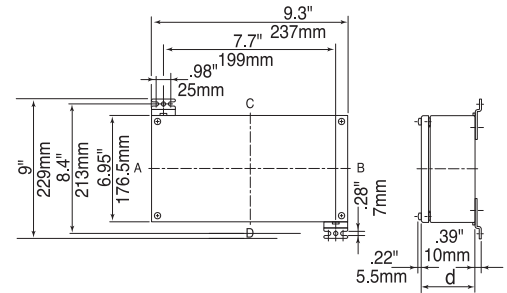


8125/506•

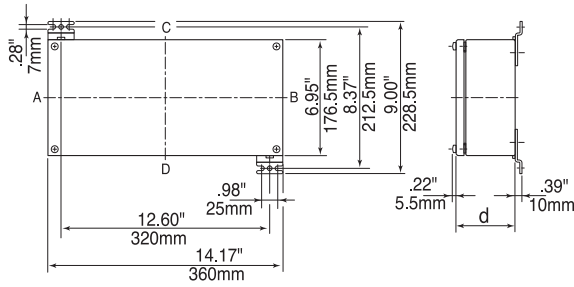

8125/507•

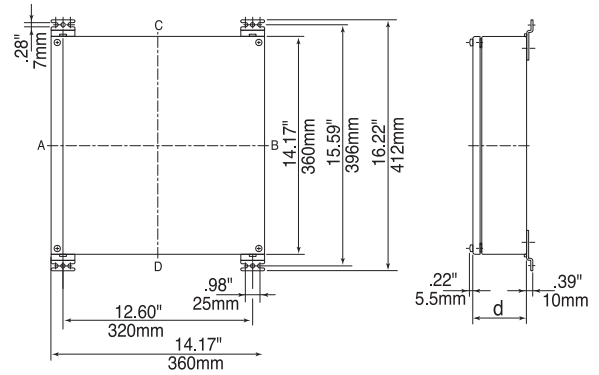


8125/508•

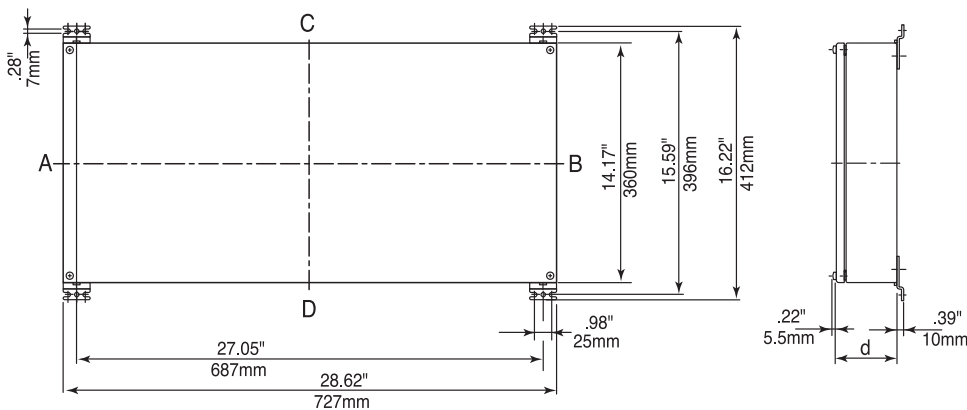

8125/509•

Available Enclosure Depth (d)				
Enclosure Sizes	1 3.58" 91mm	3 5.91" 150mm	5 7.48" 190mm	6 9.06" 230mm
8125/504•	x	-	-	-
8125/505•	x	-	-	-
8125/506•	x	x	-	-
8125/507•	x	x	-	-
8125/508•	x	x	x	x
8125/509•	x	x	x	-

Flange option:  
Add to overall  
dimensions.





# 8146 Series

CONTROL STATION IN POLYESTER RESIN



## CONTROLS

STAHL

### CLASSIFICATIONS

NEC- Class I, Zones 1 & 2 AEx de IIC T6  
Class I, Division 2, Groups A,B,C,D  
Class II, Division 2, Groups F,G  
Class III

Enclosure Type 3, 4 & 4X; IP66  
FILE No. E182378

CEC- Class I, Zones 1 & 2 Ex de IIC T6  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 1 & 2, Groups E,F,G  
Class III

CSA ENCLOSURES 3, 4 & 4X; IP66  
CERTIFIED - FILE No. LR99480

II 2G Ex de IIC T6  
PTB 01 ATEX 1024

II 2D Ex tD A21 IP66, T80°C

### IECEX

Ex de IIC T6  
Ex tD A21 IP66 T80°C  
IECEX PTB 06.0079

Ambient Temperature Range  
+40°C (+104°F) Max.  
-20°C (-4°F) Min.

Special Temperature Range\*  
+55°C (+131°F) Max.  
-40°C (-40°F) Min.  
\*Consult Factory

### Features:

Control and display devices are assembled in a clear layout in 8146 series control stations. The number of installed components depends on the control station size and the space required to fit each device.

- Enclosures in fiberglass reinforced polyester (FRP)
- 7 basic enclosure sizes
- Different enclosure depths
- Options:
  - Flanges
  - Cover Hinges
  - Flanged enclosure
  - Brass plates for metal cable entriesFor entry hardware see pages C37, C39 and C40
- Can be combined to larger units

### Components:

- Contact blocks
- Pilot lights
- Illuminated buttons
- Control switches
- Ammeters
- Voltsmeters

For component data  
see pages F7-F14 and F37-39.

IN FIBERGLASS REINFORCED POLYESTER (FRP)



**8082**  
Control Block with actuators  
7/16"/o.d. 38mm



**8010**  
LED Pilot Light



**8082/8010**  
Illuminated Pushbutton

## Typical Panel Configurations

ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER
		Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, and Illuminated Pushbuttons 8082/8010.	
<b>3</b>	a 4.43" 112 mm  Side facing down	b 4.43" 112 mm	c 3.58" 91mm
		Fig. 3.1  A	<b>8146/5031-3<sub>r</sub></b>
<b>4</b>	a 6.69" 170 mm  Side facing down	b 4.43" 112 mm	c 3.58" 91mm
		Fig. 4.1 Fig.4.2 Fig. 4.3  A A D	<b>8146/5041-3<sub>r</sub></b>
<b>5</b>	a 6.69" 170 mm  Side facing down	b 6.69" 170 mm	c 3.58" 91mm
		Fig. 5.1 Fig.5.2 Fig. 5.3 Fig. 5.4  A A D D	<b>8146/5051-3<sub>r</sub></b>
<b>6</b>	a 8.94" 227 mm  Side facing down	b 6.69" 170 mm	c 3.58" 91mm
		Fig. 6.1 Fig.6.2 Fig. 6.3 Fig. 6.4  A A D D	<b>8146/5061-3<sub>r</sub></b>
<b>Add to catalog number:</b>		Specify side facing down A or D (see above)	

For dimensional information see page F36

IN FIBERGLASS REINFORCED POLYESTER (FRP)

## Typical Panel Configurations

ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER
		Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, and Illuminated Pushbuttons 8082/8010.	
<b>7</b>	a 13.41" 340 mm  b 6.69" 170 mm  c 3.58" 91 mm	Fig. 7.1  D  Fig. 7.2  D  Fig. 7.3  A  Fig. 7.4  A	<b>8146/5071-3</b>
<b>8</b>	a 13.41" 340 mm  b 13.41" 340 mm  c 3.58" 91 mm	Fig. 8.1  D  Fig. 8.2  D	<b>8146/5081-3</b>
<b>9</b>	a 26.83" 680 mm  b 13.41" 340 mm  c 3.58" 91 mm	Fig. 9.1  A  Fig. 9.2  A  Fig. 9.3  D	<b>8146/5091-3</b>
<b>Add to catalog number:</b>		Specify side facing down A or D (see above)	

For dimensional information see page F36

IN FIBERGLASS REINFORCED POLYESTER (FRP)



**8082**  
Contact Blocks with Double Momentary Pushbutton

Emergency STOP (Jumbo)

**8008**  
Control Switches

**8405**  
Ammeter








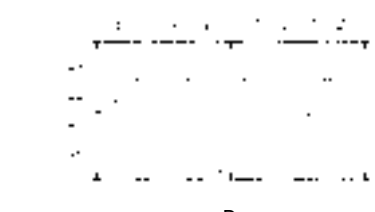
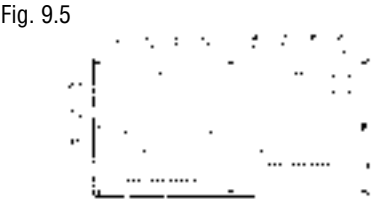

**Typical Panel Configurations**

ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER
		Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, Illuminated Pushbuttons 8082/8010, Control Switches 8008 and Ammeters 8405.	
<b>3</b> a 4.43" 112 mm  Side facing down	b 4.43" 112 mm  c 3.58" 91 mm	Fig. 3.2    Fig. 3.3    Fig. 3.4  A    A    A	<b>8146/5031-3<sub>r</sub></b>
<b>4</b> a 6.69" 170 mm  Side facing down	b 4.43" 112 mm  c 3.58" 91 mm	Fig. 4.4    Fig. 4.5    Fig. 4.6    Fig. 4.7  A    A    D    D	<b>8146/5041-3<sub>r</sub></b>
<b>5</b> a 6.69" 170 mm  Side facing down	b 6.69" 170 mm  c 3.58" 91 mm	Fig. 5.5    Fig. 5.6  D    D	<b>8146/5051-3<sub>r</sub></b>
<b>6</b> a 8.94" 227 mm  Side facing down	b 6.69" 170 mm  c 3.58" 91 mm	Fig. 6.5    Fig. 6.6  A    A	<b>8146/5061-3<sub>r</sub></b>
<b>Add to catalog number:</b>		Specify side facing down A or D (see above)	

For dimensional information see page F36


IN FIBERGLASS REINFORCED POLYESTER (FRP)






## Typical Panel Configurations

ENCLOSURE SIZE	DIMENSIONS Inches mm	PANEL CONFIGURATIONS	CATALOG NUMBER
		Panel configurations Maximum quantity of components such as; Contact Blocks 8082, Pilot Lights 8010, Illuminated Pushbuttons 8082/8010, Control Switches 8008 and Ammeters 8405.	
<b>7</b>	a 13.41" 340 mm  Side facing down  Side facing down	b 6.69" 170 mm  Side facing down  Side facing down	c 3.58" 91 mm  Side facing down  Side facing down
		Fig. 7.5  D Fig. 7.6  A Fig. 7.7  A	<b>8146/5071-3<sub>r</sub></b> 
<b>8</b>	a 13.41" 340 mm  Side facing down	b 13.41" 340 mm  Side facing down	c 3.58" 91 mm  Side facing down
		Fig. 8.4  D Fig. 8.5  D	<b>8146/5081-3<sub>r</sub></b> 
<b>9</b>	a 26.83" 680 mm  Side facing down  Side facing down	b 13.41" 340 mm  Side facing down  Side facing down	c 3.58" 91 mm  Side facing down  Side facing down
		Fig. 9.4  D Fig. 9.5  D	<b>8146/5091-3<sub>r</sub></b> 
<b>Add to catalog number:</b>		Specify side facing down A or D (see above)	


For dimensional information see page F36

## PARTS AND ACCESSORIES

ILLUSTRATION/DESCRIPTION		CATALOG NUMBER
<b>Brass Plates for Flange Plates</b>   To bond metal cable glands  for 8146	Flange Size	
	1	<b>81 460 10 55 0</b>
	2	<b>81 460 33 55 0</b>
	3	<b>81 460 54 55 0</b>
<b>Brass Plates for Enclosures without Flange Plates</b>	8146/•03• Side C/D	<b>81 460 17 55 0</b>
	8146/•04• A/B C/D	<b>81 460 17 55 0</b> <b>81 460 43 55 0</b>
	8146/•05• A/B C/D	<b>81 460 11 55 0</b> <b>81 460 22 55 0</b>
	8146/•06• A/B C/D	<b>81 460 22 55 0</b> <b>81 460 16 55 0</b>
	8146/•071	A/B C/D <b>81 460 22 55 0</b> <b>81 460 23 55 0</b>
	8146/•073 & 8146/•075	A/B C/D <b>81 460 39 55 0</b> <b>81 460 42 55 0</b>
	8146/•S71	A/B C/D <b>81 460 11 55 0</b> <b>81 460 31 55 0</b>
	8146/•S73	A/B C/D <b>81 460 38 55 0</b> <b>81 460 41 55 0</b>
	8146/.081	A/B C/D <b>81 460 23 55 0</b> <b>81 460 31 55 0</b>
	8146/•083 & 8146/•085 & 8146/•086	A/B C/D <b>81 460 40 55 0</b> <b>81 460 41 55 0</b>
	8146/•091	A/B C1/D1 C2/D2 <b>81 460 30 55 0</b> <b>81 460 10 55 0</b> <b>81 460 31 55 0</b>
	8146/•093 & 8146/•095	A/B C1/D1 C2/D2 <b>81 460 41 55 0</b> <b>81 460 40 55 0</b> <b>81 460 41 55 0</b>
	Flange-enclosure	<b>81 460 32 55 0</b>

ILLUSTRATION/DESCRIPTION		CATALOG NUMBER
<b>Flange Plates Size 1</b>   in FRP	Versions 0.11" 2,8mm thick 0.23" 5,8mm thick For Mounting on: Enclosure Sides 8146/•051/•052 C/D 8146/•061/•062 A/B/C/D 8146/•071/•072 A/B/C/D 8146/•S71 C/D 8146/•081/•082 A/B/C/D 8146/•091/•092 A/B/C/D	<b>81 460 01 49 0</b> <b>81 460 04 49 0</b>
	<b>Flange Plates Size 2</b>   0.11" 2,8mm thick 0.23" 5,8mm thick For Mounting on: Enclosure Sides 8146/•073/•075 C/D 8146/•S73 C/D 8146/•083/•085/•86 A/B/C/D 8146/•093/•095 A/B/C/D	<b>81 460 05 49 0</b> <b>81 460 06 49 0</b>
<b>Flange Plates Size 3</b>   0.11" 2,8mm thick 0.23" 5,8mm thick For Mounting on: Enclosure Sides 8146/•073/•075 A/B	<b>81 460 10 49 0</b> <b>81 460 11 49 0</b>	
<b>Coupling Frames</b>  	Size 0 2.68" x 2.68" (68 mm x 68 mm)	<b>81 460 03 10 0</b>
	Size 1 5.04" x 2.68" (128 mm x 68 mm)	<b>81 460 01 10 0</b>
	Size 2 10.47" x 4.96" (266 mm x 126 mm)	<b>81 460 04 10 0</b>
	Size 3 4.96" x 4.96" (126 mm x 126 mm)	<b>81 460 11 10 0</b>
<b>Entry Hubs</b>  	<b>8166/11 mounted</b> (see page C1 and C4)  <b>8166/11 part only</b> (see page J1)	


## DIMENSIONS

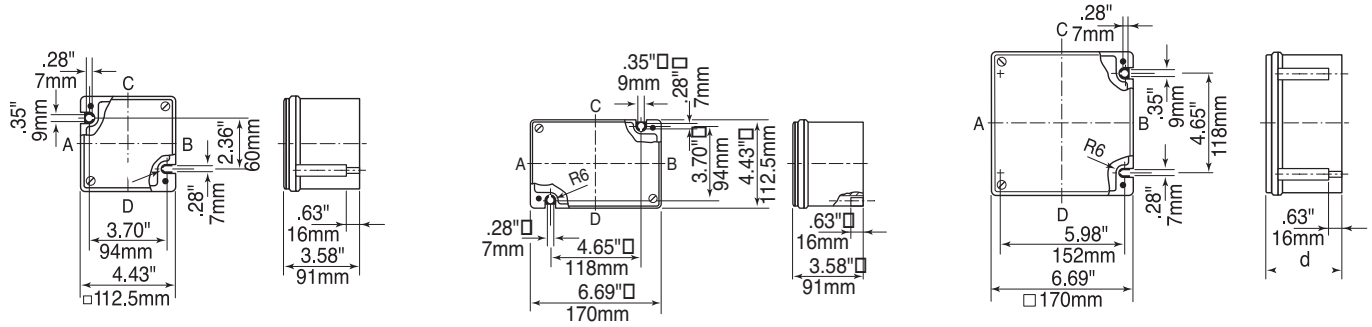


**8146/5031**

**8146/5041**


**8146/505**

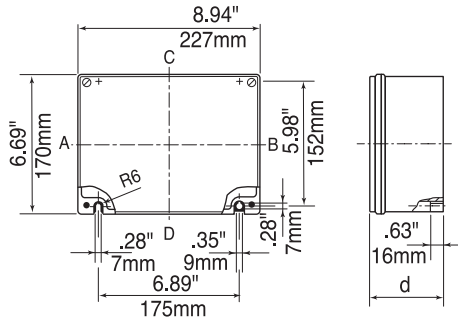


**8146/506**

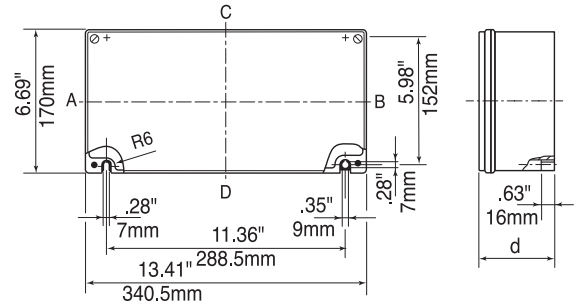

**8146/507**

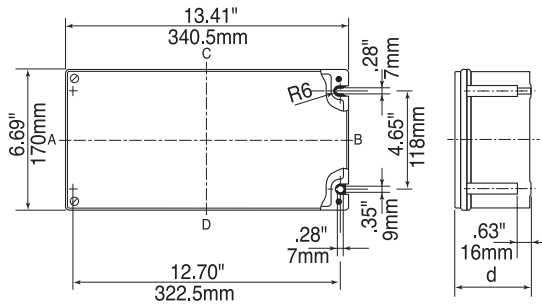


**8146/5S7**

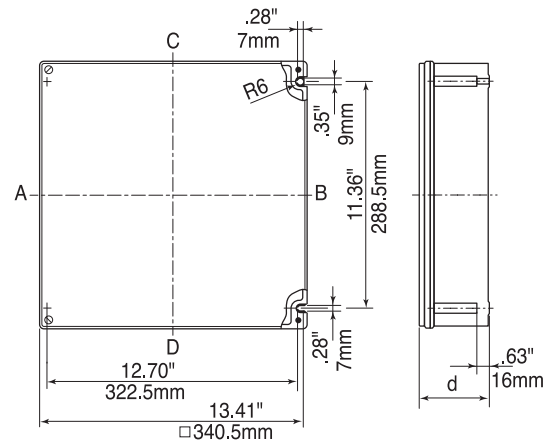

**8146/508**


Flange option: Add to overall dimensions.



Flange Thickness	Dimension F
0.11" 2.8mm	0.27" 7mm
0.23" 5.8mm	0.39" 10mm

Available Enclosure Depth (d)						
Enclosure Sizes	1	2	3	4	5	6
	3.58"	5.16"	5.91"	6.73"	7.48"	9.06"
	91mm	131mm	150mm	171mm	190mm	230mm
8146/503	x	-	-	-	-	-
8146/504	x	-	-	-	-	-
8146/505	x	x	-	-	-	-
8146/506	x	x	-	-	-	-
8146/507	x	x	x	-	x	-
8146/5S7	x	-	x	-	-	-
8146/508	x	x	x	x	x	x
8146/509	x	x	x	-	x	-

X indicates depths available.

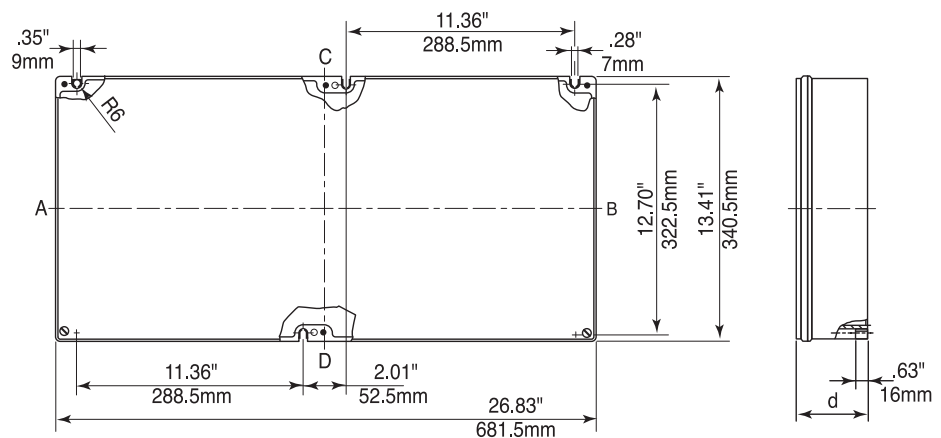

**8146/509**



## CLASSIFICATIONS

CEC  
 Class I, Zones 1 & 2  
 Ex me II T\*  
 Class I, Division 2, Groups A,B,C,D



File No. E182378



II 2 G Ex e mb II  
 PTB 99 ATEX 2158U

## IECEX


IECEX PTB 06.0056 U

Max. Voltage 250 AC/DC  
 Ambient Temperature Range:  
 +70°C (158°F) Max.  
 -50°C (-58°F) Min. \*

Ambient Temp.	Current	Temp. Classes
Ta ≤56° C	≤4.0 A	T6
Ta ≤70° C	≤4.0 A	T5
Ta ≤46° C	≤5.0 A	T5
Ta ≤70° C	≤6.3 A	T4

## FEATURES:


- The small fuse base 8560 Series is designed for 250V AC/DC for low amperage circuits from 32mA to 1.25A in quick-acting characteristic and from 2A to 6.3A in time-lag characteristic.
- The fuse base is for quick and easy snap-on mounting on DIN rails TS15, TS35 and TS32.
- They need to be mounted into "increased safety" certified enclosures i.e. the STAHL Series 8125 or 8146 Terminal or Control Enclosures.

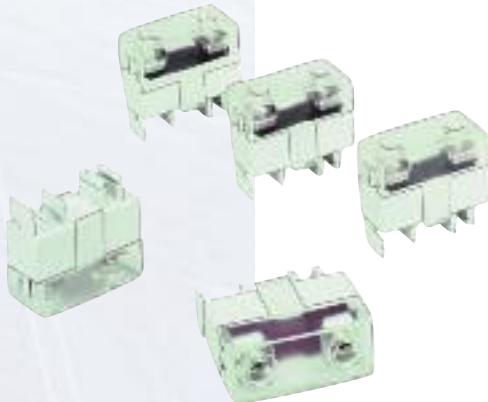

# 8560 Series, Fuses

## SMALL FUSE BASES

## Ordering Information


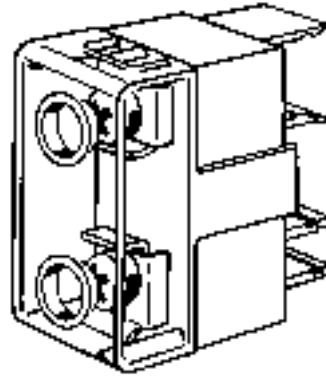


**8560**  
 Small fuse bases



**Accessories**  
 Identification Label (self adhesive)

Rated Current	Catalog Number	
<i>quick acting</i>	— 32 mA	<b>8560/51-4023</b>
	50 mA	<b>8560/51-4033</b>
	63 mA	<b>8560/51-4043</b>
	80 mA	<b>8560/51-4053</b>
	100 mA	<b>8560/51-4063</b>
	125 mA	<b>8560/51-4073</b>
	160 mA	<b>8560/51-4083</b>
	200 mA	<b>8560/51-4093</b>
	250 mA	<b>8560/51-4103</b>
	315 mA	<b>8560/51-4113</b>
	400 mA	<b>8560/51-4133</b>
	500 mA	<b>8560/51-4143</b>
	630 mA	<b>8560/51-4153</b>
	800 mA	<b>8560/51-4173</b>
	1 A	<b>8560/51-4183</b>
	1.25 A	<b>8560/51-4193</b>
<i>time lag</i>	— 2 A	<b>8560/51-4222</b>
	4 A	<b>8560/51-4252</b>
	6.3 A	<b>8560/51-4272</b>
<b>Description</b>	F1 ... F...	





## Dimensions

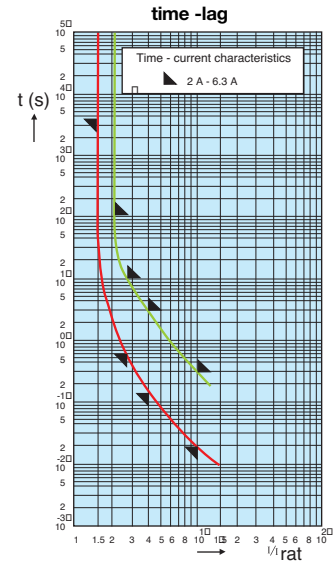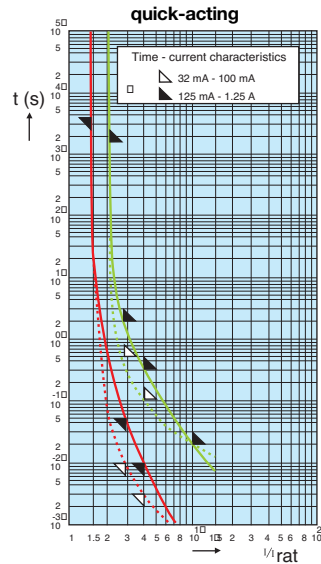

## Current/time characteristics for fuses



### Selection Table

Version	Ammeter Voltmeter	Measuring Range		Catalog Number	
			Overload Scale	Type no. for individual order	Assembly (code for installation)
 <b>8403 Ammeter</b> □ 72 mm 2.83"	direct measuring	0 -20mA 0 -1/2A 0 -4/8A 0 -10/20A 0 -15/30A 0 -25/50A	2 times	<b>8403/2-0.02/0.04</b> <b>8403/2-1/2</b> <b>8403/2-4/8</b> <b>8403/2-10/20</b> <b>8403/2-15/30</b> <b>8403/2-25/50</b>	82/0.02/0.04 82/1/2 82/4/8 82/10/20 82/15/30 82/25/50
	for current transformers	sec 1A sec 5A	} 2 and 5 times overload	<b>8403/2-1</b> <b>8403/2-5</b>	82/1 82/5
 <b>Slide-in Scale</b>	Slide-in scale for ammeters indirect measuring	for 2 times overload or for 5 times overload measuring ranges 0 ... 1; 5; 10; 15; 20; 25; 30; 40; 50; 60; 75; 100; 150; 200; 250; 300; 500		State measuring range	
 <b>8404 Voltmeter</b> □ 72 mm 2.83"	direct measuring	0 -10V 0 -100V 0 -120V 0 -150V 0 -250V 0 -500V		<b>8404/2-10</b> <b>8404/2-100</b> <b>8404/2-120</b> <b>8404/2-150</b> <b>8404/2-250</b> <b>8404/2-500</b>	79/10 79/100 79/120 79/150 79/250 79/500
 <b>Bezel</b>	Bezel	2.83" x 2.83" 72mm x 72mm (for ammeter 8403 and for voltmeter 8404)		<b>86 038 02 58 7</b>	145



### APPROVALS

 **CERTIFIED - FILE LR99480**

 **PTB 01 ATEX 2158 U**

### IECEx

**IECEx PTB 06.0017 U**

### Ammeter

The 8403 Series ammeters are used to measure current of a motor supply circuit in a potentially explosive atmosphere.

They are moving iron instruments with an accuracy class 2.5.

They are available for direct measuring up to 25 Amps, and for indirect measuring in conjunction with a current transformer either for 1 Amp or 5 Amp secondary current. For indirect measuring slide-in scales are available. Ammeter/slide-in scale must have the same ratio that the CT has. (CTs are not supplied).

A red pointer can be manually adjusted for quick visual comparison of the actual value with the set value.

### Voltmeter


The 8404 Series of voltmeters are used to measure voltage of a motor supply circuit in a potentially explosive atmosphere.

They are moving iron instruments with an accuracy class 2.5.

A red pointer can be manually adjusted for quick visual comparison of the actual value with the set value.

Both 8403 Ammeters and 8404 Voltmeters are suitable to mount into increased safety enclosures Series 8125 or 8146.

### Dimensions

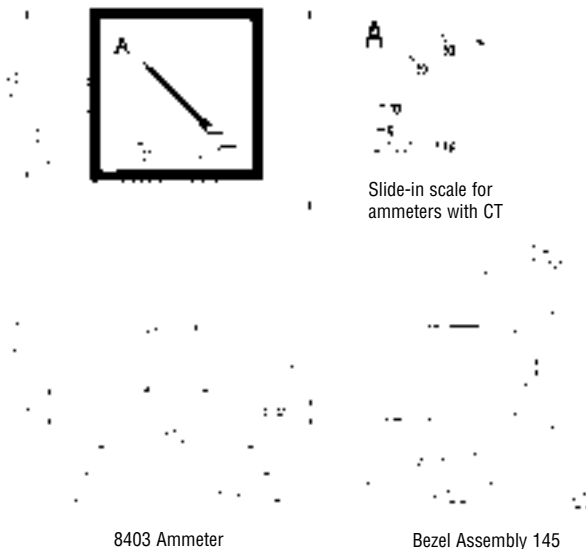

8403 Ammeter and Voltmeter 8404 with bezel assembly 145

8403 Ammeter

Bezel Assembly 145





### APPROVALS

FILE No. E182378

PTB 00 ATEX 1031U

IECEX  
IECEX PTB 06.0011 U

The lockout Terminal 8082/1-1-01 has one NC contact and is operated by the black lever. It is also lockable with a padlock.

Each block is made of polyamide and designed to contain an internal explosion.

The terminals are designed to increased safety "e" requirements.

## 8082 LOCKOUT TERMINAL

### Ordering Information

DESCRIPTION	CONTACT SYMBOL		INDIVIDUAL ORDER CATALOG NUMBER
	IEC	NEMA	
Lockout Terminal, 1 NC			8082/1-1-01

### Technical Data

	NEC/CEC	IEC
Rated Voltage	600VAC	500VAC
Continuous Current	10A	6A
Terminals	12AWG	2.5mm <sup>2</sup>
Mechanical Life	≥ 10 <sup>6</sup> operations	
Electrical Life	≥ 10 <sup>6</sup> operations	
Housing Material	polyamide	
Contact Material	silver plated	
Lowest Energy	50mA. @ 12VAC/DC*	

\* For lower energy use gold plated contacts, available on request.



# 8146 Series Fire Alarm Stations

HAZARDOUS LOCATIONS

ALARM

STAHL



## 8146 Fire Alarm Stations Features:

- The Fire Alarm Station is made from corrosion resistant fiberglass reinforced polyester. The enclosure is molded from highly visible bright red material.
- The enclosure gasket is made from polyurethane and is installed into recessed cover groove.
- The cover screws are captivated, slotted and made of 316 grade stainless steel.
- 1/2" and 3/4" hubs are available in dead-end and feed-thru configurations.
- A hammer is mounted to the side of the alarm station and is attached by an 11" chain.

STAHL

INNOVATIVE EXPLOSION PROTECTION by R. STAHL 1-800-782-4357

G



**CLASSIFICATIONS**

NEC- Class I, Zones 1 & 2 AEx de IIC T6  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Division 2, Groups F,G  
 Class III  
 Type 3, 4 & 4X; IP66  
 IEC FILE No. E182378



CEC- Class I, Zones 1 & 2 Ex de IIC T6  
 Class I, Division 2, Groups A,B,C,D  
 Class II, Divisions 1 & 2, Groups E,F,G  
 Class III



CSA ENCLOSURES 3, 4 & 4X; IP66  
 CERTIFIED - FILE No. LR99480



II 2 G Ex de IIC T6, Zones 1 & 2, IP66  
 PTB 01 ATEX 1105

**Ambient Temperature Range:**

+40°C (+104°F) Max.  
 -20°C (-4°F) Min.

**Special Ambient Temperature Range:\***

+60°C (+140°F) Max.  
 -50°C (-58°F) Min.  
 \*Consult Factory

**Automatic Model-1.5" (38mm) O.D. Red Momentary Pushbutton Actuator is released when glass is broken.**

CONTACT TYPE	HUB CONFIGURATION	1/2"	3/4"
Universal (1 NO/1 NC)	Top Feed	8146/5052-C8140	8146/5052-C8143
	Bottom Feed	8146/5052-C8141	8146/5052-C8144
	Feed-Thru	8146/5052-C8142	8146/5052-C8145


**Manual Model-1.5" (38mm) O.D. Red Mushroom Pushbutton Maintained Turn-to-Release.**

CONTACT TYPE	HUB CONFIGURATION	1/2"	3/4"
Universal (1 NO/1 NC)	Top Feed	8146/5052-C7960	8146/5052-C7963
	Bottom Feed	8146/5052-C7961	8146/5052-C7964
	Feed-Thru	8146/5052-C7962	8146/5052-C7965

**Manual Model-1.5" (38mm) O.D. Red Mushroom Pushbutton Maintained Key to Release.**

CONTACT TYPE	HUB CONFIGURATION	1/2"	3/4"
Universal (1 NO/1 NC)	Top Feed	8146/5052-C7970	8146/5052-C7973
	Bottom Feed	8146/5052-C7971	8146/5052-C7974
	Feed-Thru	8146/5052-C7972	8146/5052-C7975

**Dimensions**

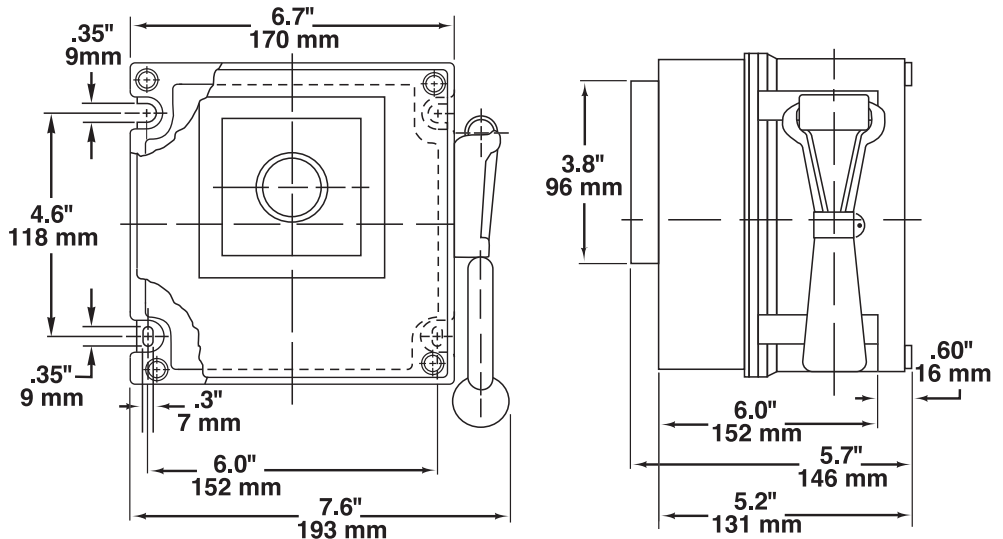

**Application**

These Fire Alarm Stations are used to activate alarm circuits in hazardous and/or wet, corrosive industrial applications. The fire alarms are of the break-glass type construction.

Two styles of stations are available:

Automatic Model- after glass is broken, actuator is automatically released to activate alarm circuit.

Manual Model- after glass is broken, actuator must be pushed to activate alarm circuit.





### Yodalex YL6/Y06FL6 Series


#### Features:

- *YL6 Football shaped horn/strobe combination unit weighs only 13 pounds*
- *Omni Directional high output horn 110dB max @ 1 meter*
- *2 stage alarm, independently selectable 2nd stage*
- *All units share a common explosion proof housing - machined flame paths*
- *Meets UL, CUL, CSA, GOST, ATEX and IECEx Approvals*
- *ATEX / IECEx Approved for Gas & Dust (Zone 1 & 2, 21 & 22)*
- *Dual cable entry*
- *Aluminium enclosure with stainless steel hardware*
- *Lens guard provided as standard*
- *5 Joule xenon - flash rate 1 per second.*
- *Weather proof flame retardant ABS compliant horn*
- *7 Lens colors in flame retardant polycarbonate*
- *32 selectable tones meeting international regulations*
- *Easy sound selection via DIL switches*
- *10 & 20 Joule Beacon available with ATEX or IECEx certification*
- *Telephone initiate available on ATEX or IECEx models*





## DIMENSIONS

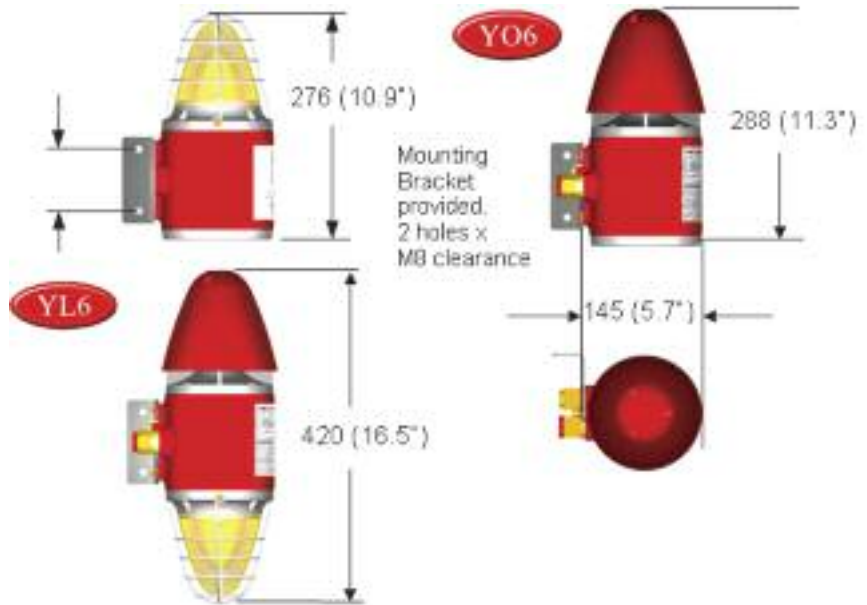

### CLASSIFICATIONS

#### NEC & CEC

Class I, Division 1, Groups BcD  
 Class II, Divisions 1, Groups E,F,G (V6 Only)  
 File No. E161818

II 2G Ex d IIB T4 Gb  
 II 2G Ex d IIB, H2 T4  
 II 2D IP66 T130°C  
 BASEEF A 02 ATEX 0212 x  
 BASEEF A 02 ATEX 0222 x


#### IECEX

Ex d IIB t4 Gb  
 Ex d IIB, H2 T4  
 Ex tb IIIC T135°C Db IP66  
 IECEX BAS 05.0086 X and  
 IECEX BAS 05.0087 X

#### Ambient Temperature Range:

+60°C (+140°F) Max.  
 -20°C (-4°F) Min.

## PRODUCT ORDERING CONFIGURATOR - Global Options

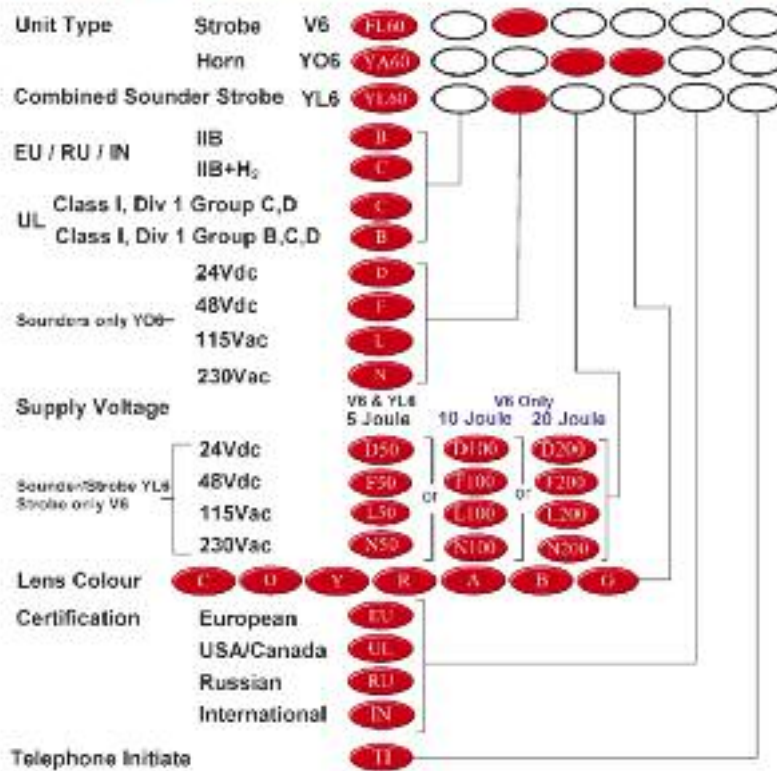

5 Joule beacons & combo units, V6 10 & 20 joule beacons only available with ATEX, or IECEX approval.

# 8146/5-6 Series Disconnects

DISCONNECT SWITCHES FOR HAZARDOUS & CORROSIVE ENVIRONMENTS



DISTRIBUTION

STAHL

## Disconnects 8146/5-6 Series Features:

- 16A, 32A, 63A and 125A models.
- Enclosures made of Fiberglass Reinforced Polyester (FRP) with recessed gasket and captive stainless steel cover screws.
- 3 pole (plus auxiliary) horsepower rated switch.
- Increased safety terminals and integrated ground bar.
- Large grip, lockable handle.
- Multiple entry methods available (see section J).
- No seals required for Division 2 application.



# 8146/5-6 Series DISCONNECTS

DISCONNECT SWITCHES FOR  
HAZARDOUS & CORROSIVE ENVIRONMENTS

**CLASSIFICATIONS**

NEC- Class I, Zone 1 AEx de IIC T6†  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 1 and 2,  
Groups E,F,G  
Class III  
Enclosure 3, 4, 4x, IP66  
File No. J.I. 2Q0A4.AX  
J.I. 2X5A0.AE



†Zone 1 Approval Applied for

CEC- Class I, Zone 1 Ex de IIC T6  
Class I, Division 2, Groups A,B,C,D  
Class II, Divisions 1 and 2  
Groups E,F,G  
Class III  
File No. L.R. 99468



II 2G Ex de IIC T6  
Zone 1 & 2  
Ingress Protection IP66  
PTB 01 ATEX 1024

Ambient Temperature Range  
+40°C (+104°F) Max.  
-20°C (-4°F) Min.

Special Temperature Range\*  
+55°C (+131°F) Max.  
-40°C (-40°F) Min.  
\*Consult Factory


**Applications**

The DISCONNECTS 8146/5-6 series are horsepower rated for motor load applications. While the product is load rated, no short circuit protection is designed into the switch.

To provide adequate short circuit protection, properly sized Class J fuses must be installed in the circuit upstream from the switch.

Due to the design of the switch, no external sealing fittings are required for Class I, Division 2 applications. Some Class II applications may require installation of seals. Consult the National Electrical Code Article 502-5 or the Canadian Electrical Code Section 18 (154) for specific instructions.

STAHl offers the DISCONNECT Series 8146/5-6 constructed to meet the most demanding environments. The Disconnect 8146/5-6 Series provides safety in hazardous and corrosive locations.

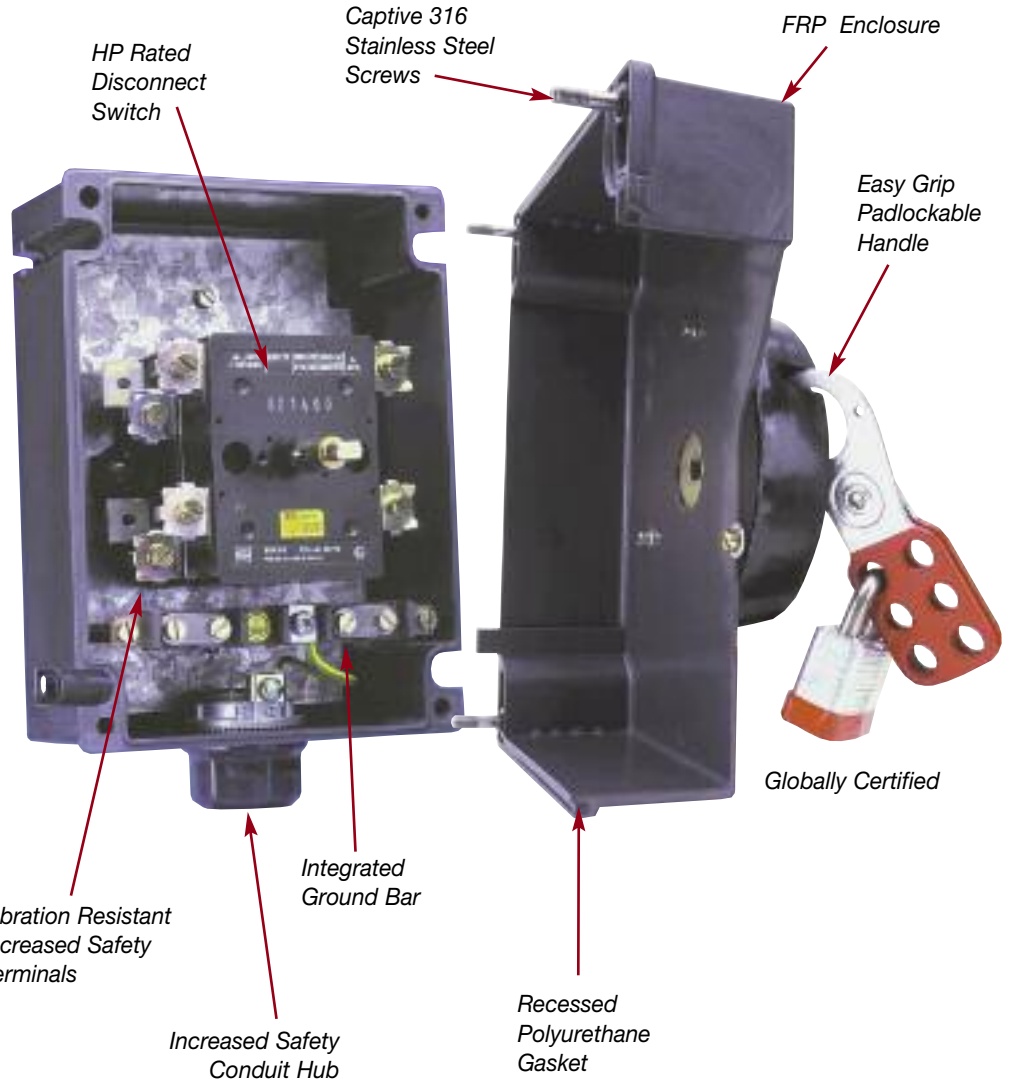

**Technical Data**

		16 AMP.	32 AMP.	63 AMP.	125 AMP.
RATED VOLTAGE	AC	600	600	600	600
RATED VOLTAGE	DC	220	-	-	-
HORSE POWER	600VAC	10	30	60	125
	480VAC	10	20	40	100
	240VAC	5	10	20	40
	120VAC	2	5	10	20
TERMINALS	AWG	12	4	2	4/0
	STRANDED (mm²)	2.5	16	25	95
	SOLID (mm²)	-	25	35	120
BACK-UP FUSE (Required)	Class J	20 MAX	40 MAX	100 MAX	200 MAX




# 8146/5-6 Series DISCONNECTS

DISTRIBUTION

DISCONNECT SWITCHES FOR  
HAZARDOUS & CORROSIVE ENVIRONMENTS



- A - 16 AMP DISCONNECTS SERIES
- B - 32 AMP DISCONNECTS SERIES
- C - 63 AMP DISCONNECTS SERIES
- D - 125 AMP DISCONNECTS SERIES



Installation Example

## 8146/5-6 Disconnect Logic

8146/5-6		HUBS
02 - 16 AMP	---	000 - NO HUBS
04 - 32 AMP		001 - 1/2" NPT
06 - 63 AMP		002 - 3/4" NPT
09 - 125 AMP		003 - 1" NPT
		004 - 1-1/4" NPT
		005 - 1-1/2" NPT
		006 - 2" NPT
		007 - 2-1/2" NPT
		008 - 3" NPT
0 - NO ENTRY	---	COMPRESSION CABLE GLANDS (CABLE O.D.)
3 - TOP FEED ENTRY		M16 .20" - .30"
4 - BOTTOM FEED ENTRY		M20 .25" - .50"
5 - FEED THROUGH ENTRY		M25 .50" - .67"
6 - 2 TOP ENTRIES		M32 .40" - .70"
7 - 2 BOTTOM ENTRIES		M40 .65" - 1.00"
		M50 .91" - 1.25"
	M63 1.26" - 1.73"	

## Ordering Information


CATALOG NUMBER			AMP.	HUB SIZE	ENCLOSURE
WITHOUT HUBS	FEED THROUGH ENTRY (Top & Bottom)	FEED THROUGH ENTRY (2 Hubs In Bottom)			
8146/5-602-0000	8146/5-602-5002	8146/5-602-7002	16	3/4"	8146/5052-D
8146/5-604-0000	8146/5-604-5003	8146/5-604-7003	32	1"	8146/5062-B
8146/5-606-0000	8146/5-606-5006	8146/5-606-7006	63	2"	8146/5083-D
8146/5-609-0000	8146/5-609-5007	8146/5-609-7007	125	2 1/2"	8146/5095-B

Modifications of the standard designs are possible e.g. auxiliary contacts entry parts, additional terminals.




INNOVATIVE EXPLOSION PROTECTION by R. STAHL 1-800-782-4357


DIMENSIONS

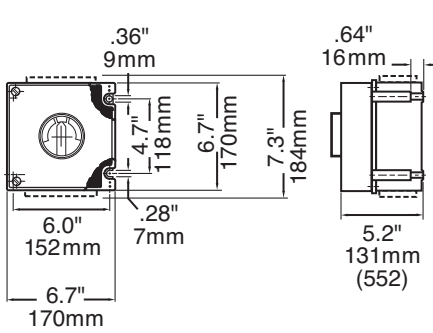


16A DISCONNECT SWITCH  
8146/5-602 Series

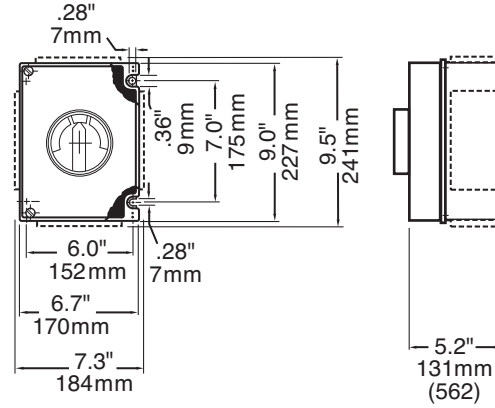

32A DISCONNECT SWITCH  
8146/5-604 Series

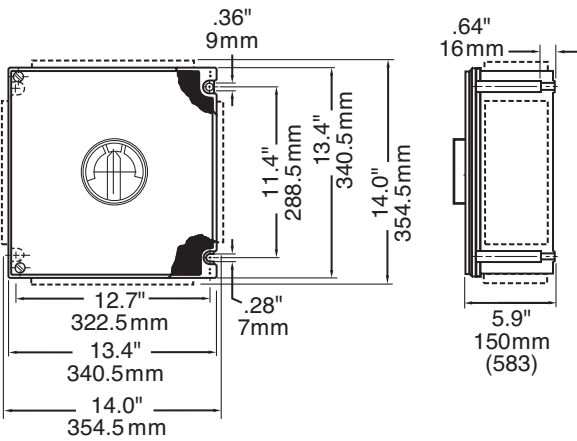

63A DISCONNECT SWITCH  
8146/5-606 Series

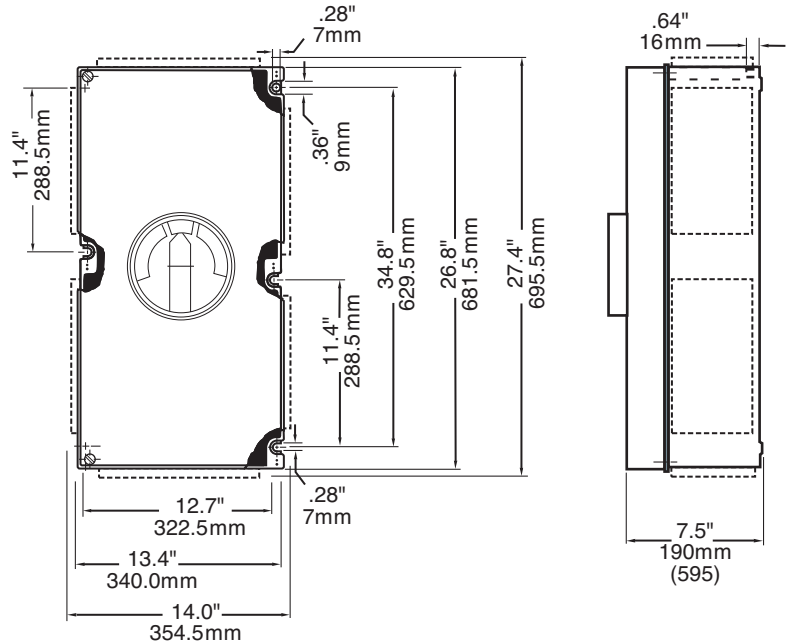

125A DISCONNECT SWITCH  
8146/5-609 Series



### Applications:

- For hazardous classified locations due to explosive gas atmospheres
- Petroleum refineries, oilsands, chemical and petrochemical facilities with indoor or outdoor processes
- Applications requiring overcurrent and short circuit protection for power, lighting, and heat tracing.

### Features:

- Extremely easy to maintain. Simply enter the enclosure by turning the door handle and gaining access to the breaker compartment. There is no need to remove dozens of bolts to change a breaker.
- Lightweight and easy to install compared to traditional explosion proof construction. Expensive lift equipment often not needed.
- Window doors allow easy viewing of breaker positions without opening the enclosure.
- R. STAHL 8562 series circuit breakers with 10KA interrupt ratings meet all necessary North American requirements. See page H7.
- 8562 series breakers are padlockable in the off position.
- GFIs and GFCIs are also available for ground fault protection. See pages H11 - H12.
- Seamless foam in place gaskets exclude contaminants and liquids ensuring long life of interior components.
- Available in brushed stainless steel, epoxy powder coated, and fiberglass for maximum corrosion resistance.
- 316L stainless steel hardware provided for all external components to prevent corrosion.
- NEMA 4X padlocking 316L SS handle and internal heavy duty 3 point latching system combine security and a watertight seal with ease of access.
- No cable or conduit seals are required, allowing for fast installation and lowering overall installed cost.
- Standard bottom entry reduces risk of moisture ingress. (Top entry is available)
- Finger safe construction & UL508A approved bus system prevents accidental contact with live parts.
- Enclosures are easily punched in the field. No drilling and tapping required.

\*Breaker information located on pages H9 - H11.



### CLASSIFICATIONS of Breaker NEC

Class I, Zone 2 Group IIC, T4  
Class I, Div. 2, Groups B, C & D, T4

### CEC

Class I, Zone 2 Group IIC, T4  
Class I, Div. 2 Groups B, C & D, T4



Environmental Protection  
Type 3, 4, 4X; IP66

### SAVE INSTALLATION TIME

- Avoid removing dozens of bolts as with traditional explosion proof ferrous systems.
- No expensive seals
- No drill and tapping enclosures
- Light weight design (No need for expensive lift equipment)

### SAVE ON MAINTENANCE

- Window doors allow easy viewing.


### LAST LONGER

- Stainless Steel, and fiberglass options outlast traditional cast aluminum in corrosive environments

### WORK SAFER

- Finger safe construction prevents accidental contact with live parts.
- Padlockable breakers



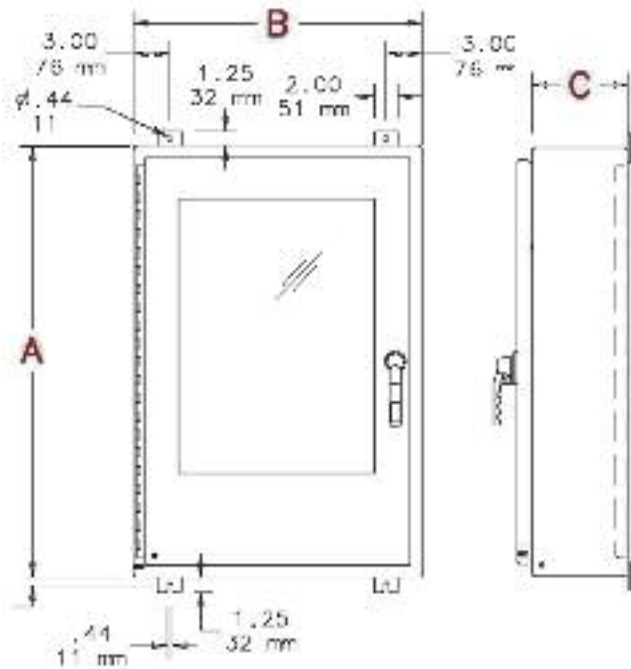

BROZTM Zone 2 PANELBOARDS		BRZ	.	.	..	..	.....	.....	...
		BRZ	3	3	SS	3B	361P30	21P16	D-W
		a	b	c	d	e	f	f	g
a	Class I, Division 2/Zone 2 Circuit Breaker Panelboard								
b	1 = 100A 2/0 main lugs (12cct) 2 = 225A 250 mcm main lug (24cct) 3 = 300A 250 mcm main lug (42cct and 60cct)								
c	1 = 208Y/120V AC, 3 phase, 4 wire 2 = 120/240V, 1 phase, 3 wire 3 = 480Y/277V AC, 3 phase, 4 wire								
d	Enclosure material SS = Stainless Steel ST = Powder Coated Steel								
e	Enclosure size (Length <b>A</b> x Width <b>B</b> x Depth <b>C</b> ) 1 = 12 circuit – 24" x 24" x 8" ( 610mm x 610mm x 203mm) 2 = 24 circuit – 30" x 24" x 8" ( 762mm x 610mm x 203mm) 3 = 42 circuit – 48" x 30" x 8" (1219mm x 762mm x 203mm) 4 = 60 circuit – 60" x 30" x 8" (1524mm x 762mm x 203mm) B = Bottom Entries T = Top Entries								
f	Qty # poles/amp rating 1, 2, 3 pole breakers, available up to 40 amp, 277/480V xx – Qty of Breakers 1P – 1pole breaker(s) 2P – 2pole breaker(s) 3P – 3pole breaker(s) xx – Amps of breaker EPD – 30 mA GFI GFCI – 5 mA GFCI Personal Protection Breaker								
g	Options D = NEMA 4X Drain P = Breaker Padlock W = Window								



\*60 circuits available for Canada  
Class I, Division 2, Class I, Zone 2



# 8146/5 Series Breaker Panelboards

BREAKER PANELBOARDS FOR HAZARDOUS & CORROSIVE ENVIRONMENTS


DISTRIBUTION



## Breaker Panels

### Features:

- *Wide variety of Flameproof branch circuit breakers for Zone 1 & Division 2 to UL 489 & CSA C22.2 No. 5*
  - *Thermal-magnetic branch circuit breaker protection, 40A max.*
  - *Mounted under hinged window flaps for easy actuation.*
  - *Shunt trips (optional).*
  - *Lockout on breaker and window flap.*
  - *Line and load side factory wired to “increased safety” terminals, ready for field connections*
  - *Flameproof Ground Fault Interrupters*
- *Flameproof main disconnect switches 125A max. with lockout provision (optional).*
- *FRP “increased safety” enclosures*
  - *Suitable for wet and corrosive locations*
  - *Impact resistant*
  - *Light weight*
  - *Wall mounting frames available*
  - *Flange Plates can be fitted with “Increased Safety” certified conduit hubs or cable glands (see section J).*
  - *No seals required for Division 2 application.*

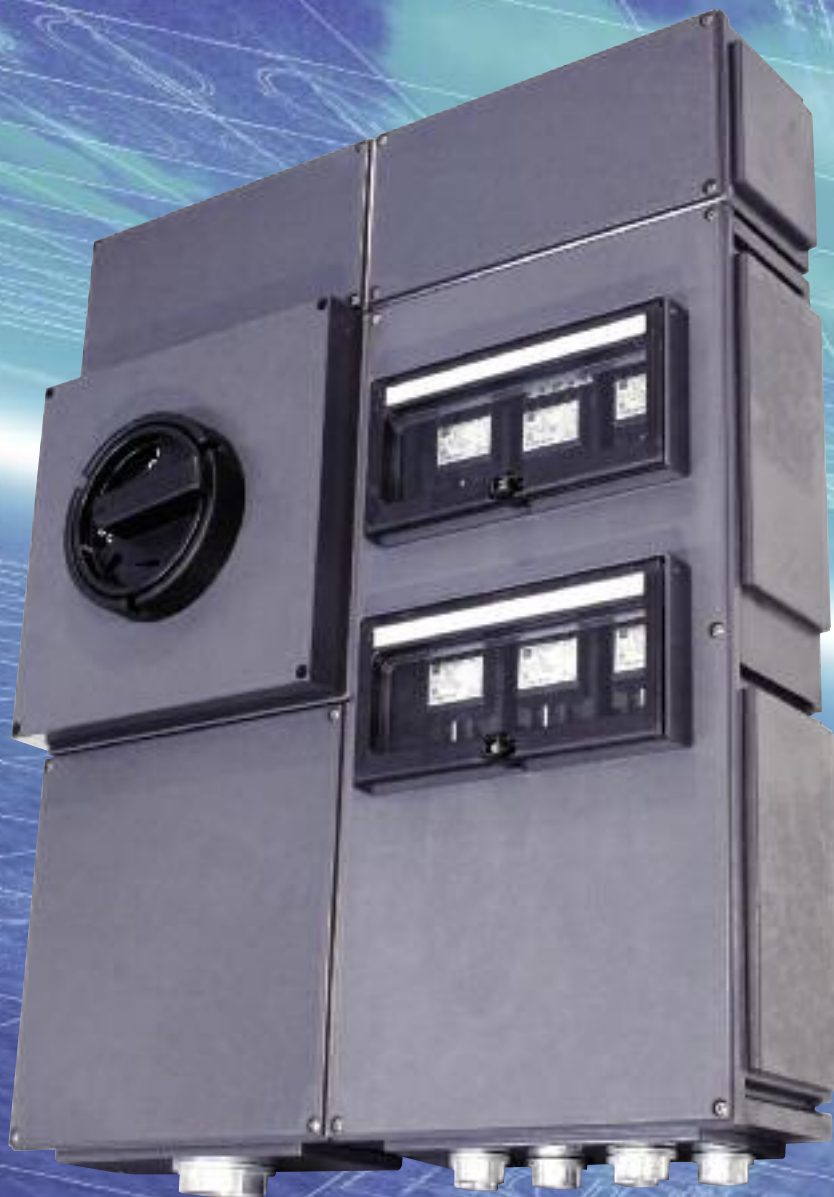



**CLASSIFICATIONS**

NEC- Class I, Zone 1 AEx de IIC T5 or T6  
Class I, Division 2, Groups A,B,C&D



CEC- Class I, Zone 1 Ex de IIC T5 or T6  
Class I, Division 2, Groups A,B,C&D

Environmental Protection  
Type 3, 4, 4X; IP66

Ambient Temperature Range  
+40°C (+104°F) Max.  
-20°C (-4°F) Min.

**Applications**


The series 8146/5 Breaker Panelboards provide a switching system with short circuit protection, overload protection and ground fault protection for feeder and branch circuits to control either resistive or inductive loads. Applications would be heating, lighting, heat tracing and motor circuits in refineries, chemical and petrochemical plants and other process industries. They are available with or without Main Disconnect. To provide adequate short circuit protection, properly sized Class J fuses must be installed in the circuit upstream for protection of the Main Disconnect Switch.

**8146/5 Series Breaker Panelboards**

BREAKER PANELBOARDS FOR HAZARDOUS & CORROSIVE ENVIRONMENTS

**Quick and Easy Access to Breaker**

**Modular “increased safety” enclosures made of FRP for indoors and outdoors, damp, wet corrosive and hazardous locations**

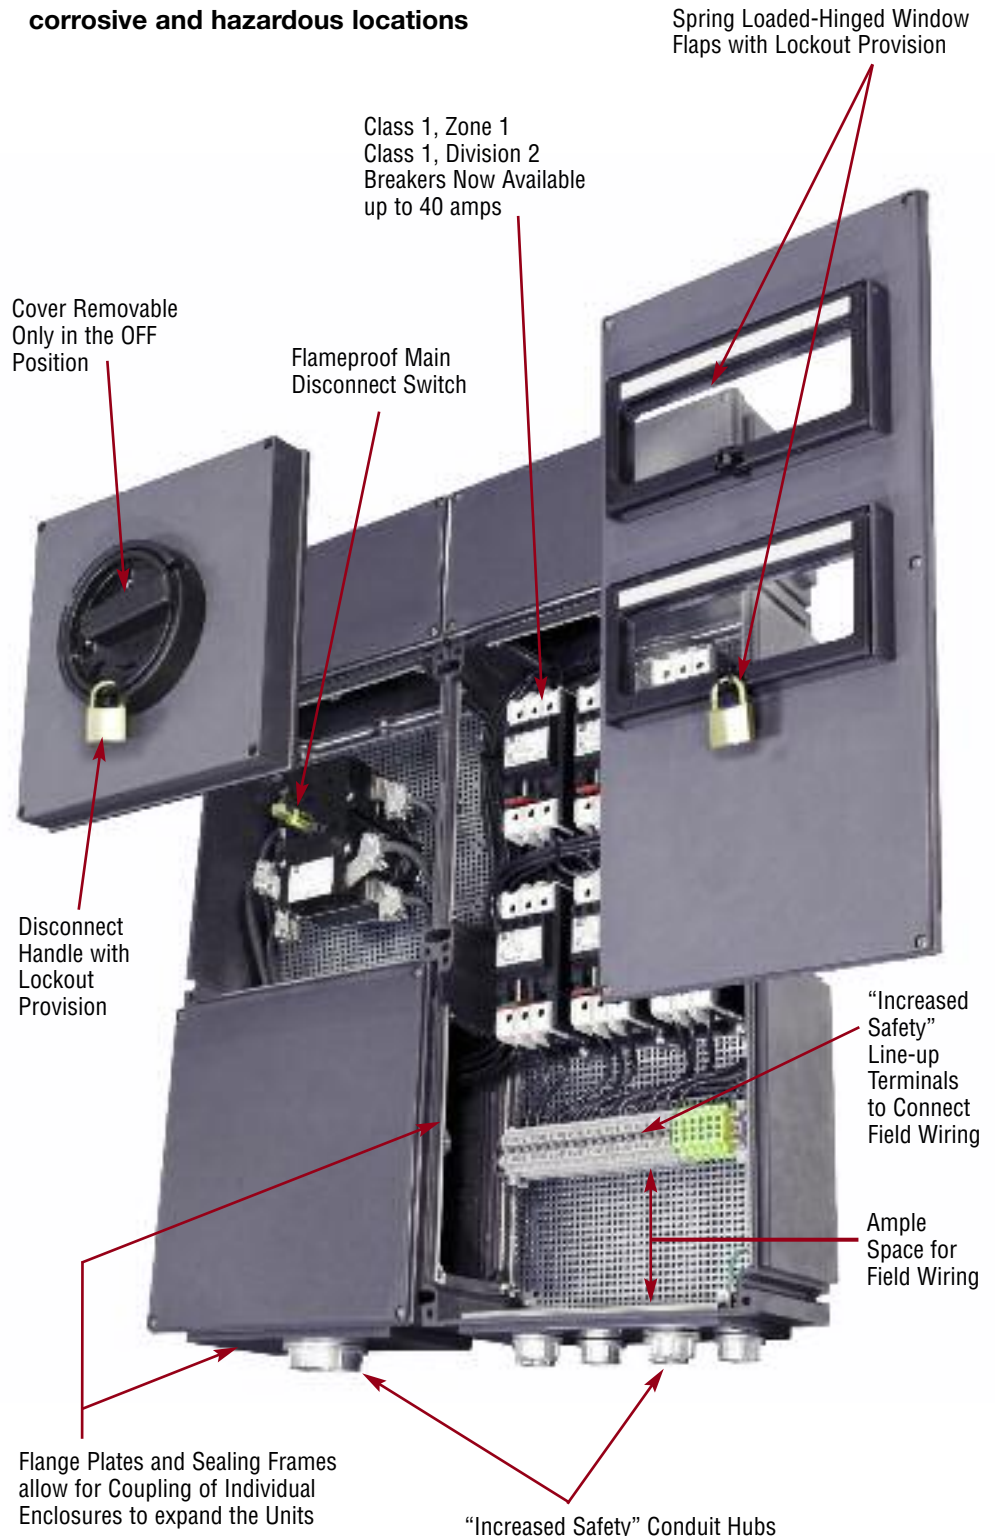

### BREAKER PANELBOARDS FOR HAZARDOUS & CORROSIVE ENVIRONMENTS



Conduit hubs or cable glands can be installed with back-up bonding plates, as shown above or with "increased safety" grounding locknuts which are interconnected with green jumper wire and also connected to the ground system.

For details see page C3, and for spacing see page C4.



Springloaded - hinged window flaps allow easy viewing and quick access to breakers without opening the enclosure.

Individual breakers and the window flaps can be padlocked.

Max. Number of Ex MCBs Under One Window Flap	Ex MCBs
6	1 pole
4	2 pole
3	3 pole




Technical Data of Main Disconnect Switches			
Type	Voltage ac	Amperage	Back-Up Fuse J
8543/1	600	40	60 A max.
8543/2	600	63	100 A max.
8548/1	600	125	200 A max.





The Disconnect Switches are made of FRP to safely contain the pressure generated by an internal explosion.

Optional auxiliary contacts are available.



DIMENSIONS

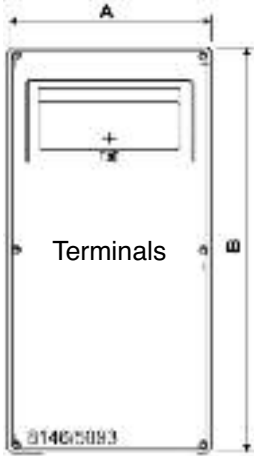

Layout without Disconnect Switch

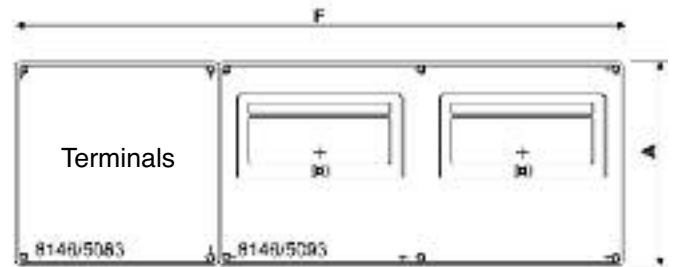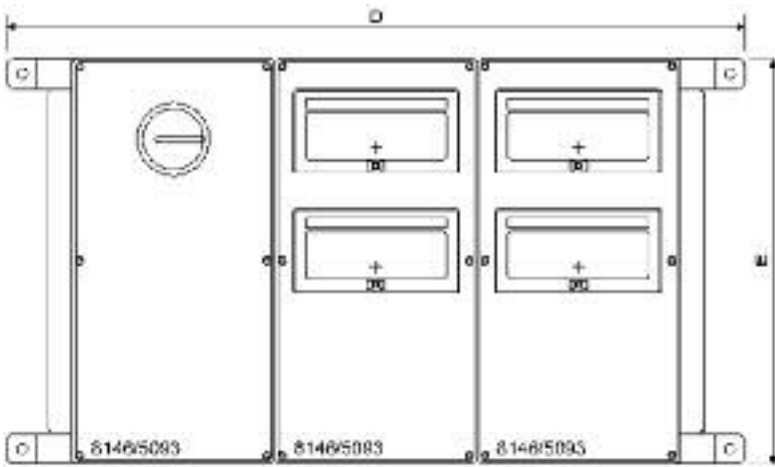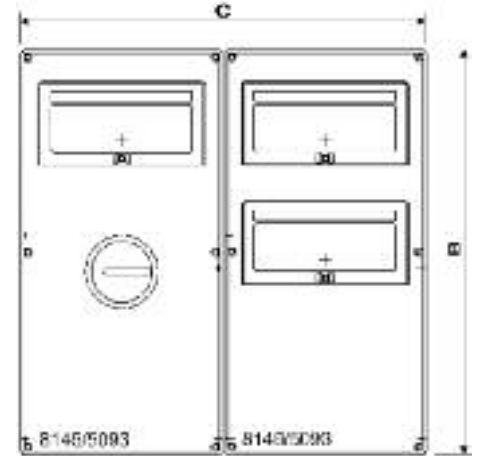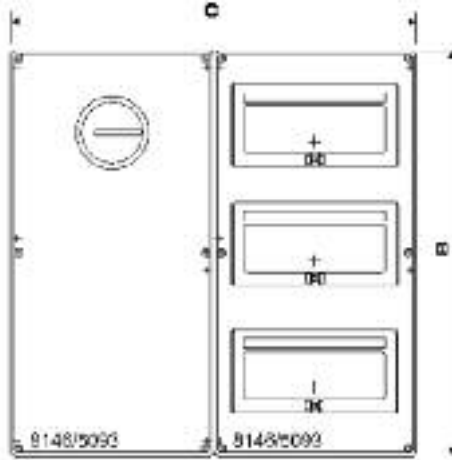

Layout without Disconnect Switch

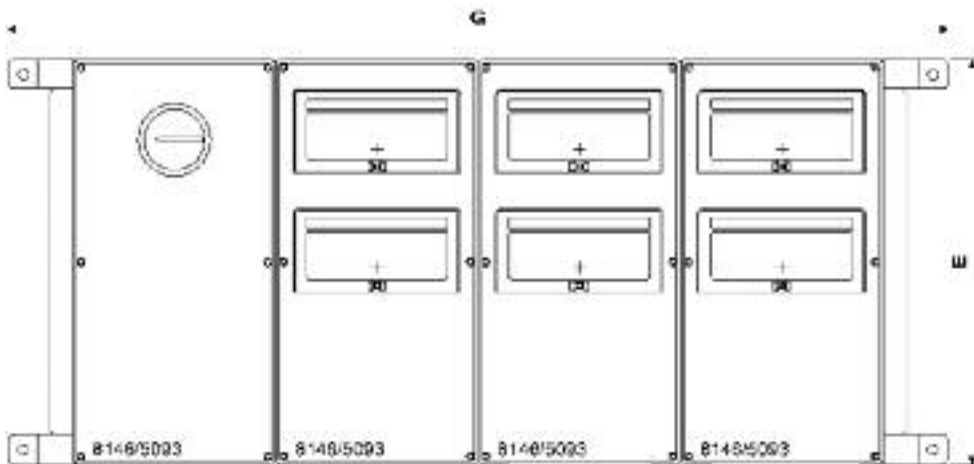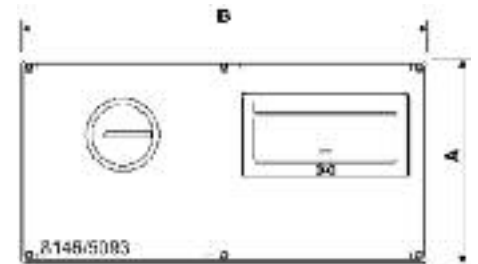

8146/5 Panelboard Dimensions	
Callouts	mm / inches
A	340.50 / 13.41
B	681.50 / 26.83
C	682.00 / 26.85
D	1236.00 / 48.66
E	684.00 / 26.93
F	1023.00 / 40.28
G	1578.00 / 62.13

# 8146/5 Series Breaker Panelboards

THERMAL-MAGNETIC Ex MCBs TO UL 489 & CSA C22.2 No.5

DISTRIBUTION



## 1 Pole Ex MCB, 8562/51 Series

Amp Rating at Ta = 25°C	Catalog Number 277 Vac, 10 kAIC
0.2	8562/51-1430-002
0.3	8562/51-1430-003
0.5	8562/51-1430-005
0.75	8562/51-1430-008
1.0	8562/51-1430-010
1.6	8562/51-1430-016
2	8562/51-1430-020
3	8562/51-1430-030
4	8562/51-1430-040
5	8562/51-1430-050
6	8562/51-1430-060
8	8562/51-1430-080
10	8562/51-1430-100
13	N/A
15	8562/51-1430-150
16	8562/51-1430-160
20	8562/51-1430-200
25	8562/51-1430-250
30	8562/51-1610-300
32	8562/51-1610-320
40	8562/51-1610-400



## CLASSIFICATIONS of Breaker

NEC

Class I, Zone 1, AEx de IIC T5 or T6  
Class I, Div. 2, Groups A, B, C & D

CEC

Ex de IIC T5 or T6  
Class I, Div. 2, per: CEC J18-150 (C)



Certified File No. 1850696



File No. 3033692

## FEATURES

- Method of Protection: Flameproof 1, 2 and 3 Pole with Thermal - Magnetic Branch Circuit Protection
- Design to UL 489 and CSA-C22.2 No. 5-02
- Options: Shunt Trip
- Breakers are not temperature compensated

## 2 Pole Ex MCB, 8562/52 Series

Amp Rating at Ta = 25°C	Catalog Number 480Y/ 277 Vac, 10 kAIC
0.2	8562/52-2430-002
0.3	8562/52-2430-003
0.5	8562/52-2430-005
0.75	8562/52-2430-008
1.0	8562/52-2430-010
1.6	8562/52-2430-016
2	8562/52-2430-020
3	8562/52-2430-030
4	8562/52-2430-040
5	8562/52-2430-050
6	8562/52-2430-060
8	8562/52-2430-080
10	8562/52-2430-100
15	8562/52-2430-150
16	8562/52-2430-160
20	8562/52-2430-200
25	8562/52-2430-250
30	8562/52-2610-300
32	8562/52-2610-320
40	8562/52-2610-400



## 3 Pole Ex MCB, 8562/53 Series

Amp Rating at Ta = 25°C	Catalog Number 480Y/ 277 Vac, 10 kAIC
0.2	8562/53-3430-002
0.3	8562/53-3430-003
0.5	8562/53-3430-005
0.75	8562/53-3430-008
1.0	8562/53-3430-010
1.6	8562/53-3430-016
2	8562/53-3430-020
3	8562/53-3430-030
4	8562/53-3430-040
5	8562/53-3430-050
6	8562/53-3430-060
8	8562/53-3430-080
10	8562/53-3430-100
15	8562/53-3430-150
16	8562/53-3430-160
20	8562/53-3430-200
25	8562/53-3430-250
30	8562/53-3610-300
32	8562/53-3610-320
40	8562/53-3610-400



EXPLOSION PROTECTION by R. STAHL 1-800-782-4357

H10



# 8562/5 Ground Fault Interrupter

EQUIPMENT PROTECTION EX GFI SERIES 8562/5

**CLASSIFICATIONS of Ex GFIs**

NEC & CEC  
 Class I, Zone 1, AEx de IIC T5 or T6  
 Class I, Division 2, Ex Groups A, B, C & D (US)  
 Class I, Division 2, per CEC J18-150 (C)

ATEX & IEC  
 II G Ex de IIC Gb

Designed to  
 ANSI/UL 1053  
 CSA C 22.2 No. 144 & IEC61008

**Electrical Data**  
 480Y/277 Vac/Main Contact(s)  
 120Vac Auxiliary/Alarm Contact, 2 Amps

**Ambient Temperature:**  
 +40 C (+104F) Max  
 -20 C (-4F) Min

**Short Circuit**  
 Switch Capacity-10kA symRms  
 When in circuit with properly sized  
 current limitation device.

**FEATURES**

The Ex GFI Series 8562/5 is an explosion protected ground fault interrupter which assures ground fault protection for equipment and to a lesser extent personnel protection. The 8562/53 and 8562/54 can come with one Auxiliary contact, actuated by the breaker handle or one Alarm Contact actuated in case of ground fault.



1 Pole +N or 2 Pole				
Switch Capacity	Catalog Number	Configuration	Aux or Alarm	Leakage Current
16A	8562/52-2500-160	2-pole/ 1-p+N	none	10mA
25A	8562/52-2510-250	2-pole/ 1-p+N	none	30mA
40A	8562/52-2510-400	2-pole/ 1-p+N	none	30mA



1 Pole +N or 2 Pole with Auxiliary/Alarm Contact				
Switch Capacity	Catalog Number	Configuration	Aux or Alarm	Leakage Current
16A	8562/53-2501-160	2-pole/ 1-p+N	1xNOAux	10mA
	8562/53-2502-160		1xNOAla	
	8562/53-2503-160		1xNCAux	
	8562/53-2504-160		1xCOAux	
	8562/53-2505-160		1xCOAla	
25A	8562/53-2507-160	2-pole/ 1-p+N	1xNCAla	30mA
	8562/53-2511-250		1xNOAux	
	8562/53-2512-250		1xNOAla	
	8562/53-2513-250		1xNCAux	
	8562/53-2514-250		1xCOAux	
40A	8562/53-2515-250	2-pole/ 1-p+N	1xCOAla	30mA
	8562/53-2517-250		1xNCAla	
	8562/53-2511-400		1xNOAux	
	8562/53-2512-400		1xNOAla	
	8562/53-2513-400		1xNCAux	
40A	8562/53-2514-400	2-pole/ 1-p+N	1xCOAux	30mA
	8562/53-2515-400		1xCOAla	
	8562/53-2517-400		1xNCAla	
	8562/53-2517-400		1xNCAla	



3 Pole +N with Auxiliary/Alarm Contact				
Switch Capacity	Catalog Number	Configuration	Aux or Alarm	Leakage Current
25A	8562/54-4510-250	3-p+N	none	30mA
	8562/54-4511-250		1xNOAux	
	8562/54-4512-250		1xNOAla	
	8562/54-4513-250		1xNCAux	
	8562/54-4514-250		1xCOAux	
	8562/54-4515-250		1xCOAla	
40A	8562/54-4517-250	3-p+N	1xNCAla	30mA
	8562/54-4510-400		none	
	8562/54-4511-400		1xNOAux	
	8562/54-4512-400		1xNOAla	
	8562/54-4513-400		1xNCAux	
	8562/54-4514-400		1xCOAux	
40A	8562/54-4515-400	3-p+N	1xCOAla	30mA
	8562/54-4517-400		1xNCAla	
	8562/54-4517-400		1xNCAla	



# 8565/1 Ground Fault Circuit Interrupter

EX GFCI SERIES 8565/11-1050 AND EX GFEP SERIES 8565/11-1300

DISTRIBUTION



1-Pole + N			
Device	Amp Rating at $T_a=25^\circ\text{C}$	Catalog Number	Ground Fault Leakage Rate
ExGFCI	15	8565/11-1050-015	5mA
	20	8565/11-1050-020	
	25	8565/11-1050-025	
	30	8565/11-1050-030	
ExGFEP	15	8565/11-1300-015	30mA
	20	8565/11-1300-020	
	30	8565/11-1300-030	



## CLASSIFICATIONS of Ex GFCIs AND Ex GFEPs

NEC & CEC

Class I, Zone 1, AEx/Ex de IIC T6 Gb  
Class I, Division 2, Groups A, B, C & D (US)  
Class I, Division 2, per CEC J18-150 (C)



File No. 3044318

Designed to:

Ex GFCI: ANSI/UL 943 & 489  
CSA C 22.2 No. 144-1 & No. 5  
Ex GFEP: ANSI/UL 1053 & 489  
CSA C 22.2 No. 144 & No. 5

Voltage: 120 Vac

Ambient Temperature:


+40°C (+104°F) Max  
-40°C (-40°F) Min

Short Circuit  
Switch Capacity -10kA symRMS  
When in circuit with properly sized current limitation device.

## FEATURES

The Ex GFCI Series, 8565/11-1050 is an explosion protected device providing personnel protection from ground faults as well as over current protection.

The Ex GFEP Series, 8565/11-1300 is an explosion protected device providing equipment protection from ground fault as well as over current protection.

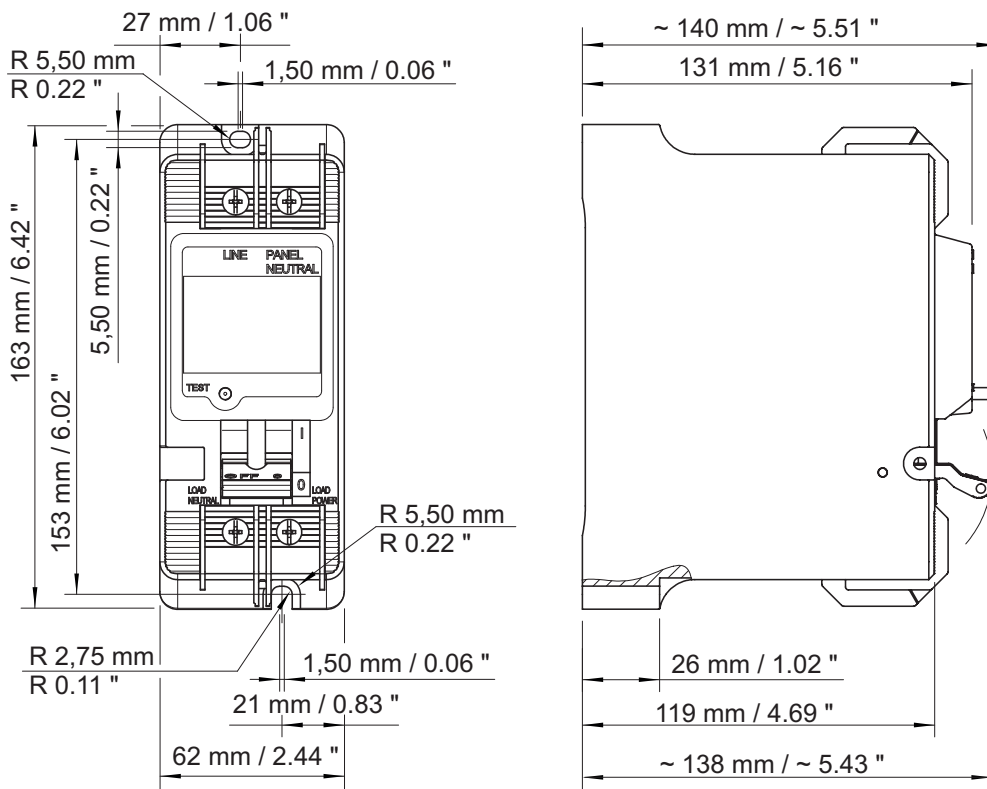


EXPLOSION PROTECTION by R. STAHL 1-800-782-4357



H12

FOR BREAKER PANELS SERIES 8146/5

1. Vertical Supports
2. Horizontal Supports
3. Bracket for Roof Attachment
  - To secure roof
  - Can be used to mount a luminaire.
  - See Catalog Section B.
4. Roof
  - For additional protection of the breaker panel from the elements.
5. Brackets
  - End piece for transportation and wall mounting. Possible on top and bottom.
6. Fixing Angle Brackets
  - For wall mounting (on left and right side)
7. Bonding terminal
8. Triangle Support
  - Free standing
  - Can be fixed to the floor
9. Material Galvanized Steel

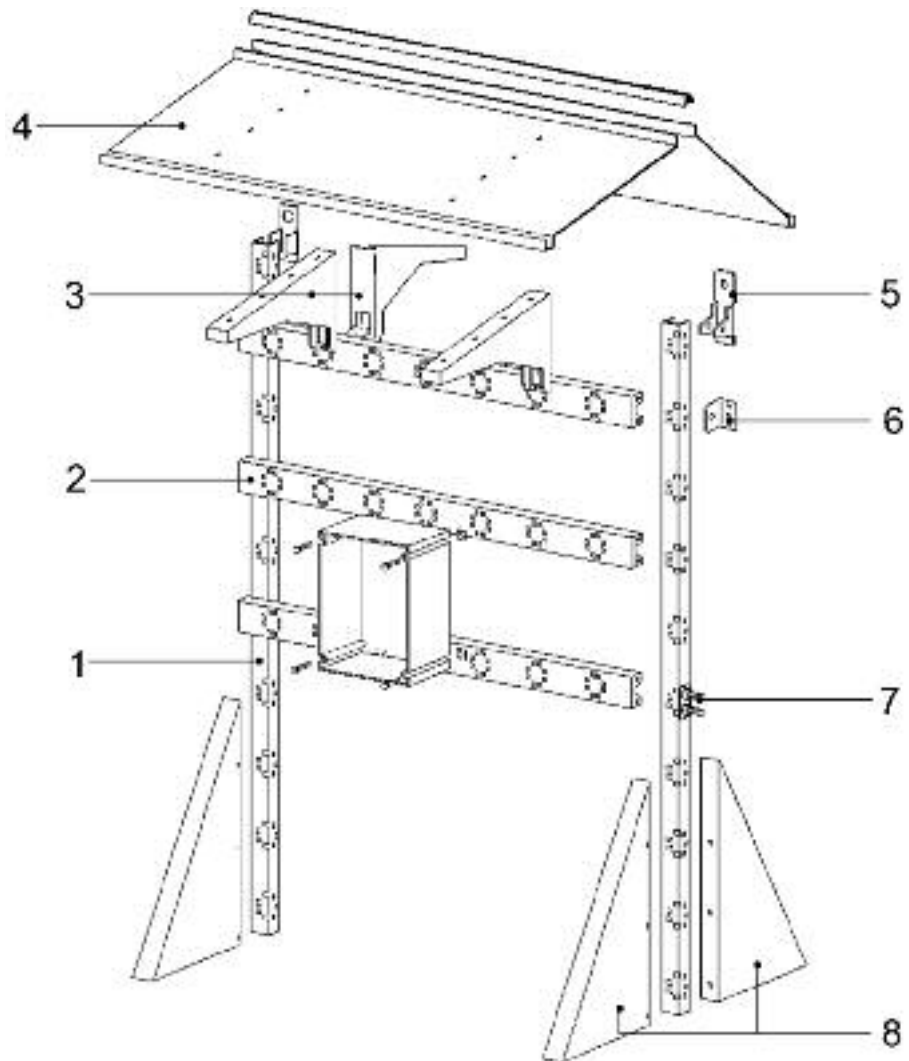

Wall Mounting Frame for Breaker Panel shown on page H5.

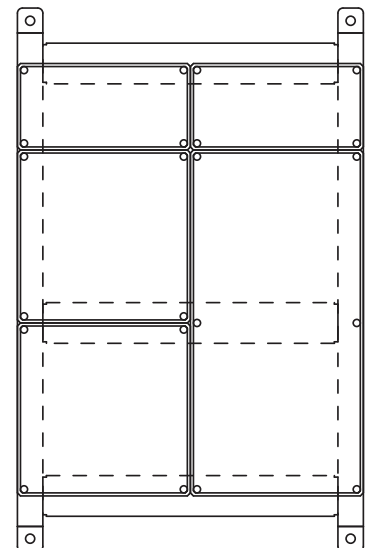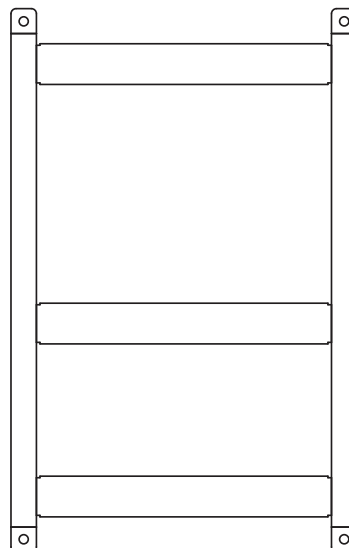

R. STAHL INC. would welcome the opportunity to quote custom designed breaker panels. Contact our engineering department with your specific requirements

STAHL


### 8265 Series of Enclosures

#### Features:

- Flexible modular design, available in four enclosure sizes.
- Available with or without glass windows.
- Mounting lugs are integrated.
- Made of Copper Free Aluminum (Marine Grade).
- Easy access to enclosure interior.
- Global Certifications.
- Compact square enclosures with threaded covers.



- Cover Gasket is standard on every assembly.



EXPLOSION PROOF & DUST IGNITION PROOF THREADED ENCLOSURES



### CLASSIFICATIONS

NEC & CEC:

Gas Explosion Protection

Class I, Division 1, Groups A,B,C, & D  
Class I, Zone 1, Groups IIC, IIB & IIA

Dust Explosion Protection

Class II, Division 1, Groups E,F, & G  
Class III

Environmental Protection

Type 3, 4, 4X, 7 & 9



FILE No. E307783

Ingress Protection IP66:

For ATEX and IEC certification please contact factory.

### APPLICATIONS

The Series 8265 of threaded enclosures are for use in hazardous (classified) locations as specified above under CLASSIFICATIONS. They are designed to contain ordinary location electrical components for Instrumentation and Motor Control. The four sizes are available with or without windows, and come either with customized, factory drilled and tapped entry openings, or they also can be field modified. (see Field Drilling/Tapping Information on Page I2).



### Ordering Information

Catalog Number	External Dimensions L x W x D	Descriptions
8265/62-0000	6.10" x 6.10" x 5.20"; (155 x 155 x 132 mm)	Empty enclosure w/o window
8265/62-0020	6.10" x 6.10" x 5.20"; (155 x 155 x 132 mm)	Empty enclosure with window
8265/63-0000	7.68" x 7.68" x 6.77"; (195 x 195 x 172 mm)	Empty enclosure w/o window
8265/63-0020	7.68" x 7.68" x 6.77"; (195 x 195 x 172 mm)	Empty enclosure with window
8265/64-0000	9.29" x 9.29" x 8.94"; (236 x 236 x 227 mm)	Empty enclosure w/o window
8265/64-0020	9.29" x 9.29" x 8.94"; (236 x 236 x 227 mm)	Empty enclosure with window
8265/66-0000	13.19" x 13.19" x 11.06" (335x335x281 mm)	Empty enclosure w/o window
8265/66-0020	13.19" x 13.19" x 11.06" (335x335x281 mm)	Empty enclosure with window

### Technical Data

DESCRIPTION	
AMBIENT TEMPERATURE	For Groups A, B, C & D } and for IIC, IIB & IIA } +50°C (+122°F) max. -25°C (-13°F) min.
	For Groups C & D } and for IIB & IIA } +50°C (+122°F) max. -50°C (-58°F) min. (8265/62 - 0000 only)
	For Groups E, F, & G } +40°C (+104°F) max. -25°C (-13°F) min.
MAX. INTERRUPTING CAPACITY OF INSTALLED COMPONENTS	10 kA RMS Symmetrical Amperes
EXTERNAL AUXILIARY DEVICES (i.e. Push Buttons or Pilot Lights)	Listed for Hazardous Locations USL (NOIV) & CNL (NOIV7)
WINDOW MATERIAL	Borosilicate Glass
ENCLOSURE MATERIAL	Copper Free Aluminum (Marine Grade)

EXPLOSION PROOF &amp; DUST IGNITION PROOF THREADED ENCLOSURES


**8265 Maximum Number of Entry Openings Per Side**

Entry Size	Enclosure 8265/62	Enclosure 8265/63	Enclosure 8265/64	Enclosure 8265/66
1/2" NPT	4	9	18	39
3/4" NPT	3	6	16	28
1" NPT	2	5	9	20
1-1/4" NPT	2	3	6	12
1-1/2" NPT	1	2	5	8
2" NPT	-	1	3	6
2-1/2" NPT	-	-	-	4
3" NPT	-	-	-	2
M10 x 1.5	3	8	16	48
M14 x 1.5	3	8	16	48
M15 x 1.5	3	8	16	48
M16 x 1.5	3	8	16	48
M20 x 1.5	3	8	16	28
M25 x 1.5	2	4	9	16
M32 x 1.5	2	3	6	11
M33 x 1.5	1	2	4	11
M36 x 1.5	1	2	4	8
M40 x 1.5	1	2	4	8
M42 x 1.5	-	1	3	8
M48 x 1.5	-	1	3	8
M50 x 1.5	-	1	3	5
M56 x 1.5	-	1	1	5
M63 x 1.5	-	1	1	3
M75 x 1.5	-	1	1	2

**Area for Conduit/Gland Openings**

Enclosure Body	Area for Conduit/Gland Openings		
	Length (A) inches (mm)	Width (B) inches (mm)	Height over mounting surface (C) inches (mm)
8265/62	3.94 (100)	1.89 (48)	0.95 (24)
8265/63	3.94 (100)	3.50 (89)	0.95 (24)
8265/64	5.51 (140)	5.35 (136)	1.02 (26)
8265/66	8.31 (211)	6.58 (167)	1.26 (32)

\*Dimension P see page I3

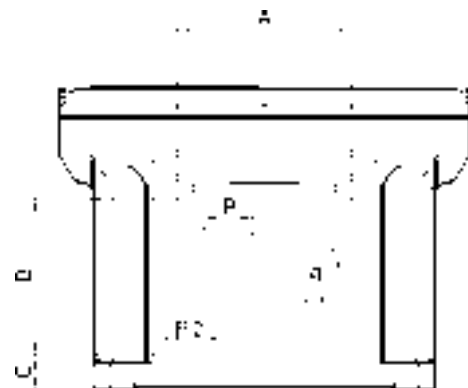

## THREADED ENCLOSURES

**Required Center-To-Center Spacing For Entry Openings**

Minimum distance "P" in inch (mm) between entries of different sizes									
Metric or NPT	M10x1.5 M14x1.5 M15x1.5 M16x1.5	M20x1.5 1/2"	M24x1.5 M25x1.5 3/4" *	M32x1.5 1"	M33x1.5 M36x1.5 M40x1.5 1-1/4" *	M42x1.5 M48x1.5 M50x1.5 1-1/2"	M56x1.5 M63x1.5 2"	M75x1.5 2-1/2"	M90x1.5 M105x1.5 3"
M10x1.5 M14x1.5 M15x1.5 M16x1.5	1.18 (30)								
M20x1.5 1/2"	1.18 (30)	1.18 (30)							
M24x1.5 M25x1.5 3/4" *	1.38 (35)	1.38 (35)	1.57 (39.9)						
M32x1.5 1"	1.49 (37.8)	1.49 (37.8)	1.68 (42.7)	1.79 (45.5)					
M33x1.5 M36x1.5 M40x1.5 1-1/4" *	1.68 (42.7)	1.68 (42.7)	1.88 (47.7)	1.99 (50.5)	2.18 (55.4)				
M42x1.5 M48x1.5 M50x1.5 1-1/2"	1.79 (45.5)	1.79 (45.5)	1.99 (50.5)	2.10 (53.3)	2.29 (58.2)	3.35 (85.1)			
M56x1.5 M63x1.5 2"	2.12 (53.8)	2.12 (53.8)	2.31 (58.8)	2.43 (61.6)	2.62 (66.5)	2.73 (69.3)	3.06 (77.6)		
M75x1.5 2-1/2"	3.38 (60.5)	3.38 (60.5)	2.58 (65.5)	2.69 (68.3)	2.88 (73.2)	2.99 (76)	3.32 (84.3)	3.58 (91)	
M90x1.5 M105x1.5 3"	2.99 (76)	2.99 (76)	3.19 (81)	3.29 (83.5)	3.53 (89.7)	3.66 (93)	4.13 (104.8)	4.37 (111)	N/A








\* NPT or NPSM

P/2 is the half distance between two entries of the same size




PARTS AND ACCESSORIES

Use only the following original spare parts and accessories, any others would invalidate the certification and warranty.

Item	Image	Description	Catalog Number
Threaded Cover w/o Window		for enclosure: 8265/62-0000 8265/63-0000 8265/64-0000 8265/66-0000	826590050023 826590050033 826590050043 826590050063
Threaded Cover with Window		for enclosure: viewable diameter of window 8265/62-0010 4.13" (105 mm) 8265/63-0010 5.55" (141 mm) 8265/64-0010 7.32" (186 mm) 8265/66-0010 7.32" (186 mm)	826500050120 826500050130 826500050140 826500050160
Mounting Plate		for enclosure 8265/62 for enclosure 8265/63 for enclosure 8265/64 for enclosure 8265/66	826590550020 826590550030 826590550040 826590550060
O-Ring		for enclosure 8265/62 for enclosure 8265/63 for enclosure 8265/64 for enclosure 8265/66	5156550 5156560 5156570 5158290
DIN Rails for line-up Terminals		TS 15 for enclosure 8265/62 TS 35 for enclosure 8265/62 TS 15 for enclosure 8265/63 TS 35 for enclosure 8265/63 G 32 for enclosure 8265/63 TS 15 for enclosure 8265/64 TS 35 for enclosure 8265/64 G 32 for enclosure 8265/64 TS 15 for enclosure 8265/66 TS 35 for enclosure 8265/66 G 32 for enclosure 8265/66	826590980010 826590980020 8146942980 8146954980 8146949980 8146943980 8146955980 8146950980 826590980030 826590980040 826590980050
Set Screw		M5 x 16-A2 - Allen screw with point to secure the cover	5036760
Handle		to turn the enclosure cover (for sizes 2, 3 & 4) (2 required to open enclosure)	8225001160
Handle		to open the enclosure cover (for size 6) (2 required to open enclosure)	3706090




THREADED ENCLOSURE DIMENSIONS

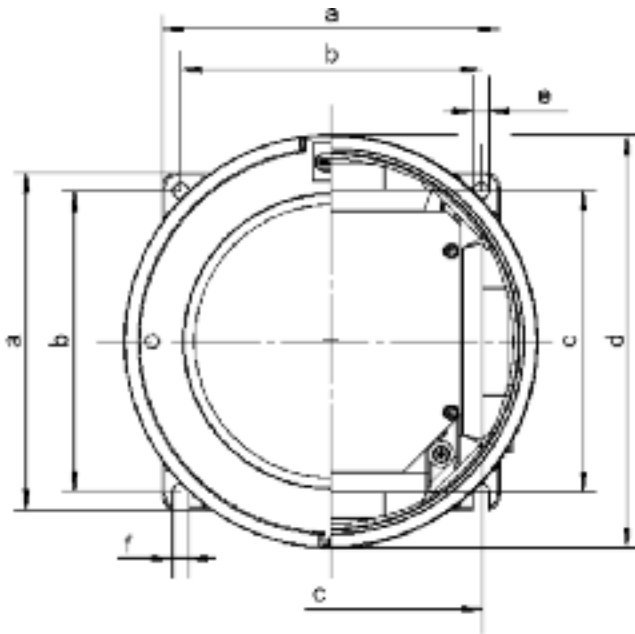

Enclosure 8265/6.-0000,  
without window

Usable Internal Dimensions: c x c x i

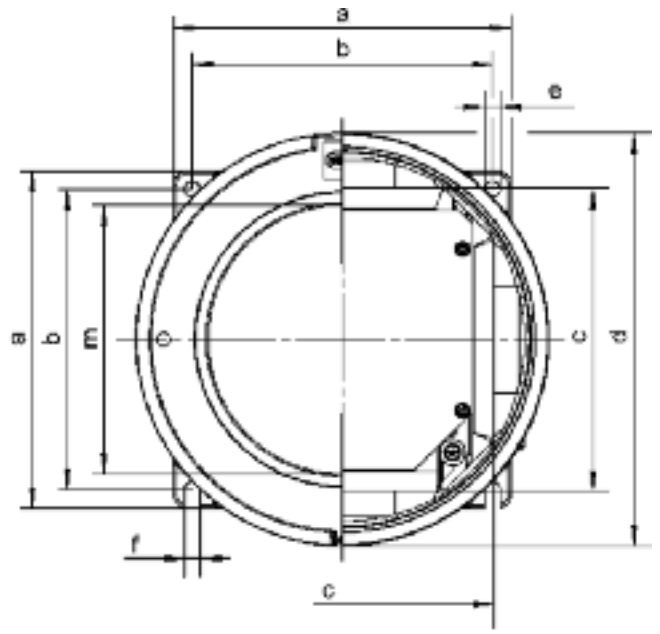

Enclosure 8265/6.-0010,  
with window

Usable Internal Dimensions: c x c x n

Dimensions in inches (mm)														
Type	a	b	c	d	e	f	g	h	i	j	k	l	m	n
8265/62	6.10 (155)	5.51 (140)	5.16 (131)	7.56 (192)	0.28 (7)	0.28 (7)	5.20 (132)	3.05 (77.5)	3.66 (93)	0.47 (12)	0.51 (13)	0.45 (11.5)	4.13 (105)	3.25 (82.5)
8265/63	7.68 (195)	6.77 (172)	6.73 (171)	9.21 (234)	0.35 (9)	0.35 (9)	6.77 (172)	4.62 (117.5)	5.24 (133)	0.51 (13)	0.51 (13)	0.61 (15.5)	5.55 (141)	4.82 (122.5)
8265/64	9.29 (236)	8.27 (210)	8.35 (212)	11.38 (289)	0.43 (11)	0.43 (11)	8.94 (227)	6.63 (168.5)	7.26 (184.5)	0.51 (13)	0.51 (13)	0.61 (15.5)	7.32 (186)	6.83 (173.5)
8265/66	13.2 (335)	12.3 (312)	11.8 (300)	16.1 (410)	0.45 (11.5)	0.45 (11.5)	11 (281)	8.12 (206.5)	9 (229.5)	0.71 (18)	0.69 (17.5)	0.61 (15.5)	7.32 (186)	8.6 (218.5)



### 8264 Series of Enclosures Made of Aluminum or Stainless Steel

#### Features:

- *Copper Free Aluminum – High strength, light weight and corrosion resistant.*
- *Stainless Steel – Best material solution for challenging environmental conditions.*
- *Gasketed Flange – “O” ring gasket is located inside the cover bolts.*
- *Flat Cover – Provides space for operator installation.*
- *Rectangular or Round Windows – Can be factory installed to enable viewing of digital read out meters and other devices.*
- *Conduit Openings – Enclosures are designed with a wall thickness suitable for drilling and tapping of conduit openings up to 2" max.*
- *Stainless Steel Hinges – All enclosures are provided with factory installed hinges which allow easy access for inspection, maintenance and system changes.*
- *Mounting Rails – Standard.*
- *Internal Mounting Plate Bosses – They are factory machined to enable field installation of the optional mounting plates.*
- *Optional Finish – Powder Coating.*

EXPLOSION PROOF & DUST IGNITION PROOF ENCLOSURES

### CLASSIFICATIONS

**NEC & CEC:**  
 Gas Explosion Protection  
 Class I, Division 1, Groups B, C & D  
 Class I, Zone 1, Groups IIA, IIB & IIB+H<sub>2</sub>

Dust Explosion Protection  
 Class II, Division 1 Groups E, F & G  
 Class III

Environmental Protection  
 Type 3, 4, 4X, 7, 9



For IEC certification please contact factory.

- II 2G Ex d IIB + H2
- II 2D Ex tD A21 IP66
- KEMA01ATEX2145U

**IECEX**  
 Ex d IIB +H2  
 Ex tD A21 IP66  
 IECEX KEM 07.0050 U

**Enclosure Materials**  
 8264/6\*\*\*-3 Copper Free Aluminum  
 (Marine Grade)  
 8264/6\*\*\*-2 Stainless Steel 316L

**Ambient Temperature**  
 +50°C (122°F) max.  
 -25°C (-13°F) min.

### APPLICATIONS

The Series 8264 are Explosion Proof and Dust Ignition Proof enclosures made of Copper Free Aluminum or Stainless Steel 316L. They are suitable for use in hazardous (classified) locations as specified above.

They are designed to contain ordinary location electrical components for Instrumentation, Motor Control and Distribution. There are eight sizes of enclosures and they all come with Stainless Steel cover hinges and mounting rails as standard. Mounting Plates are optional and need to be ordered separately.

They can be customized with drilled and tapped entry openings as well as round and rectangular windows and operators.

Entry and operator openings can be field modified. For details regarding Aluminum Enclosures see pages I9 and I10. For Stainless Steel Enclosures see pages I11 and I12.



### Ordering Information For Empty Aluminum Enclosures

with Stainless Steel cover hinges and mounting rails.

Catalog Number	External Dimensions L x W x D
8264/6114-3	9.25" x 9.25" x 10.24"; (235 x 235 x 260 mm)
8264/6214-3	14.17" x 9.25" x 10.24"; (360 x 235 x 260 mm)
8264/6224-3	14.17" x 14.17" x 10.24"; (360 x 360 x 260 mm)
8264/6225-3	14.17" x 14.17" x 12.99"; (360 x 360 x 330 mm)
8264/6325-3	18.90" x 14.17" x 12.99"; (480 x 360 x 330 mm)
8264/6335-3	18.90" x 18.90" x 12.99"; (480 x 480 x 330 mm)
8264/6935-3	28.74" x 18.90" x 12.99"; (730 x 480 x 330 mm)
8264/6995-3	28.74" x 28.74" x 12.99"; (730 x 730 x 330 mm)

### Ordering Information For Empty Stainless Steel Enclosures

with Stainless Steel cover hinges and mounting rails.

Catalog Number	External Dimensions L x W x D
8264/6112-2	9.25" x 9.25" x 10.63"; (235 x 235 x 270 mm)
8264/6212-2	14.17" x 9.25" x 10.63"; (360 x 235 x 270 mm)
8264/6222-2	14.17" x 14.17" x 10.63"; (360 x 360 x 270 mm)
8264/6223-2	14.17" x 14.17" x 13.39"; (360 x 360 x 340 mm)
8264/6323-2	18.90" x 14.17" x 13.39"; (480 x 360 x 340 mm)
8264/6333-2	18.90" x 18.90" x 13.39"; (480 x 480 x 340 mm)
8264/6933-2	28.74" x 18.90" x 13.39"; (730 x 480 x 340 mm)
8264/6993-2	28.74" x 28.74" x 13.39"; (730 x 730 x 340 mm)


### Mounting Plates

Item	Image	Description	Catalog Number
Optional Mounting Plates for Aluminum or Stainless Steel Enclosures		enclosure sizes: 8264/611•• 8264/621•• 8264/622•• 8264/632•• 8264/633•• 8264/693•• 8264/699••	82 649 07 55 0 82 649 08 55 0 82 649 01 55 0 82 649 02 55 0 82 649 03 55 0 82 649 04 55 0 82 649 05 55 0
Fixing Screw Kit			82 648 01 90 6

### Technical Data

DESCRIPTION	
<b>MAX. INTERRUPTING CAPACITY OF INSTALLED COMPONENTS</b>	10 kA RMS Symmetrical Amperes
<b>EXTERNAL AUXILIARY DEVICES (i.e. Push Buttons or Pilot Lights)</b>	Listed for Hazardous Locations USL (NOIV) & CNL (NOIV7)
<b>WINDOW MATERIAL</b>	Borosilicate Glass
<b>ENCLOSURE MATERIAL</b>	Copper Free Aluminum (Marine Grade) or Stainless Steel 316L

ENCLOSURE DIMENSIONS

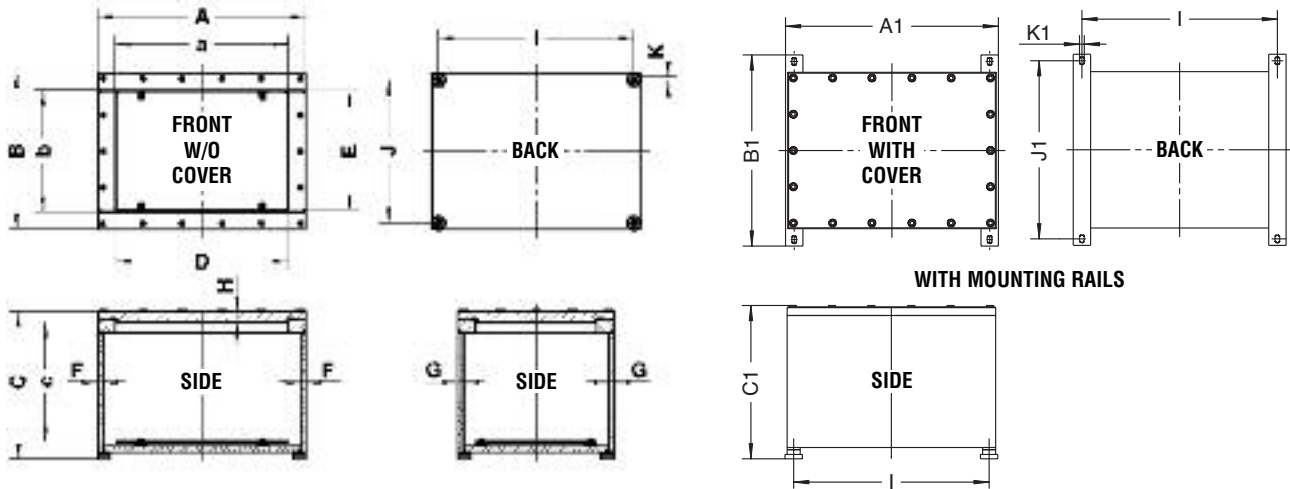


8264/6...-3 Aluminum Enclosure Dimensions in inches (mm)																			
Enclosure Type	External						Mounting Plate		Internal						Mounting				
	A	A1	B	B1	C	C1	D	E	a	b	c*	F	G	H	I	J	J1	K	K1
8264/6114-3	9.25 (235)	11.22 (285)	9.25 (235)	13.86 (352)	10.24 (260)	10.71 (272)	5.98 (152)	5.98 (152)	6.18 (157)	6.18 (157)	7.95 (202)	0.47 (12)	0.47 (12)	0.98 (25)	8.07 (205)	8.07 (205)	11.89 (302)	Standard Thread Size – M12 – 0.98 (25) deep (for optional thread sizes, please contact factory)	Width of elongated hole = 0.70 (18)
8264/6214-3	14.17 (360)	11.22 (285)	9.25 (235)	13.86 (352)	10.24 (260)	10.71 (272)	10.79 (274)	5.98 (152)	11.02 (282)	6.10 (157)	7.95 (202)	0.47 (12)	0.65 (16.5)	0.98 (25)	12.99 (330)	8.07 (205)	11.89 (302)		
8264/6224-3	14.17 (360)	16.14 (410)	14.17 (360)	18.74 (476)	10.24 (260)	10.71 (272)	10.79 (274)	10.79 (274)	11.02 (282)	11.02 (282)	7.95 (202)	0.65 (16.5)	0.65 (16.5)	0.98 (25)	12.99 (330)	12.99 (330)	16.77 (426)		
8264/6225-3	14.17 (360)	16.14 (410)	14.17 (360)	18.74 (476)	12.99 (330)	13.46 (342)	10.79 (274)	10.79 (274)	11.02 (282)	11.02 (282)	10.83 (272)	0.65 (16.5)	0.65 (16.5)	0.98 (25)	12.99 (330)	12.99 (330)	16.77 (426)		
8264/6325-3	18.90 (480)	16.14 (410)	14.17 (360)	18.74 (476)	12.99 (330)	13.46 (342)	15.51 (394)	10.79 (274)	15.83 (402)	11.02 (282)	10.24 (260)	0.65 (16.5)	0.65 (16.5)	1.01 (25.6)	17.72 (450)	12.99 (330)	16.77 (426)		
8264/6335-3	18.90 (480)	21.26 (540)	18.90 (480)	23.23 (590)	12.99 (330)	13.46 (342)	15.51 (394)	15.51 (394)	15.83 (402)	15.83 (402)	10.16 (258)	0.65 (16.5)	0.65 (16.5)	1.00** (25.4)	17.72 (450)	17.72 (450)	21.50 (546)		
8264/6935-3	28.74 (730)	31.10 (790)	18.90 (480)	23.23 (590)	12.99 (330)	13.46 (342)	24.80 (644)	15.51 (394)	25.59 (652)	15.83 (402)	8.66 (242)	0.65 (16.5)	0.85 (21.5)	1.58 (40.3)	27.56 (700)	17.72 (450)	21.50 (546)		
8264/6995-3	28.74 (730)	31.10 (790)	28.74 (730)	33.31 (846)	12.99 (330)	13.46 (342)	24.80 (630)	24.80 (630)	25.20 (640)	25.20 (640)	9.84 (238)	0.85 (21.5)	0.85 (21.5)	1.58 (40.3)	27.56 (700)	27.56 (700)	31.34 (796)		

\* For covers with windows: c = c – 0.88 (20) \*\* For covers with windows: H = 1.59 (40.3) and c = c – 1.38 (35)

8264/6...-2 Stainless Steel Enclosure Dimensions in inches (mm)																			
Enclosure Type	External						Mounting Plate		Internal						Mounting				
	A	A1	B	B1	C	C1	D	E	a	b	c*	F	G	H	I	J	J1	K	K1
8264/6112-2	9.25 (235)	11.22 (285)	9.25 (235)	13.86 (352)	10.63 (270)	11.10 (282)	5.98 (152)	5.98 (152)	6.10 (155)	6.10 (155)	8.07 (207)	0.47 (12)	0.47 (12)	0.98 (25)	8.07 (205)	8.07 (205)	11.89 (302)	Standard Thread Size – M12 – 0.98 (25) deep (for optional thread sizes, please contact factory)	Width of elongated hole = 0.70 (18)
8264/6212-2	14.17 (360)	11.22 (285)	9.25 (235)	13.86 (352)	10.63 (270)	11.10 (282)	10.79 (274)	5.98 (152)	11.02 (280)	6.10 (155)	8.07 (207)	0.47 (12)	0.47 (12)	0.98 (25)	12.99 (330)	8.07 (205)	11.89 (302)		
8264/6222-2	14.17 (360)	16.14 (410)	14.17 (360)	18.74 (476)	10.63 (270)	11.10 (282)	10.79 (274)	10.79 (274)	11.02 (280)	11.02 (280)	8.07 (204)	0.47 (12)	0.47 (12)	0.98 (25)	12.99 (330)	12.99 (330)	16.77 (426)		
8264/6223-2	14.17 (360)	16.14 (410)	14.17 (360)	18.74 (476)	13.39 (340)	13.86 (352)	10.79 (274)	10.79 (274)	11.02 (280)	11.02 (280)	10.83 (274)	0.47 (12)	0.47 (12)	0.98 (25)	12.99 (330)	12.99 (330)	16.77 (426)		
8264/6323-2	18.90 (480)	16.14 (410)	14.17 (360)	18.74 (476)	13.39 (340)	13.86 (352)	15.51 (394)	10.79 (274)	15.75 (400)	11.02 (280)	10.83 (274)	0.47 (12)	0.47 (12)	0.98 (25)	17.72 (450)	12.99 (330)	16.77 (426)		
8264/6333-2	18.90 (480)	21.26 (540)	18.90 (480)	23.23 (590)	13.39 (340)	14.57 (370)	15.51 (394)	15.51 (394)	15.75 (400)	15.75 (400)	10.63 (269)	0.47 (12)	0.47 (12)	0.99 (25.2)	17.72 (450)	17.72 (450)	21.50 (546)		
8264/6933-2	28.74 (730)	31.10 (790)	18.90 (480)	23.23 (590)	13.39 (340)	14.57 (370)	24.80 (644)	15.51 (394)	25.59 (650)	15.75 (400)	10.83 (273)	0.47 (12)	0.47 (12)	0.98 (25)	27.56 (700)	17.72 (450)	21.50 (546)		
8264/6993-2	28.74 (730)	31.10 (790)	28.74 (730)	33.31 (846)	13.39 (340)	14.57 (370)	24.80 (630)	24.80 (630)	25.59 (650)	25.59 (650)	10.63 (268)	0.47 (12)	0.47 (12)	0.98 (25)	27.56 (700)	27.56 (700)	31.34 (796)		

\* For covers with windows: c = c – 0.88 (20)

**Cover – Aluminum, Area for Operator Installation.**

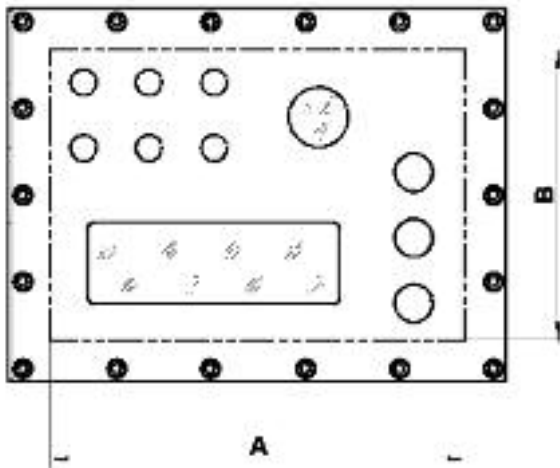

<b>8264/6...-3 Aluminum Enclosure Cover - Area for Operator Installation in inches (mm)</b>			
Cover for Enclosure Type	Length	Width	Max. Number of Operators
	A	B	3/4"-14 NPSM*
8264/6114-3	5.43 (138)	5.43 (138)	4
8264/6214-3	10.24 (260)	5.43 (138)	8
8264/6224-3	10.24 (260)	10.24 (260)	16
8264/6225-3	10.24 (260)	10.24 (260)	16
8264/6325-3	14.96 (380)	10.24 (260)	24
8264/6335-3	14.96 (380)	14.96 (380)	36
8264/6935-3	24.80 (630)	14.96 (380)	54
8264/6995-3	24.80 (630)	24.80 (630)	81


\* Optional metric thread sizes can be used: M16 x 1.5; M20 x 1.5; M25 x 1.5.

<b>8264/6...-3 Aluminum Enclosure Cover - Maximum Number of Windows and Sizes</b>								
Cover for Enclosure Type	Round / Viewing Diameter in inches (mm)				Rectangular / Viewing Area in inches (mm)			
	2.17 (55)	2.56 (65)	3.54 (90)	5.51 (140)	2.28 x 5.59 (58 x 142)	3.86 x 5.59 (98 x 142)	5.63 x 9.21 (143 x 234)	7.87 x 11.81 (200 x 300)
8264/6114-3	1	N/A	N/A	N/A	N/A	N/A	N/A	N/A
8264/6214-3	1	N/A	N/A	N/A	1	N/A	N/A	N/A
8264/6224-3	1	1	1	1	1	1	N/A	N/A
8264/6225-3	1	1	1	1	1	1	N/A	N/A
8264/6325-3	2	2	2	1	2	1	1	1
8264/6335-3	4	4	4	1	2	2	1	1
8264/6935-3	6	4	2	1	1	1	N/A	N/A
8264/6995-3	6	4	2	1	1	1	N/A	N/A

For combinations of operators and windows together, please consult factory.

EXPLOSION PROOF & DUST IGNITION PROOF ENCLOSURES

**Body – Aluminum, Area for Entry Installation.**

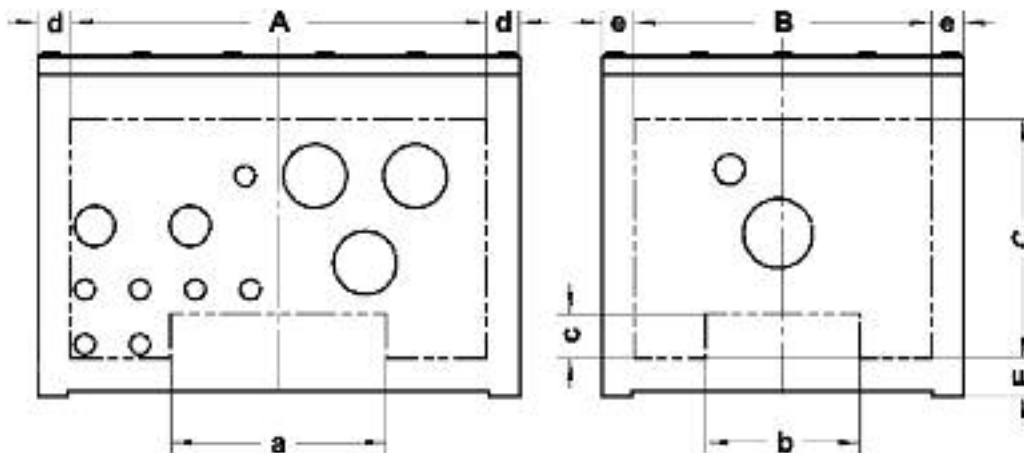

8264/6...-3 Aluminum Enclosure Body – Area for Entry Installation in inches (mm)									
Enclosure Type	Width		Height	Height over Mounting	Section of internal reinforcements			Distance to Side Wall	
	A	B	C	E	a	b	c	d	e
8264/6114-3	7.48 (190)	7.48 (190)	6.38 (162)	1.34 (34)	–	–	–	0.89 (22.5)	0.89 (22.5)
8264/6214-3	12.44 (316)	7.17 (182)	6.38 (162)	1.34 (34)	–	–	–	0.87 (22)	1.04 (26.5)
8264/6224-3	11.97 (304)	11.97 (304)	6.38 (162)	1.34 (34)	–	–	–	1.10 (28)	1.10 (28)
8264/6225-3	11.34 (288)	11.34 (288)	9.13 (232)	1.34 (34)	–	–	–	1.42 (36)	1.42 (36)
8264/6325-3	16.14 (410)	11.41 (290)	8.27 (210)	1.77 (45)	9.06 (230)	4.72 (120)	1.97 (50)	1.38 (35)	1.38 (35)
8264/6335-3	16.54 (420)	16.54 (420)	6.46 (164)	3.62 (92)	–	–	–	1.18 (30)	1.18 (30)
8264/6935-3	25.59 (650)	15.4 (390)	5.83 (148)	3.62 (92)	–	–	–	1.57 (40)	1.77 (45)
8264/6995-3	25.59 (650)	25.59 (650)	6.22 (158)	3.23 (82)	6.30 (160)	6.30 (160)	2.44 (62)	1.57 (40)	1.57 (40)

For minimum distance between entries contact factory. For maximum numbers of Entries see table below.


8264/6...-3 Aluminum Enclosure Body - Maximum Number of Entries per Side Wall and in Total for all Sides																
Enclosure Type	Wall Side	Entry Sizes														
		M16 x 1.5		1/2"-NPT or M20 x 1.5		3/4"-NPT* or M25 x 1.5		1"-NPT or M32 x 1.5		1-1/4"-NPT or M40 x 1.5		1-1/2"-NPT or M50 x 1.5		2"-NPT or M63 x 1.5		
		per side	max. total	per side	max. total	per side	max. total	per max.	max. total	per side	max. total	per side	max. total	per side	max. total	
8264/6114-3	all sides	20	80	20	59	14	37	9	24	6	15	4	10	2	6	
8264/6214-3	short side	18	102	18	73	14	45	9	29	6	18	4	13	2	8	
	long side	33		33		22		15		8		6		4		
8264/6224-3	all sides	33	132	33	87	22	54	15	35	8	21	6	15	4	9	
8264/6225-3	all sides	42	152	42	87	25	54	14	35	9	21	5	15	3	9	
8264/6325-3	short side	32	152	32	96	19	60	10	38	6	24	5	17	3	10	
	long side	44		44		25		14		8		6		4		
8264/6335-3	all sides	40	138	40	79	24	49	12	31	8	19	5	14	3	8	
8264/6935-3	short side	36	192	36	119	21	74	10	47	8	30	4	21	3	13	
	long side	60		60		36		18		14		7		5		
8264/6995-3	all sides	54	216	54	159	32	99	15	60	13	40	7	28	5	17	

For combinations of operators and windows together, please consult factory.

\* Optional thread size 3/4" - 14 NPSM permitted.



**Cover – Stainless Steel, Area for Operator Installation.**

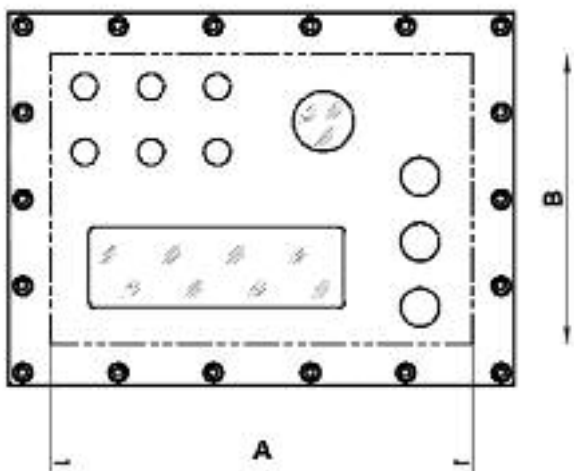

<b>8264/6...-2 Stainless Steel Enclosure Cover - Area for Operator Installation in inches (mm)</b>			
Cover for Enclosure Type	Length	Width	Max. Number of Operators 3/4"-14 NPSM*
	A	B	
8264/6112-2	5.43 (138)	5.43 (138)	4
8264/6212-2	10.24 (260)	5.43 (138)	8
8264/6222-2	10.24 (260)	10.24 (260)	16
8264/6223-2	10.24 (260)	10.24 (260)	16
8264/6323-2	14.96 (380)	10.24 (260)	24
8264/6333-2	14.96 (380)	14.96 (380)	36
8264/6933-2	24.80 (630)	14.96 (380)	54
8264/6993-2	24.80 (630)	24.80 (630)	81


\* Optional metric thread sizes can be used: M16 x 1.5; M20 x 1.5; M25 x 1.5

<b>8264/6...-2 Stainless Steel Enclosure Cover - Maximum Number of Windows and Sizes</b>									
Cover for Enclosure Type	Round / Viewing Diameter in inches (mm)				Rectangular / Viewing Area in inches (mm)				
	2.17 (55)	2.56 (65)	3.54 (90)	5.51 (140)	2.28 x 5.59 (58 x 142)	3.86 x 5.59 (98 x 142)	5.63 x 9.21 (143 x 234)	7.87 x 11.81 (200 x 300)	9.21 x 12.52 (234 x 318)
8264/6112-2	1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
8264/6212-2	1	N/A	N/A	N/A	1	N/A	N/A	N/A	N/A
8264/6222-2	1	1	1	1	1	1	N/A	N/A	N/A
8264/6223-2	1	1	1	1	1	1	N/A	N/A	N/A
8264/6323-2	2	2	2	1	2	1	1	1	N/A
8264/6333-2	4	4	4	1	2	2	1	1	N/A
8264/6933-2	6	4	2	1	1	1	1	1	1
8264/6993-2*	6	4	2	1	1	1	1	1	1

For combinations of operators and windows together, please consult factory.

EXPLOSION PROOF & DUST IGNITION PROOF ENCLOSURES

**Body – Stainless Steel, Area for Entry Installation.**

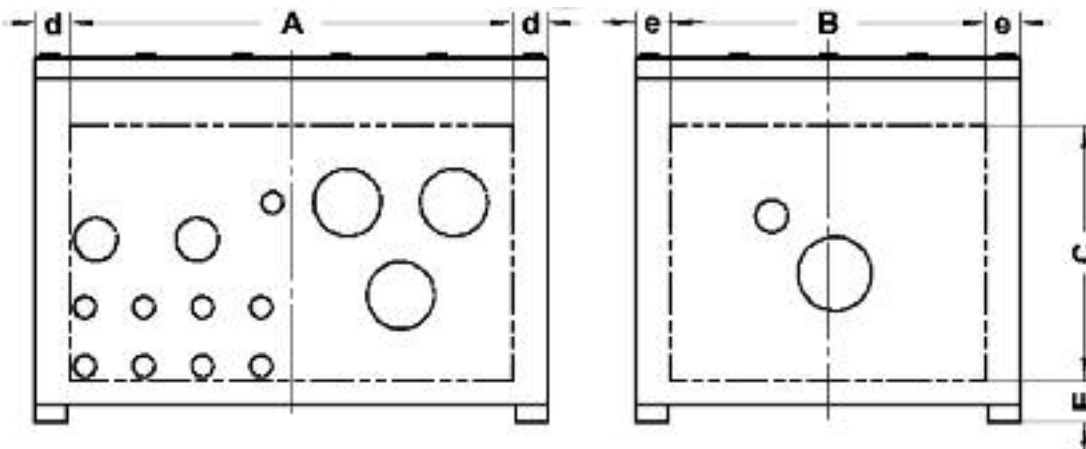

8264/6...-2 Stainless Steel Enclosure Body – Area for Entry Installation in inches (mm)						
Enclosure Type	Width		Height	Height over Mounting	Distance to Side Wall	
	A	B	C	E	d	e
8264/6112-2	7.09 (180)	7.09 (180)	6.61 (168)	1.65 (42)	1.08 (27.5)	1.08 (27.5)
8264/6212-2	12.05 (306)	7.09 (180)	6.61 (168)	1.65 (42)	1.06 (27)	1.08 (27.5)
8264/6222-2	12.05 (306)	12.05 (306)	6.50 (165)	1.77 (45)	1.06 (27)	1.06 (27)
8264/6223-2	12.05 (306)	12.05 (306)	9.25 (235)	1.77 (45)	1.06 (27)	1.06 (27)
8264/6323-2	17.32 (440)	12.05 (306)	9.25 (235)	1.77 (45)	0.79 (20)	1.06 (27)
8264/6333-2	16.77 (426)	16.77 (426)	9.06 (230)	1.97 (50)	1.06 (27)	1.06 (27)
8264/6933-2	27.17 (690)	16.77 (426)	9.25 (235)	1.77 (45)	0.79 (20)	1.06 (27)
8264/6993-2	26.61 (676)	26.61 (676)	9.06 (230)	1.97 (50)	1.06 (27)	1.06 (27)

For minimum distance between entries contact factory. For maximum numbers of Entries see table below.

8264/6...-2 Stainless Steel Enclosure Body - Maximum Number of Entries per Side Wall and in Total for all Sides															
Enclosure Type	Wall Side	Entry Size													
		M16 x 1.5		1/2"-NPT or M20 x 1.5		3/4"-NPT* or M25 x 1.5		1"-NPT or M32 x 1.5		1-1/4"-NPT or M40 x 1.5		1-1/2"-NPT or M50 x 1.5		2"-NPT or M63 x 1.5	
		per side	max. total	per side	max. total	per side	max. total	per max.	max. total	per side	max. total	per side	max. total	per side	max. total
8264/6112-2	all sides	20	80	20	59	12	37	9	24	5	15	4	10	2	6
8264/6212-2	short side	20	110	20	77	12	48	9	31	5	19	4	13	2	8
	long side	35		35		22		15		8		6		4	
8264/6222-2	all sides	35	140	35	95	22	59	15	38	8	24	6	17	4	10
8264/6223-2	all sides	42	168	42	142	28	89	16	57	8	32	6	24	4	15
8264/6323-2	short side	42	204	42	185	28	115	16	74	8	44	6	28	4	20
	long side	60		60		38		22		14		8		6	
8264/6333-2	all sides	60	240	60	221	38	138	22	88	12	48	8	32	5	20
8264/6933-2	short side	60	312	60	293	38	183	22	116	12	66	8	40	6	28
	long side	96		96		60		36		21		12		8	
8264/6993-2	all sides	96	384	96	359	60	224	36	144	21	84	12	48	8	32

For combinations of operators and windows together, please consult factory.

\* Optional thread size 3/4" - 14 NPSM permitted.



Lined area for notes, consisting of multiple horizontal lines.

STAHL

### Conduit Hubs:

- For connecting conduit.
- Sizes 1/2"-3" NPT.
- For Hazardous (classified) Locations.
- Material Zinc.

### Cable Glands:

- For connecting all types of cables.
- Sizes 1/2"-4" NPT.
- For Wet and Hazardous (classified) Locations.
- Several gland materials available.

### Breather:

- For ventilation.
- Explosion protection "increased safety".





**CLASSIFICATIONS**

NEC- Class I, Zone 1, AEx e II  
 Class I, Division 2  
 Class II, Division 2, Groups F & G  
 Class III  
 CEC- Ex e II  
 Class I, Division 2  
 Class II, Division 2, Groups F & G  
 Class III  
 Environmental Protection  
 Types 3, 4 and 4X; IP66



File No. 200949

II 2 G Ex e II  
 II 2 D Ex tD A21 IP66  
 PTB 00 ATEX 1114U

IECEx  
 Ex e II  
 Ex tD A21 IP66  
 IECEx PTB 06.0095 U

Ambient Temperature Range  
 +100°C (+212°F) Max.  
 -30°C (-22°F) Min.


Grounding Terminal Capacity:  
 One or two copper wires,  
 14 to 8 AWG, solid or stranded

**FEATURES**

The 8166/11 Series of Conduit Hubs are listed for hazardous (classified) locations as specified above and are suitable for installation of rigid conduits with 1/2" - 3" NPT threads to metallic and non-metallic enclosures with appropriate ratings. They also provide a sure watertight seal by means of an embedded "O" Ring.


They are made of zinc and are provided with a protective, insulated throat. The grounding locknut provides an "increased safety" terminal which prevents the ground wire from rotating when tightening. The locknut also has a set screw which after tightening provides firm metal-to-metal connection between the HUB body and the locknut.

**Hazardous Location Conduit Hubs with "Increased Safety" Grounding Terminal**  
**Ordering Information**

	Size NPT	Catalog Number	(H) Enclosure Thru Hole I.D.
	1/2"	<b>8166/11-01-NE</b>	7/8"
3/4"	<b>8166/11-02-NE</b>	1-1/8"	
1"	<b>8166/11-03-NE</b>	1-3/8"	
1-1/4"	<b>8166/11-04-NE</b>	1-3/4"	
1-1/2"	<b>8166/11-05-NE</b>	2"	
2"	<b>8166/11-06-NE</b>	2-1/2"	
2-1/2"	<b>8166/11-07-NE</b>	3"	
3"	<b>8166/11-08-NE</b>	3-5/8"	

**Dimensions in Inches**

Hub with "e" grounding nut	A	B (O.D.)	C	D (ID)		E (O.D.)	F	G
				(min.)	(max.)			
<b>8166/11-01-NE</b>	1.31	1.54	0.73	0.56	0.65	1.54	0.34	0.71
<b>8166/11-02-NE</b>	1.37	1.73	0.78	0.79	0.85	1.73	0.39	0.71
<b>8166/11-03-NE</b>	1.59	2.04	0.90	1.01	1.08	2.04	0.46	0.89
<b>8166/11-04-NE</b>	1.59	2.42	0.90	1.32	1.41	2.42	0.46	0.89
<b>8166/11-05-NE</b>	1.59	2.79	0.90	1.54	1.65	2.79	0.46	0.89
<b>8166/11-06-NE</b>	1.59	3.29	0.90	1.98	2.10	3.29	0.46	0.89
<b>8166/11-07-NE</b>	2.47	3.70	1.56	2.44	2.49	3.70	0.56	0.98
<b>8166/11-08-NE</b>	2.47	4.39	1.56	3.05	3.10	4.39	0.56	0.98

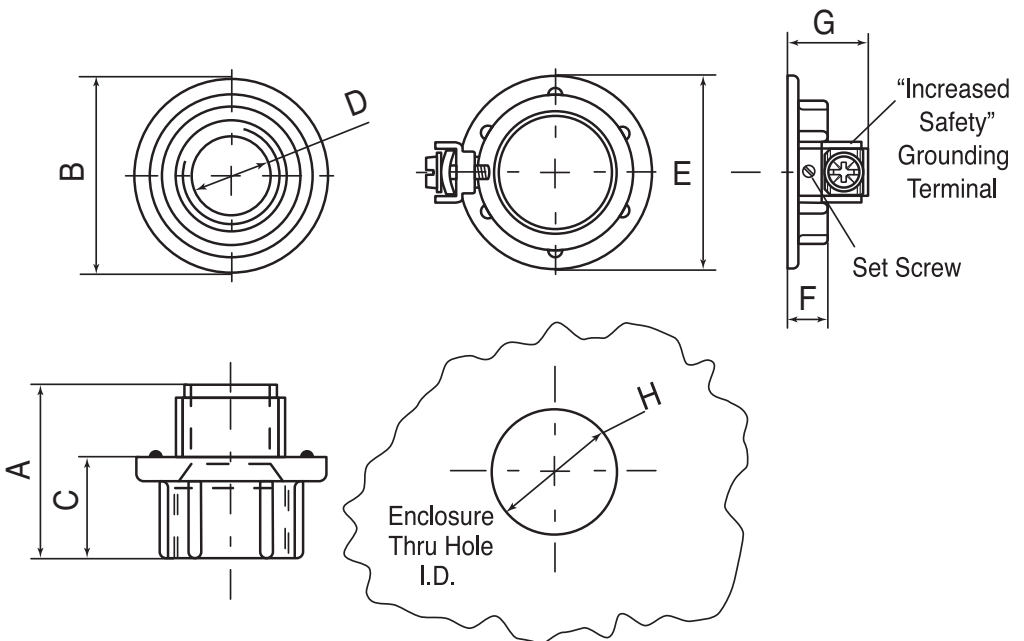

# 8162/9 Series Breather

## ACCESSORIES



### CLASSIFICATIONS

NEC- Class I, Zones 1 & 2 AEx e II  
Class I, Division 2



LISTED - File No. E200949




File No. 3000248

Material: Nylon  
Ingress Protection  
IP54, Type 3R  
when installed in enclosures  
of the same rating



### Ordering Information

DESCRIPTION		CATALOG NUMBER
Breather 8162/9	1 piece	81 620 03 01 0
Thread 3/4" NPT	100 pieces	81 620 05 02 0

### Parts

DESCRIPTION	DESIGNATION	CATALOG NUMBER
Felt Washer	 Polyamide 20 piece	81 628 01 52 0

### Dimensions

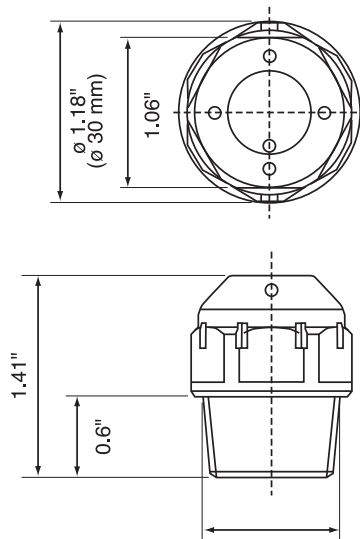

Temperature-dependent pressure differences between the interior of an enclosure (P1) and the external atmosphere (P2) are reliably equalized by means of the breather. Condensation build-up in the enclosure is thus kept to a minimum.

### Application

The breather is designed for ventilation where there is the possibility of moisture or condensation being trapped within an enclosure.

### Features:

The breather is suitable for installation in 3/4" conduit hubs or drilled and tapped conduit openings of general purpose or increased safety enclosures. They must be protected from severe impact. The felt insert is replaceable.



## C2KX Cable Glands

FOR WET & HAZARDOUS LOCATIONS

### CLASSIFICATIONS

NEC- Class I, Zone 1, AEx e II  
Class I, Div. 2, Groups A,B,C & D  
**NOTE:** When installed in compliance with the NEC.

Types 4X; IP66, IP67 & IP68

**NOTE:** For IP67 and IP68 requirements the cable diameter "B" (minimum value) shown in table should be increased by 1.0 mm to ensure compliance.

### ATEX

SIRA 06 ATEX 1097X  
SIRA 07 ATEX 4326X  
II 2G Ex e II  
II 3G Ex nR II  
II 2D Ex tD A21 IP66

### IECEX

IECEX SIR 06.0042X  
Ex e II  
Ex nR II  
Ex tD A21 IP66

Certificate No. 2367109

### MARINE APPROVALS

Lloyds Approval No.: 01/00171  
Gost K Cert. No.: KZ7500361.01.01.14761  
RoK Approval No.: 08-06/7693  
DNV Approval No.: E-10496  
ABS Approval No.: 01-LD234401A/2-PDA  
Ingress Prot. Doc.: 5046 C549G  
Deluge Prot. Compliance: DTS01 : 91  
Deluge Prot. Doc.: 5046 C549G-D

Continuous Operating Temperature  
+130°C (+266°F) Max.  
-60°C (-76°F) Min.

### FEATURES

The C2KX cable gland is suitable for use with armored and jacketed cables with wire braid armor. The cable gland provides mechanical retention and electrical continuity via the armor termination. The standard cable gland material is Electroless Nickel Plated Brass as pictured above. Optional materials are: Stainless Steel or Brass with Electroless Nickel Plated Brass entry component.



### Ordering Information (Dimensions in Inches)

C CABLE GLAND SIZE NPT	E MIN. THREAD LENGTH	A MAX. CABLE BEDDING DIA.	B OVERALL CABLE DIAMETER		ARMOR RANGE		D ACROSS		F NOM. PRO- TRUSION LENGTH	PVC SHROUD REF.	CATALOG NUMBER
			MIN.	MAX.	MIN.	MAX.	FLATS MAX.	CRNRS. MAX.			
1/2"	0.630	0.461	0.240	0.453	0.0	0.039	1.201	1.297	2.303	PVC06	20S16C2KX1RA531
1/2"	0.630	0.461	0.374	0.626	0.0	0.039	1.201	1.297	2.303	PVC06	20SC2KX1RA531
1/2"	0.630	0.551	0.492	0.823	0.0	0.039	1.201	1.297	2.382	PVC06	20C2KX1RA531
3/4"	0.669	0.787	0.551	0.866	0.0	0.039	1.476	1.594	2.657	PVC09	25SC2KX1RA532
3/4"	0.669	0.787	0.717	1.031	0.0	0.039	1.811	1.956	2.657	PVC09	25C2KX1RA532
1"	0.787	1.035	0.933	1.335	0.0	0.039	1.811	1.956	2.736	PVC11	32C2KX1RA533
1-1/4"	0.787	1.268	1.098	1.591	0.0	0.039	2.165	2.338	3.071	PVC15	40C2KX1RA534
1-1/2"	0.787	1.504	1.386	1.839	0.0	0.039	2.362	2.551	2.972	PVC18	50SC2KX1RA535
2"	0.906	1.736	1.591	2.091	0.0	0.039	2.760	2.981	3.169	PVC21	50C2KX1RA536
2"	0.906	1.969	1.795	2.339	0.0	0.039	2.953	3.189	3.602	PVC23	63SC2KX1RA536
2-1/2"	0.984	2.205	2.150	2.594	0.0	0.039	3.150	3.402	3.622	PVC25	63C2KX1RA537
2-1/2"	0.984	2.441	2.323	2.839	0.0	0.039	3.543	3.826	3.898	PVC28	75SC2KX1RA537
3"	1.417	2.677	2.626	3.091	0.0	0.039	3.937	4.252	4.016	PVC30	75C2KX1RA538
3-1/2"	1.417	3.150	3.000	3.559	0.0	0.063	4.528	4.890	4.724	PVC32	90C2KX1RA539


The standard Material is Fully Electroless Nickel Plated Brass, indicated by a 5 in the Catalog Number. For other Material Options change the 5 to the indicated number of the material options:

#### Insert Material Option

- 1- Aluminum
- 4- Stainless Steel
- 7- Brass with Electroless Nickel Plated Entry Component

### Technical Data

TYPE	C2KX
Standard Gland Material	Electroless Nickel Plated Brass
Optional Gland Material	Brass, Stainless Steel or Brass - Fully Electroless Nickel Plated
Seal Material	SOLO LSF Thermoplastic Elastomer
Cable Type	Armored & Jacketed
Armor Clamping	Detachable Armor Cone & AnyWay Universal Clamping Ring
Sealing Technique	Unique "LRS"™ Outer Seal (Load Retention Seal)
Sealing Area(s)	Cable Outer Jacket
Optional Accessories See page J9	Locknut, Shroud, Entry Thread Seal, Serrated Washer, Adapter/Reducer

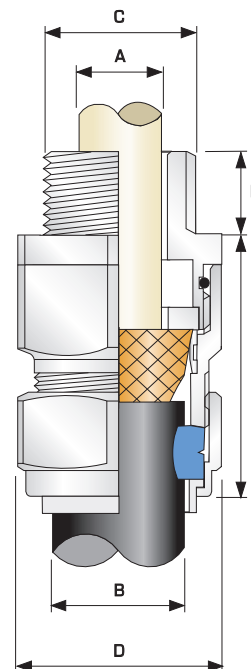

# T3CDS Cable Glands

FOR WET & HAZARDOUS LOCATIONS



## Ordering Information (Dimensions in Inches)

C CABLE GLAND SIZE NPT	E MIN. THREAD LENGTH	A CABLE BEDDING DIAMETER		B OVERALL CABLE DIAMETER		D ACROSS		F NOMINAL ASSMLD. LENGTH	PVC SHROUD REF.	CATALOG NUMBER
		MIN.	MAX.	MIN.	MAX.	FLATS MAX.	CRNRS. MAX.			
1/2"	0.630	0.122	0.343	0.240	0.519	0.945	1.021	2.756	PVC02	20S16T3CDS1RA531
1/2"	0.630	0.240	0.461	0.374	0.626	1.063	1.148	2.756	PVC04	20ST3CDS1RA531
1/2"	0.630	0.256	0.551	0.492	0.823	1.201	1.297	2.835	PVC06	20T3CDS1RA531
3/4"	0.669	0.437	0.787	0.551	0.866	1.476	1.594	3.228	PVC09	25ST3CDS1RA532
3/4"	0.669	0.437	0.787	0.717	1.031	1.811	1.956	3.228	PVC09	25T3CDS1RA532
1"	0.787	0.669	1.035	0.933	1.335	1.811	1.956	3.346	PVC11	32T3CDS1RA533
1-1/4"	0.787	0.866	1.268	1.098	1.591	2.165	2.338	3.386	PVC15	40T3CDS1RA534
1-1/2"	0.787	1.161	1.504	1.386	1.839	2.362	2.551	3.858	PVC18	50ST3CDS1RA535
2"	0.906	1.402	1.736	1.591	2.091	2.760	2.981	3.937	PVC21	50T3CDS1RA536
2"	0.906	1.579	1.969	1.795	2.339	2.953	3.189	4.252	PVC23	63ST3CDS1RA536
2-1/2"	0.984	1.858	2.205	2.150	2.594	3.150	3.402	4.355	PVC25	63T3CDS1RA537
2-1/2"	0.984	2.079	2.441	2.323	2.839	3.543	3.826	4.434	PVC28	75ST3CDS1RA537
3"	1.417	2.327	2.677	2.626	3.091	3.937	4.252	4.520	PVC30	75T3CDS1RA538
3-1/2"	1.417	2.622	3.126	3.000	3.559	4.850	5.238	5.512	PVC32	90T3CDS1RA539


The standard Material is Fully Electroless Nickel Plated Brass, indicated by a 5 in the Catalog Number. For other Material Options change the 5 to the indicated number of the material options:

### Insert Material Option

- 1- Aluminum
- 4- Stainless Steel
- 7- Brass with Electroless Nickel Plated Entry Component

## Technical Data

TYPE	T3CDS
Standard Gland Material	Electroless Nickel Plated Brass
Design Specifications	UL 514B
Seal Material	SOLO LSF Thermoplastic Elastomer
Cable Type	Armored & Jacketed, Wire Braid Armor, Served (Single) Wire Armor (SWA)
Armor Clamping	Reversible Armor Cone & AnyWay Universal Clamping Ring
Sealing Technique	Inner CDS System & Unique "LRS"™ Outer Seal (Load Retention Seal)
Sealing Area(s)	Cable Inner Bedding & Outer Jacket
Optional Accessories See page J9	Locknut, Shroud, Entry Thread Seal, Serrated Washer

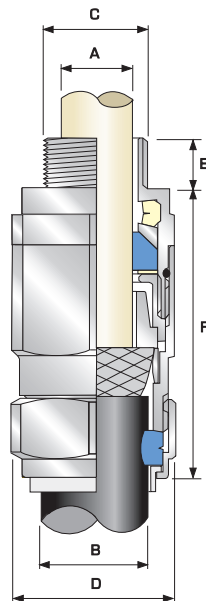

## Armor Range

GLAND SIZE NPT	GROOVED CONE		STEPPED CONE	
	MIN.	MAX.	MIN.	MAX.
1/2"	0.0	0.039	0.035	0.049
1/2"	0.0	0.039	0.035	0.049
1/2"	0.0	0.039	0.035	0.049
3/4"	0.0	0.039	0.049	0.063
3/4"	0.0	0.039	0.049	0.063
1"	0.0	0.039	0.063	0.078
1-1/4"	0.0	0.039	0.063	0.078
1-1/2"	0.0	0.039	0.078	0.098
2"	0.0	0.039	0.079	0.098
2"	0.0	0.039	0.079	0.098
2-1/2"	0.0	0.039	0.079	0.098
2-1/2"	0.0	0.039	0.098	0.118
3"	0.0	0.063	0.098	0.118
3-1/2"	0.0	0.063	0.124	0.157

NOTE: Stepped Cone is suitable for SWA cables.  
Grooved Cone is suitable for all other approved armored cables

# ACCESSORIES



## CLASSIFICATIONS

NEC- Class I, Zones 1 & 2, AEx e II  
Types 3, 4 & 4X, IP66, 67 & 68

NOTE: For IP67 and IP68 requirements the cable diameter "B" (minimum value) shown in table should be increased by 1.0 mm to ensure compliance.

## ATEX

SIRA 06 ATEX 1283X

SIRA 07 ATEX 4328X

II 2G Ex d IIC

II 2G Ex e II

II 3G Ex nR II

II 2D Ex tD A21 IP66

## IECEx

IECEx SIR 07.0005X

Ex d IIC

Ex e II

Ex nR II

Ex tD A21 IP66

CEC- Class I Zone 1 Ex d IIC / Ex e II  
Class I, Div. 2, Groups A,B,C & D  
Class II, Div. 2, Groups E,F & G  
Class III  
Types 3, 4 & 4X; IP66 & IP68



Certificate 1310517

## MARINE APPROVALS

Lloyds Approval No.: 01/00172

Gost K Cert. No.: KZ7500361.01.01.14761

RoK Approval No.: 08-06/7693

DNV Approval No.: E-10496

ABS Approval No.: 01-LD234401A/2-PDA

Ingress Prot. Doc.: ITS 03 1006/Issue 1

Deluge Prot. Compliance: DTS01 : 91

Deluge Prot. Doc.: ITS 01005029

## Continuous Operating Temperature

+130°C (+266°F) Max.

-60°C (-76°F) Min.

## FEATURES

The T3CDS cable gland is suitable for use with all types of armored and jacketed marine cables with wire braid armor or served (single) wire. The cable gland provides a seal on the cable inner bedding and an environmental seal on the cable outer jacket. The T3CDS incorporates a unique Compensating Displacement Seal (CDS) system which provides full compatibility with restricted breathing equipment. The cable gland provides mechanical cable retention and electrical continuity via armor wire termination. A reversible armor cone and AnyWay universal clamping ring allows easy disconnection in confined or areas of restricted access from equipment for maintenance or change out.



EXPLOSION PROTECTION by R. STAHL 1-800-782-4357



FOR WET & HAZARDOUS LOCATIONS



## CLASSIFICATIONS

NEC- Class I, Zone 1 & 2, AEx d II C  
 Class I, Div. 1 & 2, Groups A,B,C & D  
 Class II, Div. 1 & 2, Groups E,F & G  
 Ordinary & Wet Locations

## ATEX

SIRA 07 ATEX 1122X  
 Ex d IIC  
 II 2G Ex d IIC  
 II 2G Ex e II  
 II 2D Ex tD A21 IP66

## IECEX

IECEX SIR 07.0083X  
 Ex d IIC  
 Ex e II  
 Ex tD A21 IP66

CEC- Class I, Zone 1, Ex d IIC / Ex e II  
 Class I, Div. 1 & 2, Groups A,B,C & D  
 Class II, Div. 1 & 2, Groups E,F & G  
 Class III, Div. 1 & 2  
 Types 3, 4 & 4X; IP66 & IP68



Certificate No. 1129339

## MARINE APPROVALS

Lloyds Approval No.: 01/00172  
 Gost K Cert. No.: KZ7500361.01.01.14761  
 RoK Approval No.: 08-06/7693  
 DNV Approval No.: E-10496  
 ABS Approval No.: 01-LD234401A/2-PDA

## Continuous Operating Temperature

+85°C (+185°F) Max.  
 -60°C (-76°F) Min.

## FEATURES

The TMCX cable gland is suitable for all types of interlocked, continuously welded or corrugated metal clad armor cable and types MC, MC-HL or TECK armored and armored & jacketed cable. The cable gland provides mechanical retention and electrical continuity via the armor termination and an environmental seal on the cable outer jacket. TMCX allows for easy disconnection from equipment, for maintenance and change out. The gland utilizes a re-usable compression spring that provides grounding and gripping functions to the cable armor. The standard cable gland material is Copper Free Aluminum (<0.4%), as pictured above. Optional materials are: Stainless Steel or Electroless Nickel Plated Brass.

## Ordering Information (Dimensions in Inches)


C CABLE GLAND SIZE NPT	E ACTUAL THREAD LENGTH	A MAX. CABLE ARMOR DIA.				B CABLE JACKET DIAMETER		D ENVELOPE DIA. ACROSS		F NOMINAL ASSMLD. LENGTH	PVC SHROUD REF.	CATALOG NUMBER
		END STOP IN MIN.	END STOP OUT MAX.	MIN.	MAX.	MIN.	MAX.	FLATS	CRNRS.			
1/2"	0.79	—	—	0.342	0.503	0.354	0.550	1.18	1.31	2.20	PVC06	TMCX050SA
1/2"	0.79	—	—	0.437	0.669	0.550	0.787	1.42	1.57	2.20	PVC09	TMCX050A
3/4"	0.81	0.591	0.756	0.756	0.917	0.669	1.035	1.61	1.79	2.20	PVC11	TMCX075A
1"	0.99	0.775	0.969	0.969	1.150	0.910	1.268	1.96	2.18	2.24	PVC13	TMCX100A
1-1/4"	1.02	1.083	1.228	1.228	1.386	1.161	1.504	2.16	2.40	2.24	PVC15	TMCX125A
1-1/2"	1.04	1.320	1.461	1.461	1.618	1.402	1.736	2.36	2.62	2.37	PVC18	TMCX150A
2"	1.07	1.508	1.677	1.677	1.854	1.579	2.008	2.78	3.06	2.60	PVC21	TMCX200SA
2"	1.07	1.772	1.933	1.933	2.087	1.858	2.205	2.96	3.28	2.81	PVC23	TMCX200A
2-1/2"	1.58	2.052	2.161	2.161	2.320	2.079	2.441	3.14	3.49	2.88	PVC28	TMCX250SA
2-1/2"	1.58	2.247	2.406	2.406	2.545	2.327	2.677	3.35	3.71	2.88	PVC28	TMCX250A
3"	1.65	2.543	2.776	2.776	2.965	2.622	3.126	4.33	4.80	3.92	PVC31	TMCX300A
3-1/2"	1.69	2.913	3.291	3.291	3.485	2.992	3.830	5.25	5.82	4.61	—	TMCX350A
4"	1.74	—	—	3.500	4.020	3.700	4.220	5.25	5.84	7.66	—	TMCX400A

The standard Material is Copper Free Aluminum (<0.4%), indicated by an A at the end of the Catalog Number. For other Material Options change the A to the indicated letters of the material options:

Insert  
Material  
Option  
 SS- Stainless  
Steel  
 NB- Electroless  
Nickel Plated  
Brass

## Technical Data

TYPE	TMCX
Standard Gland Material	Copper Free Aluminum (<0.4%)
Optional Gland Material	Electroless Nickel Plated Brass, Stainless Steel
Seal Material	SOLO LSF Thermoplastic Elastomer / Epoxy Resin Barrier
Cable Type	Corrugated & Interlocked Metal Clad Armor or TECK, continuously Welded Metal Clad Armor
Armor Clamping	Earth Continuity in Contact with Metal Clad Armor (MC-HL)
Sealing Technique	Displacement Seal
Sealing Area(s)	Inner Compound Barrier & Cable Outer Jacket
Optional Accessories See page J9	Locknut, Shroud, Entry Thread Seal, Serrated Washer, Adapter/Reducer

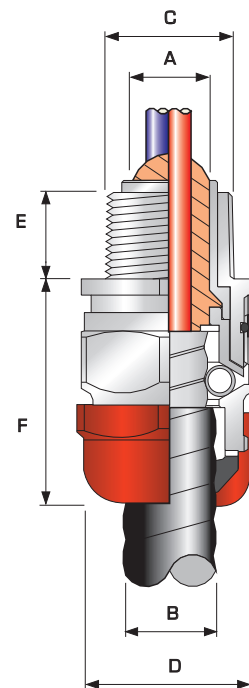

FOR WET & HAZARDOUS LOCATIONS



## Ordering Information (Dimensions in Inches)


C CABLE GLAND SIZE NPT	E ACTUAL THREAD LENGTH	A MAX. CABLE ARMOR DIA.				B CABLE JACKET DIAMETER		D ENVELOPE DIA. ACROSS		F NOMINAL ASSMLD. LENGTH	PVC SHROUD REF.	CATALOG NUMBER
		END STOP IN MIN.	END STOP IN MAX.	END STOP OUT MIN.	END STOP OUT MAX.	MIN.	MAX.	FLATS	CRNRS.			
1/2"	0.79	—	—	0.342	0.503	0.354	0.550	1.18	1.31	2.20	PVC06	TMC050SA
1/2"	0.79	—	—	0.437	0.669	0.510	0.787	1.42	1.57	2.20	PVC09	TMC050A
3/4"	0.81	0.591	0.756	0.756	0.917	0.669	1.035	1.61	1.79	2.20	PVC11	TMC075A
1"	0.99	0.775	0.969	0.969	1.150	0.910	1.268	1.96	2.18	2.24	PVC13	TMC100A
1-1/4"	1.02	1.083	1.228	1.228	1.386	1.161	1.504	2.16	2.40	2.24	PVC15	TMC125A
1-1/2"	1.04	1.320	1.461	1.461	1.618	1.402	1.736	2.36	2.62	2.37	PVC18	TMC150A
2"	1.07	1.508	1.677	1.677	1.854	1.579	2.008	2.78	3.06	2.58	PVC21	TMC200SA
2"	1.07	1.772	1.933	1.933	2.087	1.858	2.205	2.96	3.28	2.49	PVC23	TMC200A
2-1/2"	1.58	2.052	2.161	2.161	2.320	2.079	2.441	3.14	3.49	2.50	PVC28	TMC250SA
2-1/2"	1.58	2.247	2.406	2.406	2.545	2.327	2.677	3.35	3.71	2.52	PVC28	TMC250A
3"	1.65	2.543	2.776	2.776	2.965	2.622	3.126	4.33	4.80	3.57	PVC31	TMC300A
3-1/2"	1.69	2.91	3.291	3.291	3.485	2.992	3.830	5.25	5.82	4.61	—	TMC350A
4"	1.74	—	—	3.500	4.020	3.700	4.220	5.28	5.84	7.66	—	TMC400A

The standard Material is Copper Free Aluminum (<0.4%), indicated by an A at the end of the Catalog Number. For other Material Options change the A to the indicated letters of the material options:

**Insert Material Option**  
 SS- Stainless Steel  
 NB- Electroless Nickel Plated Brass

## Technical Data

TYPE	TMC
Standard Gland Material	Copper Free Aluminum (<0.4%)
Alternative Gland Material	Electroless Nickel Plated Brass, Stainless Steel
Seal Material	SOLO LSF Thermoplastic Elastomer
Cable Type	Corrugated & Interlocked Metal Clad Armor or TECK, continuously Welded Metal Clad Armor
Armor Clamping	Earth Continuity in Contact with Metal Clad Armor
Sealing Technique	Displacement Seal
Sealing Area(s)	Cable Outer Jacket
Optional Accessories See page J9	Locknut, Shroud, Entry Thread Seal, Serrated Washer, Adapter/Reducer

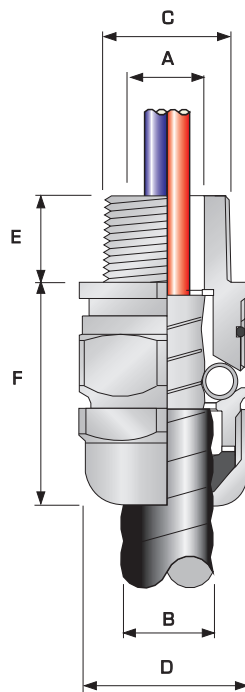

## CLASSIFICATIONS

NEC- Class I, Zone 1 & 2, AEx e II  
 Ordinary & Wet Locations

## ATEX

SIRA 07 ATEX 1122X  
 Ex II 2G Ex d IIC  
 II 2G Ex e II  
 II 2D Ex tD A21 IP66

## IECEX

IECEX SIR 07.0083X  
 Ex d IIC  
 Ex e II  
 Ex tD A21 IP66

CEC- Class I, Zone 1, Ex e II  
 Class II, Div. 1 & 2, Groups E, F & G  
 Class III, Div. 1 & 2  
 Types 3, 4, 4X; IP66



Certificate No. 1129339

## MARINE APPROVALS

Lloyds Approval No.: 01/00172  
 Gost K Cert. No.: KZ7500361.01.01.14761  
 RoK Approval No.: 08-06/7693  
 DNV Approval No.: E-10496  
 ABS Approval No.: 01-LD234401A/2-PDA

Continuous Operating Temperature  
 +130°C (+266°F) Max.  
 -60°C (-76°F) Min.

## FEATURES

The TMC cable gland is suitable for all types of interlocked, continuously welded or corrugated metal clad armor cable and types MC, MC-HL or TECK armored and armored & jacketed cable. The cable gland provides mechanical retention and electrical continuity via the armor termination and an environmental seal on the cable outer jacket. The TMC cable gland comes as standard in Aluminum, complete with O-Ring and Locknut. It allows for easy disconnection from equipment, for maintenance and change out. The gland utilizes a re-usable compression spring that provides grounding and gripping functions to the cable armor. The standard cable gland material is Copper Free Aluminum (<0.4%), as pictured above. Optional materials are: Stainless Steel or Electroless Nickel Plated Brass.

FOR WET & HAZARDOUS LOCATIONS



## CLASSIFICATIONS

NEC- Class I, Zone 1, AEx d IIC, AEx e II  
Class I, Div. 1 & 2, Groups A,B,C & D  
Class II, Div. 1 & 2, Groups E, F & G  
Types 4X; IP66, IP67, IP68

NOTE: For IP67 and IP68 requirements the cable diameter "B" (minimum value) shown in table should be increased by 1.0 mm to ensure compliance.

### ATEX

SIRA 06 ATEX 1097X  
SIRA 07 ATEX 4326X  
II 2G Ex d IIC  
II 2G Ex e II  
II 2G Ex nR IIII 2D Ex tD A21 IP66

### IECEX

IECEX SIR 06.0042X  
Ex d IIC  
Ex e II  
Ex nR II  
Ex tD A21 IP66

CEC- Class I, Zone 1, Ex d IIC, Ex e II  
Class I, Div. 1 & 2, Groups A,B,C & D  
Class II, Div. 1 & 2, Groups E, F & G

SA Certificate No. 2288626

### MARINE APPROVALS

Lloyds Approval No.: 01/00172  
Gost K Cert. No.: KZ7500361.01.01.14761  
RoK Approval No.: 08-06/7693  
DNV Approval No.: E-10496  
ABS Approval No.: 01-LD234401A/2-PDA  
Ingress Prot. Doc.: 5046 C549D  
Deluge Prot. Compliance: DTS01 : 91  
Deluge Prot. Doc.: 5046 C549D-D

Continuous Operating Temperature  
+85°C (+185°F) Max.  
-60°C (-76°F) Min.

### FEATURES

The PX2KXREX gland utilizes a liquid pour resin seal, that vastly reduces installation time and associated costs. This solution is particularly effective on multicore cables where traditional compound is difficult and time consuming to apply. PX2KX-REX Class I Division 1 ABCD Cable Gland for use with Armored & Jacketed cable providing a barrier seal around the cable conductors and an environmental seal on the cable outer jacket. In addition this cCSAus listed cable Gland provides mechanical cable retention and electrical continuity via armor termination. A detachable armor cone and AnyWay universal clamping ring arrangement allows the cable to be easily disconnected from the equipment.

## Ordering Information (Dimensions in Inches)


C CABLE GLAND SIZE NPT	E MIN. THREAD LENGTH	A MAX. DIA. OVER CNDCTR.	NO. OF CORES	B OVERALL CABLE DIAMETER		ARMOR RANGE		D ACROSS		F NOM. PRO- TRUSION LENGTH	PVC SHROUD REF.	CATALOG NUMBER
				MIN.	MAX.	MIN.	MAX.	FLATS MAX.	CRNRS. MAX.			
1/2"	0.591	0.496	11	0.240	0.453	0.0	0.039	1.201	1.297	2.303	PVC06	20S16PX2KXREX1RA531
1/2"	0.591	0.496	11	0.374	0.626	0.0	0.039	1.201	1.297	2.303	PVC06	20SPX2KXREX1RA531
1/2"	0.591	0.496	21	0.492	0.823	0.0	0.039	1.201	1.297	2.382	PVC06	20PX2KXREX1RA531
3/4"	0.591	0.689	38	0.551	0.866	0.0	0.039	1.476	1.594	2.657	PVC09	25SPX2KXREX1RA532
3/4"	0.591	0.689	38	0.717	1.031	0.0	0.039	1.811	1.956	2.657	PVC09	25PX2KXREX1RA532
1"	0.591	0.929	59	0.933	1.335	0.0	0.039	1.811	1.956	2.736	PVC11	32PX2KXREX1RA533
1-1/4"	0.591	1.181	89	1.098	1.591	0.0	0.039	2.165	2.338	3.071	PVC15	40PX2KXREX1RA534
1-1/2"	0.591	1.441	115	1.386	1.839	0.0	0.039	2.362	2.551	2.972	PVC18	50SPX2KXREX1RA535
2"	0.591	1.614	115	1.591	2.091	0.0	0.039	2.760	2.981	3.169	PVC21	50PX2KXREX1RA536
2"	0.591	1.886	140	1.795	2.339	0.0	0.039	2.953	3.189	3.602	PVC23	63SPX2KXREX1RA536
2-1/2"	0.591	2.114	140	2.150	2.594	0.0	0.039	3.150	3.402	3.622	PVC25	63PX2KXREX1RA537
2-1/2"	0.591	2.358	140	2.323	2.839	0.0	0.039	3.543	3.826	3.898	PVC28	75SPX2KXREX1RA537
3"	0.591	2.531	140	2.626	3.091	0.0	0.039	3.937	4.252	4.016	PVC30	75PX2KXREX1RA538
3-1/2"	0.591	2.965	140	3.00	3.559	0.0	0.063	4.528	4.890	4.724	PVC32	90PX2KXREX1RA539

The standard Material is Fully Electroless Nickel Plated Brass, indicated by a 5 in the Catalog Number. For other Material Options change the 5 to the indicated number of the material options:

- Insert Material Option**
- 1 - Aluminum
  - 4 - Stainless Steel
  - 7 - Brass with Electroless Nickel Plated Entry Component

## Technical Data

TYPE	PX2KX
Standard Gland Material	Electroless Nickel Plated Brass
Optional Gland Material	Aluminum or Stainless Steel
Sealing Material	SOLO LSF Thermoplastic Elastomer / Epoxy Resin Barrier Compound
Cable Type	Armored & Jacketed
Armor Clamping	Detachabe Compound Tube / Armor Cone & AnyWay Universal Clamping Ring
Sealing Technique	Unique "LRS" <sup>™</sup> Outer Seal (Load Retention Seal)
Sealing Area(s)	Inner Compound Barrier & Cable Outer Jacket
Optional Accessories See page J9	Locknut, Shroud, Entry Thread Seal, Serrated Washer, Adapter/Reducer

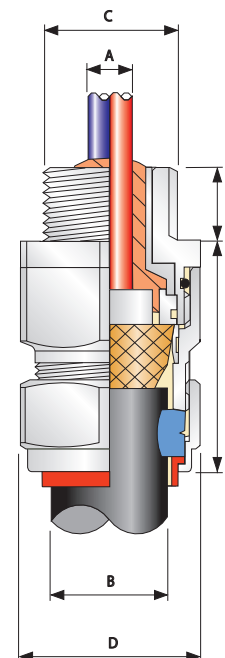

# PXSS2K REX Cable Glands

FOR WET & HAZARDOUS LOCATIONS



## Ordering Information (Dimensions in Inches)


C CABLE GLAND SIZE NPT	E MIN. THREAD LENGTH	A MAX. DIA. OVER CNDCTR.	NO. OF CORES	B OVERALL CABLE DIAMETER		D ACROSS		F NOM. PRO- TRUSION LENGTH	PVC SHROUD REF.	CATALOG NUMBER
				MIN.	MAX.	FLATS MAX.	CRNRS. MAX.			
1/2"	0.591	0.496	11	0.122	0.343	1.201	1.297	2.303	PVC04	20S16PXSS2KREX1RA531
1/2"	0.591	0.496	11	0.240	0.461	1.201	1.297	2.303	PVC04	20SPXSS2KREX1RA531
1/2"	0.591	0.496	21	0.256	0.551	1.201	1.297	2.382	PVC05	20PXSS2KREX1RA531
3/4"	0.591	0.689	38	0.437	0.787	1.417	1.530	2.657	PVC09	25PXSS2KREX1RA532
1"	0.591	0.929	159	0.669	1.035	1.614	1.743	2.736	PVC10	32PXSS2KREX1RA533
1-1/4"	0.591	1.181	89	0.866	1.264	2.614	1.743	3.071	PVC13	40PXSS2KREX1RA534
1-1/2"	0.591	1.441	115	1.161	1.504	1.969	2.127	2.972	PVC15	50SPXSS2KREX1RA535
2"	0.591	1.614	115	1.402	1.736	2.165	2.338	3.169	PVC18	50PXSS2KREX1RA536
2"	0.591	1.886	140	1.579	1.972	2.756	2.976	3.602	PVC21	63SPXSS2KREX1RA536
2-1/2"	0.591	2.114	140	1.858	2.205	2.756	2.976	3.622	PVC23	63PXSS2KREX1RA537
2-1/2"	0.591	2.358	140	2.079	2.441	3.150	3.402	3.898	PVC24	75SPXSS2KREX1RA537
3"	0.591	2.531	140	2.327	2.677	3.150	3.402	4.016	PVC26	75PXSS2KREX1RA538
3"	0.591	2.965	140	2.622	3.126	3.937	4.252	4.724	PVC31	90PXSS2KREX1RA538

The standard Material is Fully Electroless Nickel Plated Brass, indicated by a 5 in the Catalog Number. For other Material Options change the 5 to the indicated number of the material options:

- Insert Material Option**
- 1 - Aluminum
  - 4 - Stainless Steel
  - 7 - Brass with Electroless Nickel Plated Entry Component

## Technical Data

TYPE	PXSS2K
Standard Gland Material	Electroless Nickel Plated Brass
Optional Gland Material	Electroless Nickel Plated Brass, Aluminum or Stainless Steel
Seal Material	SOLO LSF Thermoplastic Elastomer / Epoxy Resin Barrier Compound
Cable Type	Non-Armored Marine & Tray Cable & Extra-Hard Usage Cord
Sealing Technique	Displacement Seal
Sealing Area(s)	Inner Compound Barrier & Cable Outer Jacket
Optional Accessories See page J9	Locknut, Shroud, Entry Thread Seal, Serrated Washer, Adapter/Reducer

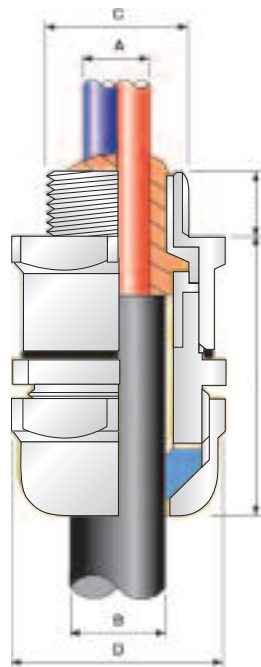

## ACCESSORIES



## CLASSIFICATIONS

NEC- Class I, Zone 1, AEx d IIC, AEx e II  
Class I, Div. 2, Groups A,B,C & D  
Class II, Div. 2, Groups F & G  
Types 4X; IP66, IP67, IP68

**NOTE:** For IP67 and IP68 requirements the cable diameter "B" (minimum value) shown in table should be increased by 1.0 mm to ensure compliance.

## ATEX

SIRA 06 ATEX 1097X  
SIRA 07 ATEX 4326X

Ex II 2G Ex d IIC  
Ex II 2G Ex e II  
Ex II 3G Ex nR II  
Ex II 2D Ex tD A21 IP66

## IECEX

IECEX SIR 06.0042X  
Ex d IIC  
Ex e II  
Ex nR II  
Ex tD A21 IP66

CEC- Class I, Div. 2, Groups A,B,C & D  
Class I, Div. 2, Groups F & G  
Ex d IIC, Ex e II



Certificate No. 2288626

## MARINE APPROVALS

Lloyds Approval No.: 01/00172  
Gost K Cert. No.: KZ7500361.01.01.14761  
RoK Approval No.: 08-06/7693  
DNV Approval No.: E-10496  
ABS Approval No.: 01-LD234401A/2-PDA  
Ingress Prot. Doc.: 5046 C549J  
Deluge Prot. Compliance: DTS01 : 91  
Deluge Prot. Doc.: 5046 C549J-D

## Continuous Operating Temperature

+85°C (+185°F) Max.  
-60°C (-76°F) Min.

## FEATURES

The PXSS2KREX gland utilizes a liquid pour resin seal, that vastly reduces installation time and associated costs. This solution is particularly effective on multicore cables where traditional compound is difficult and time consuming to apply. PXSS2K-REX Triple Certified Flameproof (Type 'd'), Increased Safety (Type 'e') and Restricted Breathing (Type'nR') cable gland for use in Zone 1, Zone 2, Zone 21 and Zone 22 Hazardous Areas with all types of unarmoured cable providing a barrier seal around the cable conductors and an environmental seal on the cable outer sheath. The cable gland provides mechanical cable retention. A combined detachable spacer and resin tube allows the cable to be easily disconnected from the equipment.



EXPLOSION PROTECTION by R. STAHL 1-800-782-4357

FOR WET & HAZARDOUS LOCATIONS

**Locknuts**




Electroless Nickel Plated Brass Locknuts are the recommended items for securing brass cable glands with nickel plated entry components.

This prevents the electrolytic action of galvanic corrosion which can occur when dissimilar metals are coupled together.

**Ordering Information**

A NPT THREAD DIAMETER	MIN. THICKNESS.		B ACROSS FLATS DIMENSIONS		C ACROSS CORNERS DIAMETER		CATALOG NUMBER
	IN.	(mm)	IN.	(mm)	IN.	(mm)	
1/2"	0.19	4.75	1.06	27.0	1.15	29.3	050NPTLN5
3/4"	0.19	4.75	1.30	33.0	1.41	35.8	075NPTLN5
1"	0.18	4.50	1.61	41.0	1.77	45.0	100NPTLN5
1-1/4"	0.19	4.75	1.97	50.0	2.10	53.4	125NPTLN5
1-1/2"	0.20	5.10	2.36	60.0	2.72	69.0	150NPTLN5
2"	0.20	5.10	2.76	70.0	3.16	80.2	200NPTLN5
2-1/2"	0.39	10.0	3.11	79.0	3.56	90.5	250NPTLN5
3"	0.39	10.0	4.25	108.0	4.84	123.0	300NPTLN5
3-1/2"	0.45	11.5	4.49	114.0	5.16	131.0	350NPTLN5

**Sealing Washers**

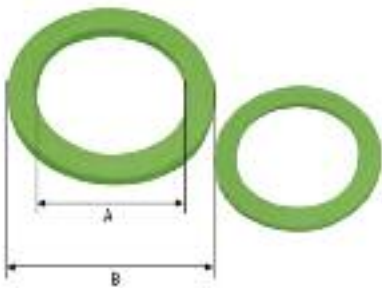


To maintain the Ingress Protection rating between the equipment and cable gland it is necessary to fit an Entry Thread Sealing washer at the gland entry interface.

**Ordering Information**

A NPT REF. DIAMETER	MIN. THICKNESS.		B EXTERNAL DIAMETER		CATALOG NUMBER
	IN.	(mm)	IN.	(mm)	
1/2"	0.08	2.0	1.13	28.6	050NPTETS
3/4"	0.08	2.0	1.38	35.0	075NPTETS
1"	0.08	2.0	1.75	44.5	100NPTETS
1-1/4"	0.08	2.0	2.00	50.8	125NPTETS
1-1/2"	0.08	2.0	2.56	65.0	150NPTETS
2"	0.08	2.0	3.00	76.2	200NPTETS
2-1/2"	0.08	2.0	3.74	95.0	250NPTETS
3"	0.08	2.0	4.33	110.0	300NPTETS

**Serrated Washers**

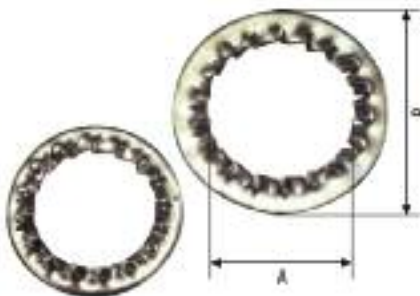

These stainless steel serrated washers fitted internally to the equipment, before the application of a locknut prevent the locknuts from loosening in service.

**Ordering Information**

A NPT REF. DIAMETER	MIN. THICKNESS.		B OUTER DIAMETER		CATALOG NUMBER
	IN.	(mm)	IN.	(mm)	
1/2"	0.15	3.7	1.26	32.0	050NPTSW4
3/4"	0.15	3.7	1.57	40.0	075NPTSW4
1"	0.15	3.7	1.73	44.0	100NPTSW4
1-1/4"	0.15	3.7	2.32	59.0	125NPTSW4
1-1/2"	0.15	3.7	3.15	80.0	150NPTSW4
2"	0.18	4.5	3.94	100.0	200NPTSW4
2-1/2"	0.20	5.0	4.41	112.0	250NPTSW4
3"	0.20	5.0	4.72	120.0	300NPTSW4
3-1/2"	0.25	6.3	5.91	150.0	350NPTSW4

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
180947	B7	6000/552-9521-0150	B1	6600/571-8020-8000	B9	8006/121-015	E2	8125001490	C20, F27
3706090	I4	6000/571-8021-0130	B1	6600/571-8020-8000	B9	8006/122-006	E2	8125002490	C20, F27
3746050	E7	6000/571-8521-0150	B1	6600/572-9020-7000	B9	8006/132-003	E2	8125003490	C20, F27
3746060	E7	6000/572-9021-0130	B1	6600/572-9020-8000	B9	8006/132-006	E2	8125004100	C20, F27
385 663 0	B6	6000/572-9521-0150	B1	8003/111-001	E2	8008/2-002	F11	8125004490	C20, F27
5036760	I4	6008/532-9021-2147	B2	8003/111-003	E2	8008/2-005	F11	8125802290	C20, F27
5156550	I4	6008/552-9021-2147	B2	8003/111-006	E2	8008/2-016	F11	8125803290	C20, F27
5156560	I4	6008/552-9621-2167	B2	8003/111-009	E2	8008/2-027	F11	8125902490	C20, F27
5156570	I4	6400/531-8021-7130	B3	8003/111-010	E2	8008/2-034	F11	8125904490	C20, F27
5158290	I4	6400/531-8021-8130	B3	8003/111-012	E2	8008/2-038	F11	8125906490	C20, F27
85879/41-505	D3	6400/531-8521-7150	B3	8003/111-015	E2	8008/2-040	F11	8125908490	C20, F27
6000033050	B8	6400/531-8521-8150	B3	8003/112-001	E2	8008/2-051	F11	8125/1041-2DP-12015	C16
6000034050	B8	6400/532-9021-7130	B3	8003/112-003	E2	8008/2-102	F12	8125/1051-2DP-06009	C16
6000035050	B8	6400/532-9021-8130	B3	8003/112-006	E2	8008/2-109	F12	8125/1051-2DP-10015	C16
6000801260	B6	6400/532-9521-7150	B3	8003/112-009	E2	8008/2-110	F12	8125/1051-2DP-12018	C16
6000801440	B7	6400/532-9521-8150	B3	8003/112-010	E2	8008/2-113	F12	8125/1061-2DP-06009	C16
6000802060	B6	6400/551-8021-7130	B3	8003/112-015	E2	8008/2-119	F12	8125/1061-2DP-10021	C16
6000802440	B7	6400/551-8021-8130	B3	8003/113-001	E2	8008/2-127	F12	8125/1061-2DP-12024	C16
6000802940	B7	6400/551-8521-7150	B3	8003/113-006	E2	8008/2-139	F12	8125/1071-2DP-06024	C16
6000803260	B6	6400/551-8521-8150	B3	8003/113-009	E2	8008/2-148	F12	8125/1071-2DP-06024	C16
6000803530	B8	6400/552-9021-7130	B3	8003/113-012	E2	802806167	F12	8125/1071-2DP-10036	C16
6000804530	B8	6400/552-9021-8130	B3	8003/121-006	E2	8030901400	F14	8125/1071-2DP-10036	C16
6000805530	B8	6400/552-9521-7150	B3	8003/121-009	E2	8040007550	F14	8125/1071-2DP-12045	C16
6000807750	B6	6400/552-9521-8150	B3	8003/121-010	E2	8040008550	F14	8125/1073-2DP-04018	C17
6000809750	B6	6400/571-8021-7130	B3	8003/121-012	E2	8040009550	F14	8125/1073-2DP-06024	C17
6000809900	B6	6400/571-8021-8130	B3	8003/122-001	E2	8040010550	F14	8125/1073-2DP-1/012	C17
6000817550	B6	6400/571-8521-7150	B3	8003/122-003	E2	8040806290	F14	8125/1073-2DP-10036	C17
6000818550	B6	6400/571-8521-8150	B3	8003/122-009	E2	8040/124-C150	F4	8125/1073-2DP-12045	C17
6000821550	B6	6400/572-9021-7130	B3	8003/122-010	E2	8040/124-N021	F4	8125/1083-2DP-04018	C17
6000907580	B8	6400/572-9021-8130	B3	8003/122-015	E2	8040/124-N164	F4	8125/1083-2DP-06024	C17
6000908580	B8	6400/572-9521-7150	B3	8003/123-001	E2	8040/124-N273	F4	8125/1083-2DP-06048	C17
6000909580	B8	6400/572-9521-8150	B3	8003/123-003	E2	8040/124-N385	F4	8125/1083-2DP-1/012	C17
6000910580	B8	6408/532-9027-5141	B4	8003/123-006	E2	8040/124-PLR0	F4	8125/1083-2DP-1/02	C17
6000911580	B8	6408/532-9027-7141	B4	8003/123-009	E2	8040/124-U011	F4	8125/1083-2DP-10036	C17
6000912580	B8	6408/532-9027-8141	B4	8003/123-010	E2	8040/144-02MN1	F3	8125/1083-2DP-10072	C17
6008812870	B8	6408/552-9027-5141	B4	8003/123-012	E2	8040/144-03MMN3	F3	8125/1083-2DP-12090	C17
6008814870	B8	6408/552-9027-7141	B4	8003/123-015	E2	8040/144-PLG0	F3	8125/1083-2DP-4018	C17
6008816870	B8	6408/552-9027-8141	B4	8003/131-001	E2	8040/144-PLR0	F3	8125/1093-2DP-04036	C17
6041804650	B6	6408/552-9627-5161	B4	8003/131-003	E2	8040/144-U2312	F3	8125/1093-2DP-06048	C17
6043802010	B8	6408/552-9627-7161	B4	8003/131-006	E2	8040/144-X011	F3	8125/1093-2DP-06096	C17
6044801740	B6	6408/552-9627-8161	B4	8003/132-001	E2	8040/144-Y012	F3	8125/1093-2DP-1/024	C17
6044804650	B6	6600/531-8020-7000	B10	8003/132-012	E2	8040/144-Y090	F3	8125/1093-2DP-10072	C17
8560019010	B8	6600/531-8020-8000	B9	8003/133-001	E2	8040/144-Y100	F3	8125/1093-2DP-10144	C17
6000/531-8021-0130	B1	6600/532-9020-7000	B9	8003/133-003	E2	8040/144-Y150	F3	8125/1093-2DP-12090	C17
6000/531-8521-0150	B1	6600/532-9020-8000	B9	8003/133-006	E2	8040/224-PLR0-U2312	F13	8125/1093-2DP-12180	C17
6000/532-9021-0130	B1	6600/551-8020-7000	B9	8003/133-010	E2	8040/224-PLR0-N021	F4	8125/2073-2DP-10036	C17
6000/532-9521-0150	B1	6600/551-8020-8000	B9	8003/133-012	E2	8040/334-PLR0-U011-U012	F4	8125/2073-2DP-12045	C17
6000/551-8021-0130	B1	6600/552-9020-7000	B9	8003/133-015	E2	8080006600	B8	8125/2083-2DP-10072	C17
6000/551-8521-0150	B1	6600/552-9020-8000	B9	8003/212-001	E2	80823002010	B6	8125/2083-2DP-12045	C17
6000/552-9021-0130	B1	6600/571-8020-7000	B9	8003/212-009	E2	8125001490	C20	8125/2083-2DP-12090	C17

Series 6000-6400-8003-8040-8125



# Appendix by Part Number

# INDEX

Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
8125/2093-2DP-10144	C17	8146/1071S-3DP-06024	C29	8146/5052-C7970	G1	8150/-0400-0600-230-3321	C5	8166/11-04-NE	C16, J1
8125/2093-2DP-12180	C17	8146/1071S-3DP-10036	C28	8146/5052-C7971	G1	8150/-0480-0787-230-3321	C5	8166/11-05-NE	C16, J1
8125/2093-2DP-12180	C17	8146/1071S-3DP-12045	C28	8146/5052-C7972	G1	8150/-0550-0360-...-3.1	C7, C13	8166/11-06-NE	C16, J1
8125/5041	F23, F25	8146/1073S-3DP-04018	C29	8146/5052-C7974	G1	8150/-0550-0360-230-3311	C3	8198005400	B6
8125/5051	F23, F25	8146/1073S-3DP-1/012	C29	8146/5052-C7975	G1	8150/-0600-0400-...-3.1	C7, C13	8166/11-03-NE	J1
8125/5061	F23, F25	8146/1073S-3DP-10036	C29	8146/5052-C8140	G1	8150/-0600-0400-150-3311	C3	8166/11-04-NE	J1
8125/5071	F23, F25	8146/1073S-3DP-12045	C29	8146/5052-C8141	G1	8150/-0600-0400-230-3311	C3	8166/11-05-NE	J1
8125/5073	D6	8146/1083-3DP-04018	C29	8146/5052-C8142	G1	8150/-0600-0600-...-3.1	C7, C13	8166/11	C20, F27
8125/5081	F24	8146/1083-3DP-06024	C29	8146/5052-C8143	G1	8150/-0600-0600-150-3311	C3	8166/11 part only	C32
8125/5083	D6	8146/1083-3DP-06048	C29	8146/5052-C8145	G1	8150/-0600-0600-230-3311	C3	8166/11-01-NE	C16, J1
8125/5091	F24	8146/1083-3DP-1/012	C29	8146/5061-3	F31, F33	8150/-0727-0360-...-3.1	C7, C13	8166/11-02-NE	C16, J1
8146001100	C20, C32, F27, F35	8146/1083-3DP-10036	C29	8146/5071-3	F32, F34	8150/-0727-0360-091-3311	C3	8166/11-07-NE	C16, J1
8146001490	C32, F35	8146/1083-3DP-10072	C29	8146/5081-3	F32, F34	8150/-0727-0360-150-3311	C3	8166/11-08-NE	C16, J1
8146003100	C20, F27, F35	8146/1083-3DP-12045	C29	8146/5091-3	F32, F34	8150/-0787-0480-...-3.1	C7, C13	8166/5	C17
8146004100	C20, C32, F27, F35	8146/1093-3DP-04036	C29	8146/5-602-0000	H2	8150/-0787-0480-230-3311	C3	8208/24-08-S002	F12
8146004490	C32, F35	8146/1093-3DP-06048	C29	8146/5-604-0000	H2	8150/5/0727-0360-091-3311	F18	8225001160	I4
8146005490	C32, F35	8146/1093-3DP-06096	C29	8146/5-606-0000	H2	8150/5-0176-0116-091-2311	F18	8264/6112-2	17, 111, 112, 18
8146006490	C32, F35	8146/1093-3DP-1/024	C29	8146/5-609-0000	H2	8150/5-0176-0116-091-3311	F17	8264/6114	17, 18, 19, 10
8146010490	C32, F35	8146/1093-3DP-10072	C29	8150/-0727-0360-190-3311	C3, C5	8150/5-0176-0176-091-2311	F17	8264/6212	18, 111, 112
8146010550	C32, F35	8146/1093-3DP-10144	C29	8150/-0176-0176-...-3.1	C3, C13, C7	8150/5-0176-0176-091-2311	F18	8264/6214	17, 18, 19, 10
8146011100	C20, F27	8146/1093-3DP-12090	C29	8150/-0200-0300-150-3321	C5	8150/5-0176-0176-091-3311	F17	8264/6222	17, 18, 111, 112
8146011490	C32, F35	8146/1093-3DP-12180	C29	8150/-0236-0176-...-3.1	C7, C13	8150/5-0236-0176-091-2311	F17	8264/6222	18, 111, 112
8146011550	C32	8146/173S-3DP-06024	C29	8150/-0236-0176-091-3311	C3	8150/5-0236-0176-091-2311	F18	8264/6223	17, 18, 111, 112
8146016550	C32, F35	8146/2031-3DP-12009	C28, C29	8150/-0300-0200-...-3.1	C3, C7	8150/5-0236-0176-091-3311	F17	8264/6224	17, 18, 19, 10
8146017550	C32	8146/2041-3DP-12015	C28, C29	8150/-0300-0400-150-3321	C5	8150/5-0236-0176-091-3311	F18	8264/6225	17, 18, 19, 11
8146022550	C32, F35	8146/2041-3DP-12045	C28	8150/-0300-0400-230-3321	C5	8150/5-0360-0176-091-2311	F17	8264/6323	17, 18, 111, 112
8146023550	C32, F35	8146/2051-3DP-10015	C28, C29	8150/-0360-0176-...-3.1	C3, C7, C13	8150/5-0360-0176-091-3311	F17	8264/6325	17, 18, 19, 10
8146031550	C32, F35	8146/2051-3DP-12018	C28, C29	8150/-0360-0176-091-3311	C3	8150/5-0360-0176-091-3311	F18	8264/6333	17, 18, 111, 112
8146032550	C32, F35	8146/2061-3DP-12024	C28, C29	8150/-0360-0176-150-3311	C3	8150/5-0360-176-091-2311	F18	8264/6335	17, 18, 19
8146038550	C32	8146/2071S-3DP-10036	C28, C29	8150/-0360-0360-...-3.1	C7, C13	8150/5-0360-360-091-2311	F18	8264/6933	17, 18, 111, 112
8146039550	C32	8146/2073S-3DP-10036	C29	8150/-0360-0360-091-3311	C3	8150/5-0360-360-091-3311	F18	8264/6935	17, 18, 19, 10, 112
8146040550	C32	8146/2073S-3DP-12045	C29	8150/-0360-0360-150-3311	C3, C5	8150/5-0727-0360-091-2311	F18	8264/6993	17, 18, 111, 112
8146041550	C32, F35	8146/2083-3DP-10036	C29	8150/-0360-0360-150-3321	C5	8150/5-0727-0360-091-3311	F18	8264/6995	17, 18, 19, 10
8146042550	C32	8146/2083-3DP-10072	C29	8150/-0360-0360-190-3311	C3, C5	8150/5-0727-360-091-2111	F18	82650005140	I4
8146043550	C32	8146/2083-3DP-1204	C32	8150/-0360-0360-190-3321	C5	8150/5-236-0176-091-2311	F17	82650005160	I4
8146054550	C32, F35	8146/2083-3DP-12090	C32	8150/-0360-0360-230-3311	C3	8150/5-360-0176-091-2311	F17	826590550020	I4
8146942980	I4	8146/2093-3DP-10072	C29	8150/-0360-0550-230-3321	C5	8150/5-360-0176-091-2311	F18	826590550030	I4
8146943980	I4	8146/2093-3DP-10144	C29	8150/-0360-0727-150-3321	C5	8150/5-360-0176-091-3311	F18	826590550040	I4
8146949980	I4	8146/2093-3DP-12090	C29	8150/-0360-0900-230-3321	C5	8150/5-360-360-091-2311	F18	826590550060	I4
8146950980	I4	8146/2093-3DP-12180	C29	8150/-0360-1100-230-3321	C5	8150/5-360-360-091-3311	F18	826590980010	I4
8146954980	I4	8146/5031	F31, F33	8150/-0360-1300-230-3321	C5	8150-0176-0176-091-3311	F18	826590980020	I4
8146955980	I4	8146/5041	F31, F33	8150/-0400-0300-...-3.1	C7, C13	8161003910	F14	826590980030	I4
8146/1031-3DP-12009	C28	8146/5051	F31, F33	8150/-0400-0300-150-3311	C3	8161/5-M25-17	F14	826590980040	I4
8146/1041-3DP-12015	C28	8146/5052-C773	G1	8150/-0400-0300-230-3311	C3	8166/11-02-N	B7	826590980050	I4
8146/1051-3DP-06009	C28	8146/5052-C7960	G1	8150/-0400-0400-...-3.1	C7, C13	8162003010	J2	8265/52-2500-160	H10
8146/1051-3DP-10015	C28	8146/5052-C7961	G1	8150/-0400-0400-150-3311	C3	8162004020	F14	8265/62	12, 15
8146/1051-3DP-12018	C28	8146/5052-C7962	G1	8150/-0400-0400-150-3321	C5	8162005020	J2	8265/62-0000	I1
8146/1061-3DP-06009	C28	8146/5052-C7963	G1	8150/-0400-0400-230-3311	C3	8162801520	J2	8265/62-0020	11, 14
8146/1061-3DP-10021	C28	8146/5052-C7964	G1	8150/-0400-0400-230-3321	C5	8162/9	F14	8265/63	12, 15
8146/1061-3DP-12024	C28	8146/5052-C7965	G1	8150/-0400-0600-150-3321	C5	8166/11-03-NE	C16, J1	8265/63-0000	11, 14

Series 8146-8150-8166-8264



Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page	Part Number	Page
8265/63-0020	I1,I4	8560/51-4183	F37	8562/53-3430-080	H9	8565/11-1050-030	H11	8602902840	E7, F14
8265/64	I2,I5	8560/51-4193	F37	8562/53-3430-100	H9	8565/11-1300-015	H11	8602903840	E7,F14
8265/64-0000	I1,I4	8560/51-4222	F37	8562/53-3430-150	H9	8565/11-1300-020	H11	8602905840	E7,F14
8265/64-0020	I1,I4	8560/51-4252	F37	8562/53-3430-160	H9	8565/11-1300-030	H11	8602906840	E7,F14
8265/66	I2,I5	8560/51-4272	F37	8562/53-3430-200	H9	8565/11-1050-015	H11	8602907840	E7,F14
8265/66-0000	I1,I4	8562/51-1430-003	H9	8562/53-3610-320	H9	8570/21-304	D1	8602908840	E7, F14
8265/66-0020	I1,I4	8562/51-1430-005	H9	8562/53-3610-400	H9	8570/21-307	D1	8602908850	E7,F14
8290/3-M25	F14	8562/51-1430-008	H9	8562/54-4512-250	H10	8570/21-405	D1	8602909840	E7,F14
8295939370	F14	8562/51-1430-010	H9	8562/51-1430-002	H9	8570/21-407	D1	86020727-1-3-tr-V	F8
8405/2-1/2	F13	8562/51-1430-020	H9	8562/51-1430-016	H9	8570/21-507	D1	8602A0002-1-S	F7
8403/2-0,0,04	F38	8562/51-1430-030	H9	8562/51-1610-400	H9	8570/21-509	D1	8602A0008-1-2-r-V-MS1	F8
8403/2-1/2	F38	8562/51-1430-040	H9	8562/52-2430-002	H9	8570/21-306	D1	8602A0009-1-S-MS1	F7
8403/2-10/20	F38	8562/51-1430-050	H9	8562/52-2430-010	H9	8570/21-409	D1	8602A0010-1-S	F7
8403/2-15/30	F38	8562/51-1430-060	H9	8562/52-2430-150	H9	8570/21-505	D1	8602A0023-1-S	F7
8403/2-25/50	F38	8562/51-1430-080	H9	8562/53-2501-160	H10	8570/22-304	D1	8602A0726-1-3-tr-V	F8
8403/2-25/52	F38	8562/51-1430-100	H9	8562/53-2502-160	H10	8570/22-306	D1	8602A0732-1	F12
8403/2-25/53	F38	8562/51-1430-150	H9	8562/53-2503-160	H10	8570/22-505	D1	8602-A0735-1	F10
8403/2-25/54	F38	8562/51-1430-160	H9	8562/53-2504-160	H10	8570/22-304	D1,D7	8602-A0737-1	F10
8403/2-25/55	F38	8562/51-1430-200	H9	8562/53-2505-160	H10	8570/22-306	D1,D7	8602-A0738-1	F10
8403/2-25/56	F38	8562/51-1430-250	H9	8562/53-2507-160	H10	8570/22-307	D1,D7	8602-A0739-1	F10
8403/2-4/8	F38	8562/51-1610-300	H9	8562/53-2510-400	H10	8570/22-405	D1,D7	8602A0751	F14
8405/20,02/04	F13	8562/51-1610-320	H9	8562/53-2511-250	H10	8570/22-407	D1,D7	8602A0753	F14
8405/2-10/20	F12	8562/52-2430-003	H9	8562/53-2511-400	H10	8570/22-409	D1,D7	8602A0754	F14
8405/2-15/30	F12	8562/52-2430-005	H9	8562/53-2512-250	H10	8570/22-505	D1,D7	8602A0755	F14
8405/2-4/8	F12	8562/52-2430-008	H9	8562/53-2512-400	H10	8570/22-507	D1,D7	8602A0756	F14
8415/24-50-A-9	E9	8562/52-2430-016	H9	8562/53-2514-250	H10	8570/22-509	D1,D7	8602A0757	F14
8415/24-50-B-9	E9	8562/52-2430-020	H9	8562/53-2514-400	H10	8571/21-505	D1,D7	8602A0758	F14
8415/24-50-G-9	E9	8562/52-2430-030	H9	8562/53-2515-250	H10	8571/21-509	D1,D7	8602A0765	F14
8415/24-50-R-9	E9	8562/52-2430-040	H9	8562/53-2515-400	H10	8571/21-405	D1,D7	8602A4-0734	F12
8415/24-50-W-9	E9	8562/52-2430-050	H9	8562/53-2517-250	H10	8571/21-409	D1,D7	8602909850	E7,F14
8415/24-A-9	E9	8562/52-2430-060	H9	8562/53-2517-400	H10	8571/21-507	D1,D7	8602911850	E7,F14
8415/24-B-9	E9	8562/52-2430-080	H9	8562/53-3430-002	H9	8571/22-405	D1,D7	8602912840	E7, F14
8415/24-G-9	E9	8562/52-2430-100	H9	8562/53-3430-003	H9	8571/22-407	D1,D7	8602918850	E7,F14
8415/24-R-9	E9	8562/52-2430-160	H9	8562/53-3430-250	H9	8571/22-409	D1,D7	8602910850	E7, F14
8415/24-W-9	E9	8562/52-2430-200	H9	8562/53-3610-300	H9	8571/22-505	D1,D7	8602911840	E7, F14
8520-2510-250	H10	8562/52-2430-250	H9	8562/54-4510-250	H10	8571/22-507	D1,D7	8602920800	E7,F14
8560/51-40103	F37	8562/52-2610-300	H9	8562/54-4510-400	H10	8571/22-509	D1,D7	8602923840	E7, F14
8560/51-4023	F37	8562/52-2610-320	H9	8562/54-4511-250	H10	8579/41-407	D3	8602923856	E7,F14
8560/51-4033	F37	8562/52-2610-400	H9	8562/54-4511-400	H10	8579/41-409	D3	8602925580	E7,F14
8560/51-4043	F37	8562/53-2513-250	H10	8562/54-4512-250	H10	8579/22-407	D3	8602925840	E7, F14
8560/51-4053	F37	8562/53-2513-400	H10	8562/54-4513-250	H10	8579/22-409	D3	8602926580	E7, F14
8560/51-4063	F37	8562/53-3430-005	H9	8562/54-4513-400	H10	8579/41-405	D3	8602927580	E7, F14
8560/51-4073	F37	8562/53-3430-008	H9	8562/54-4514-250	H10	8579/41-507	D3	8602928280	E7, F14
8560/51-4083	F37	8562/53-3430-010	H9	8562/54-4514-400	H10	8579/41-509	D3	8602929580	E7, F14
8560/51-4093	F37	8562/53-3430-016	H9	8562/54-4515-250	H10	8602024030	E7	8602930856	E7, F14
8560/51-4113	F37	8562/53-3430-020	H9	8562/54-4515-400	H10	8602801587	F14	8602931856	E7, F14
8560/51-4133	F37	8562/53-3430-030	H9	8562/54-4517-250	H10	8602801587	E7	8602932840	E7, F14
8560/51-4143	F37	8562/53-3430-040	H9	8562/54-4517-400	H10	8602803587	F9	8602932850	E7, F14
8560/51-4153	F37	8562/53-3430-050	H9	8565/11-1050-020	H11	8602901840	E7, F14	8602932856	E7, F14
8560/51-4173	F37	8562/53-3430-060	H9	8565/11-1050-025	H11	8602901850	E7, F14	8602932856	E7, F14



8602933856	E7, F14	20ST3CDS1RA531	J4	862A0001-1-S	F7
8602933856	E7, F14	20T3CDS1RA531	J4	862A0012-1-S	F7
8602934856	E7, F14	250NPTETS	J9	862A0015-1-S	F7
8602934856	E7, F14	250NPTLN5	J9	862A0726-1-2-r	F8
8602935856	E7, F14	250NPTSW4	J9	862A0727-1-2-r-V	F8
8602935856	E7, F14	25C2KX1RA532	J3	862A1-SS-0731	F12
8602940850	E7, F14	25PX2KXREX1RA532	J7	90C2KX1RA539	J3
8800/23	D6	25PXSS2KREX1RA532	J8	90PX2KXREX1RA539	J7
8800/231-0-21-304	D7	25SC2KX1RA532	J3	90PXSS2KREX1RA538	J8
8800/231-0-21-306	D7	25SPX2KXREX1RA532	J7	90T3CDS1RA539	J4
8800/231-0-21-307	D7	25ST3CDS1RA532	J4	FL6 Series	G2,G3
8800/231-0-21-405	D7	25T3CDS1RA532	J4	PD-E-4-0-29-00	B7
8800/231-0-21-407	D7	300NPTETS	J9	PD-E-4-0-30-00	B7
8800/231-0-21-409	D7	300NPTLN5	J9	R-21	F14
8800/231-0-21-505	D7	300NPTSW4	J9	TMC 050A	B7
8800/231-0-21-507	D7	32C2KX1RA533	J3	TMC 075A	B7
8800/232-0-21-405	D1,D7	32PX2KXREX1RA533	J7	TMC050A	J6
8800/232-0-21-407	D1,D7	32PXSS2KREX1RA533	J8	TMC050SA	J6
8800/232-0-21-409	D1,D7	32T3CDS1RA533	J4	TMC075A	J6
8800/232-0-21-505	D1,D7	350NPTLN5	J9	TMC100A	J6
8800/232-0-21-507	D1,D7	350NPTSW4	J9	TMC125A	J6
8800/232-0-21-509	D1,D7	40C2KX1RA534	J3	TMC150A	J6
125NPTETS	J9	40PX2KXREX1RA534	J7	TMC200A	J6
125NPTLN5	J9	40PXSS2KREX1RA534	J8	TMC200SA	J6
125NPTSW4	J9	40T3CDS1RA534	J4	TMC250A	J6
150NPTETS	J9	50C2KX1RA536	J3	TMC250SA	J6
150NPTLN5	J9	50PX2KXREX1RA536	J7	TMC300A	J6
150NPTSW4	J9	50PXSS2KREX1RA536	J8	TMC350A	J6
200NPTETS	J9	50SC2KX1RA535	J3	TMC400A	J6
050NPTETS	J9	50SPX2KXREX1RA535	J7	TMCX050A	J5
050NPTLN5	J9	50SPXSS2KREX1RA535	J8	TMCX050SA	J5
050NPTSW4	J9	50ST3CDS1RA535	J4	TMCX075A	J5
075NPTETS	J9	50T3CDS1RA536	J4	TMCX100A	J5
075NPTLN5	J9	63C2KX1RA537	J3	TMCX125A	J5
075NPTSW4	J9	63PX2KXREX1RA537	J7	TMCX150A	J5
100NPTETS	J9	63PXSS2KREX1RA537	J8	TMCX200A	J5
100NPTLN5	J9	63SC2KX1RA536	J3	TMCX200SA	J5
100NPTSW4	J9	63SPX2KXREX1RA536	J7	TMCX250A	J6
200NPTLN5	J9	63SPXSS2KREX1RA536	J8	TMCX250SA	J6
200NPTSW4	J9	63T3CDS1RA536	J4	TMCX300A	J6
20C2KX1RA531	J3	63T3CDS1RA537	J4	TMCX350A	J6
20PX2KXREX1RA531	J7	75C2KX1RA538	J3	TMCX400A	J6
20PXSS2KREX1RA531	J8	75PX2KXREX1RA538	J7	Y06 Series	G2,G3
20S16C2KX1RA531	J3	75PXSS2KREX1RA538	J8	YL6 Series	G2,G3
20S16PX2KXREX1RA531	J7	75SC2KX1RA537	J3		
20S16PXSS2KREX1RA531	J7	75SPX2KXREX1RA537	J7		
20S16T3CDS1RA531	J4	75SPXSS2KREX1RA537	J8		
20SC2KX1RA531	J3	75T3CDS1RA537	J4		
20SPX2KXREX1RA531	J7	75T3CDS1RA538	J4		
20SPXSS2KREX1RA531	J8	861A0013-1-S	F7		



R. STAHL, INC.

9001 Knight Road

Houston, TX 77054

Telephone (800) 782-4357

Fax (713) 797-0105

Email: [sales@rstahl.com](mailto:sales@rstahl.com)

➔ [www.rstahl.com](http://www.rstahl.com)



ID-No. 00 006 51 78 0

S-EC-2012-00-us-03/2012 - Printed in the United States